

# DEWALT®



## POWERTOOLS CATALOGUE 2015-16

# DEWALT®

## CONSTRUCTION SOLUTIONS

Rather than developing products in isolation, DEWALT design complete application solutions to meet the needs of modern construction professionals

These are tools that work together effectively to complete projects faster & achieve better quality output

These include:

- Powerful Rotary Hammers that hit harder & protect the user from vibration
- Long lasting drill bits that remove material faster and drill more concentric holes for fastenings
- Innovative fastening solutions - designed to offer reliability in the most extreme conditions
- Dust extraction systems that increase drilling speed and protect the user from long-term damage
- Modular jobsite storage systems engineered to withstand the tough construction site environment

All of these components combined make DEWALT end-users more productive

Visit [www.DEWALT.ae](http://www.DEWALT.ae) for more information



## WHY DEWALT?

### END USER RESEARCH

On average, we speak to 20,000 users every year as part of the product development process

A comprehensive understanding of the real applications that our users perform enables us to generate product features that are a genuine benefit to our users

### INNOVATIVE PRODUCTS

To support our users and drive our industry forward, DEWALT consistently develop truly innovative products, across multiple categories

This technical strength is regularly recognised by international design awards

### USER LOYALTY

DEWALT guarantees to deliver and service high performance solution that enable the end-user to achieve productive and professional results

The cast-iron DEWALT guarantee and premium service network ensure that our users have faith in the quality of our products. First-time buyers will become loyal DEWALT users

**XR**  
**LITHIUM ION**

**BRUSHLESS**

### EVOLUTION OF DEWALT LI-ION CORDLESS DRILLS

Tough tools engineered for extreme environments.

Efficient gearboxes increase runtime and durability. Intelligent electronics module improves performance.

BRUSHLESS MOTORS reduce friction - better runtime and longer tool life. High capacity battery packs offer even longer run-time in a very compact size.




**EXTREME RUNTIME**



2 Speed transmission  
0-2000RPM for fast application speed



All metal chuck delivers improved durability and solid bit grip



Intelligent switch module delivers optimum speed control



LED Worklight  
Located on base to eliminate chuck shadow



High capacity battery packs Available as 5.0AH, 4.0AH or new lightweight 2.0AH execution

**2.0**  
**AH**

**4.0**  
**AH**

**5**  
**AH**

# PERFORM PROTECT™

DEWALT® is constantly pushing the boundaries to create the most innovative tools for the construction professional. Power tools which carry the Perform & Protect shield have passed rigorous testing to ensure they exceed the highest demands of the toughest environments, while maintaining a fundamental emphasis on safety. All of these products have to meet strict criteria in one or more of the following core areas: Control; Vibration; Dust.

## CONTROL



Bind-up situations can occur when drilling, cutting, or grinding. These sudden torque reactions, when the tool body rotates, can potentially damage the tool or injure the user.

The Perform & Protect shield for CONTROL shows which products have additional features to help in those critical bind-up situations.

- The three different systems are:
- 2 Stage Clutch for Rotary Hammers
- Anti rotation System for Rotary hammers
- Electronic Clutch for drills and grinders



**DUST**  
Industry leading dust extraction solutions



**CONTROL**  
Unique and innovative torque control features



**VIBRATION**  
Up to 50% lower vibration\*

## DUST



Airborne dust inhalation can lead to a number of long-term health conditions such as silicosis and chronic obstructive pulmonary disease (COPD). When the Perform & Protect shield is awarded for DUST, it is guaranteed the potential of inhaling dust is reduced to give a cleaner and safer working environment.

## VIBRATION



Vibration exposure can cause a range of conditions collectively known as hand-arm vibration syndrome (HAVS). Other conditions include carpal tunnel syndrome and vibration white finger.

When the Perform & Protect shield is awarded for Vibration, it is guaranteed that Tri-Axial vibration levels have been reduced, increasing usage time without reducing performance.

- Three different anti-vibration systems are:
- Active Vibration Control
- Floating back handle
- Counter Balance System



### CONVENIENCE

At the heart of the DEWALT 5 star service promise are 5 star service agents which are conveniently located throughout the country, with specialists always available to answer any questions whether you are on or off the jobsite.

### SPEED

Having your tools back in action in the fastest time possible is our prime objective. Subject to parts availability, most repairs should not take more than 48 hours in the workshop and for those smaller urgent repairs we provide a "while-u-wait" service.

### QUALITY

Highest Quality is assured with DEWALT factory trained technicians carrying out all repairs with all work being backed by our 90 day warranty. Each DEWALT repair comes with our personal "satisfaction tag" listing all the work done and a DEWALT contact telephone number should you be less than 100% happy with the repair.

### GENUINE PARTS

All parts used in repairs are original, ensuring both the highest quality and a perfect fit every time.

### ONLINE SERVICE

www.2helpU.com provides information on the DEWALT After Sales Services, including DEWALT authorised repair agent locations, some frequently asked questions, technical information, spare part details, warranty policy and recycling of used tools. You can also contact us directly via the website

**www.2helpU.com**

Not all DEWALT service agents are 5 star rated. Those that are not may not be able to provide all services available above but will display in-store a detailed list of their selected services.



DEWALT fixed price service plans for hammers offer complete peace of mind with no unexpected costs

### PLAN COVERAGE

Wear and tear	✓
Manufacturing defects	✓
Brush change	✓
Genuine DEWALT parts & Retest	✓
Transportation of the hammer to and from site or dealer	✓

2 year plans available

- Guaranteed fixed costs
- Fast service turn around
- Convenience

For more details, please reach us at: dewalt.marketing@sbdinc.com

**CORDLESS XR LITHIUM**

The 10.8V XR Li-Ion System ..... 14

The 14.4V XR Li-Ion System ..... 16

XR Li-Ion Charger/Radio ..... 18

Bluetooth Adapter ..... 19

XR Bluetooth Speaker ..... 19

XR Li-Ion Wet&Dry Vacuum ..... 20

The 18V XR Li-Ion System ..... 23

The 7.2V System ..... 35

The 36V Heavy Duty System ..... 37

**XR COMBO KITS**

The 10.8V XR system ..... 30

The 14.4V XR system ..... 30

The 18V XR system ..... 30

The 18V XR Li-Ion system ..... 31

**CONSTRUCTION INSTRUMENTS**

Pointers ..... 40

Line Lasers ..... 40

Optics ..... 41

Rotary Laser Kit ..... 41

Laser Distance Meter ..... 42

**DRILLING & SCREWDRIVING**

Drywall Screwdriver ..... 45

Veracatch Screwdriver..... 45

Self Drilling..... 46

Impact Wrench..... 46

Drills..... 47

Percussion Drill..... 47

Rotary Drills..... 49

Magnetic Drill..... 51

Diamond Drill..... 52

Drilling Stands..... 52

Tile & Masonary ..... 53

**HAMMERS**

Compact Hammers..... 55

Mid Size Hammers..... 57

Demolition Hammers ..... 60

**DUST MANAGEMENT**

Dust Extraction/Blowers..... 63

**METAL WORKING**

Small Angle Grinders..... 67

Medium Angle Grinders..... 69

Grinding Attachment ..... 70

Large Angle Grinders..... 70

Chop Saws..... 71

Polisher..... 72

**WOOD WORKING**

Routers..... 74

Laminate Trimmer..... 78

Jointers..... 78

Planers..... 78

Orbital Sanders..... 79

Random Sanders..... 80

Bench Grinder..... 81

Heat Gun..... 81

**SAWING**

Multi Tool..... 82

Plunge Saws..... 82

Jig Saws..... 83

Reciprocating Saws..... 84

Aligator Saws..... 85

**MITRE SAWS**

Cross Cut Mitre Saw..... 88

Compound Slide Mitre Saw..... 88

Table Top Mitre Saw..... 89

**MACHINERY**

Table saws..... 92





















Combination Saws..... 93






















Radial Arm Saws..... 95

Band Saws..... 96

Thicknesser..... 96

**THE ICONS UNDER EACH TOOL INDICATE THE PRODUCT FEATURES. CHECK DETAILS FOR INFORMATION.**

-  **DRILLING/CHISELLING MODES**  
Single mode for chiselling only
-  **TWO MODE**  
For rotary and hammer drilling
-  **THREE MODE**  
For rotary, hammer drilling and chiselling
-  **IMPACT MECHANISM**  
Uses rotary impacts to generate extremely high torque
-  **TWO AND THREE SPEED SELECTOR**  
Many DeWALT tools are available with multiple speeds to offer greater control in a variety of applications
-  **CONSTANT SPEED**  
A constant speed is maintained under operational load
-  **ELECTRONIC VARIABLE SPEED CONTROL**  
The speed can be adjusted from low to high giving greater control in each application
-  **SOFT START**  
Electronic soft start to limit start-up current and reduce kick reaction which could misalign the accessory
-  **LOW VIBRATION SIDE HANDLE**  
Low-Vibration side handle with a damped mechanism
-  **ANTI-MASS**  
Anti-Mass Counter-balance system helps reduce vibration
-  **SUSPENDED HANDLES**  
Suspended handles dramatically reduce vibration, increasing productivity and end user comfort.
-  **ANTI-VIBRATION FLOATING HANDLE**  
No matter where it is pressed, the whole handle is completely dampened from top to bottom reducing the vibration to the user.
-  **WET & DRY**  
Tool is designed to work with water feed
-  **3-POSITION KEYLESS SHOE**  
To maximise blade life
-  **4-POSITION KEYLESS BLADE CLAMP**  
Allows quick blade change, flush cutting and versatility
-  **PLUNGE ACTION**  
Parallel plunge action for accuracy and cut finish
-  **GUIDE RAIL COMPATABLE**  
Tool can be used with DeWALT guide rail system
-  **CLUTCH**  
Clutch protects the operator against kick back and the tool against overload should the accessory jam
-  **TOOL FREE ADJUSTMENT**  
The accessory in use, guard or shoe of the tool can be changed or adjusted without the need of a screwdriver, key or spanner
-  **AIRLOCK**  
Part of the Airlock system

-  **KEYLESS CHUCK**
-  **QUICK CHANGE CHUCK**  
Ideal solution to change easily between SDS and 3 jaw chuck systems
-  **SPINDLE LOCK**  
Spindle is locked by pushing a button allowing quick and easy change of accessories
-  **FORWARD AND REVERSE**  
Forward and reverse action for screwdriving applications
-  **PENDULUM BLADE ACTION**  
Adjustable pendulum blade action provides improved cutting performance in comparison to a conventional blade action
-  **DUST EXTRACTION**  
Dust Extraction into either a dust bag on the tool or through an attachment to a dust extraction unit
-  **EASILY ACCESSIBLE BRUSHES**  
Brushes accessible for easy servicing reducing down time
-  **ELECTRONIC BRUSH WEAR INDICATOR**  
Service light in the tool handle indicates when the brushes require changing.
-  **DUST EJECTION SYSTEM**  
Rejects the majority of dust sucked into a grinder leaving clean air only to pass over the motor, resulting in increased durability
-  **HOOK & LOOP**  
Hook & Loop bases allow easy attachment of sand paper
-  **PALM GRIP**  
Tool designed for single-handed operation
-  **CORDED/CORDLESS**  
Tool can be powered by mains electricity source, or by DeWALT batteries
-  **CARRYING CASE**  
Supplied with heavy duty carrying case
-  **LED**  
LED lights
-  **NO VOLT RELEASE**
-  **TOOL FREE**  
Tool free accessory change
-  **DRILL DRIVER**
-  **HAMMER DRILL DRIVER**
-  **1/2" ANVIL**
-  **6.35 ANVIL**
-  **6.35 HEX**

# CORDLESS XR RANGE EXPANSION



**10.8V**  
LITHIUM ION

**14.4V**  
LITHIUM ION

**18V**  
LITHIUM ION

**2.0**  
AH

**4.0**  
AH

**5**  
AH

**12V MAX XR Li-Ion Compact Drill Driver** **NEW** DCD710D2 / DCD710C2 / DCD710N\*



12V MAX XR Li-Ion compact drill driver featuring XR 2.0Ah Li-Ion battery technology  
 15 Position adjustable torque control for consistent screw driving into a variety of materials with different screw sizes  
 Ergonomic handle and rubber overmould to provide ultimate end user comfort  
 Parabolic switch profile allowing for greater control over speed of application

**Standard Equipment:** 2 x 2.0Ah XR Li-Ion battery packs, Multi voltage charger, Heavy duty kitbox

Battery Capacity	2.0 Ah / 1.3 Ah
Power Output	180 Watt
No Load Speed	0-400/1500 rpm
Chuck Capacity	1.5-10 mm
Max Torque	24 Nm
Max. Drilling Capacity [Wood]	19 mm
Max. Drilling Capacity [Metal]	10 mm
Weight	1.1 kg
Length x Height	185 x 195 mm

\*Available as bare unit, without batteries and charger as N version on request



**10.8V XR Li-Ion Compact Impact Driver** DCF815D2 / DCF815C2 / DCF815N\*



Compact, durable design delivers 107Nm of torque  
 Parabolic switch profile allowing for greater control over speed  
 6.35mm 'drop in' keyless hex driver allows for quick, one handed fitment  
 3 LED 'Halo' ring provides maximum illumination to work piece

**Standard Equipment:** 2 x 2.0Ah XR Li-Ion battery packs, Multi voltage charger, Heavy duty kit box

Battery Capacity	2.0 Ah / 1.3 Ah
Max Torque	107 Nm
Power Output	147 Watt
No Load Speed	0-2450 rpm
Impacts per Minute	3400 ipm
Max. Bolt Diameter	M10
Bit Holder	1/4" (6.35mm)
Weight	1.04 kg
Length x Height	158 x 195 mm

\*Available as bare unit, without batteries and charger as N version on request



**10.8V XR Li-Ion Compact Impact Wrench** DCF813D2 / C2



Compact body enables operation in confined spaces and repetitive use with minimal fatigue  
 3 LED 'Halo' ring provides maximum illumination to work piece  
 Parabolic switch profile allowing for greater control over speed  
 Ergonomic handle and rubber overmold reduces surface vibration and user fatigue

**Standard Equipment:** 2 x 2.0Ah XR Li-Ion battery packs, Multi voltage charger, Heavy duty kitbox

Battery Capacity	2.0 Ah / 1.3 Ah
Max. Torque	130 Nm
Power Output	147 Watt
No Load Speed	0-2450 rpm
Impacts per Minute	3400 ipm
Max. Bolt Diameter	M12
Bit Holder	3/8" Anvil
Weight	1.04 kg
Length x Height	158 x 195 mm



**10.8V XR Li-Ion Compact Screwdriver** DCF610D2 / DCF610C2



Powerful 10.8V Screwdriver for screwdriving & drilling applications  
 15 Position adjustable torque control for consistent screwdriving into a variety of materials with different screw sizes  
 6.35mm 'drop in' keyless hex driver allows for quick, one handed fitment  
 3 LED 'Halo' ring provides maximum illumination to work piece

**Standard Equipment:** 2 x 2.0Ah XR Li-Ion battery packs, Multi voltage charger, Heavy duty kit box

Battery Capacity	2.0 Ah / 1.3 Ah
Max Torque	8 Nm
Power Output	154 Watt
No Load Speed	0-1050 rpm
Bit Holder	6.35mm
Weight	0.96 kg
Length x Height	158 x 190 mm



**10.8V XR Li-Ion Compact Reciprocating Saw** DCS310D2 / DCS310N\*



Adjustable three position pivoting handle provides user with flexibility to work in confined spaces  
 Compact and lightweight design  
 Ergonomic handle and rubber overmould provide ultimate end user comfort  
 Lever action keyless blade clamp for quick and easy blade change

**Standard Equipment:** 2 x 2.0 Ah XR Li-Ion battery packs, Multi-voltage XR charger, Heavy duty kit box

Battery Capacity	2.0 Ah / 1.3 Ah
Power Output	140 Watt
No Load Stroke Rate	0-2,700 spm
Stroke Length	14 mm
Weight	1.4 kg
Length x Height	255 x 230 mm

\*Available as bare unit, without batteries and charger as N version on request



**10.8V XR Li-Ion Inspection Camera With 17mm Cable** DCT410D1 / DCT412D1\*



Removable wireless screen for ease of viewing when in tight areas  
 Photo and video capturing on Micro SD card to help with documentation  
 Hook and magnet accessories included to aid in retrieval  
 3x zoom capability for better visibility

**Standard Equipment:** 1 x 2.0Ah XR Li-Ion battery pack, 10.8V XR charger, Hook attachment, Magnet attachment, Micro SD Card, Camera cable, Heavy duty kitbox

Battery Capacity	2.0 Ah
Display Type	LCD
Resolution	320 x 480 dpi
Data Storage	2GB Micro SD Card
Cable Length	900 mm
Cable Diameter	17 mm
Waterproof cable	Yes
Screen Size	89 mm
Zoom	3 x
Weight	1.0 kg

\* DCT412D1 includes 17mm, 9mm, and 5.8mm camera cables  
 DCT410D1 includes 5.8mm only



**10.8V XR Li-Ion Infrared Thermometer** DCT414D1 / DCT414N\*



Non-contact temperature measurements (-29°C to 500°C) for ease of use over long distances to produce accurate readings  
 LED hot (red) & cold (blue) indicator for visual and/or audio alarm for quickly locating trouble areas  
 Micro SD card for recording max, min, and average temperatures  
 Adjustable emissivity for improved accuracy across a wide range of materials

**Standard Equipment:** 1 x 2.0Ah XR Li-Ion battery pack, 10.8V XR charger, Heavy duty kitbox

Battery Capacity	2.0 Ah
Display Type	LED
Screen Size	36 mm
Field of View	30cm x 2.5cm
Adjustable Emissivity	0.1 to 1.0
Operating Temperature	-10°C to 50°C °C
Temperature Range	-29°C to 500°C
Accuracy	± 1.5°C or ± 1.5%, whichever is greater <sup>1</sup>
Weight	0.5 kg

\*Available as bare unit, without batteries and charger as N version on request



**10.8V XR Li-Ion Imaging Thermometer** DCT416D1



Patented imaging thermometer technology measures and displays temperature patterns  
 Non-contact temperature measurement over a range of -10°C to 250°C  
 Visual and thermal images can be blended to easily locate and identify faults  
 Adjustable emissivity improves accuracy across a wide range of materials

**Standard Equipment:** 1 x 2.0Ah XR Li-Ion battery pack, 10.8V XR charger, Micro SD card, Heavy duty kitbox

Battery Capacity	2.0 Ah
Display Type	LCD
Resolution	225 dpi
Data Storage	2GB Micro SD Card
Screen Size	56 mm
Field of View	100cm x 2.5cm
Adjustable Emissivity	0.1 to 1.0
Operating Temperature	-5°C to 45°C °C
Temperature Range	-10°C to 250°C
Accuracy	Below 100°C ± 2°C, above 100°C ± 2% of reading <sup>1</sup>
Weight	0.56 kg



**10.8V XR Li-Ion Compact LED Flashlight** DCL510N



Flashlight has belt clip, magnetic mount or can be free standing, Flashlight head can rotate 180° horizontally and 180° vertically with ratchet lock  
 Compact, lightweight design with impact resistant housing  
 Battery and charger sold separately

Bulb Type	LED
Height x Length	123 x 52 mm
Weight (incl. battery)	350 g

**Standard Equipment:** Battery and charger sold separately





**14.4V XR Li-Ion Heavy Duty 3 Mode Dedicated Cordless Hammer**

**DCH143M2/ DCH143N\***



Ideal for drilling anchors and fixing holes into concrete, brick and masonry from 4mm to 20mm  
 Rotation stop mode for light chiselling in plaster, tiles and render and impact stop mode for rotary only drilling in wood and metal  
 4.0Ah 14.4 Volt Lithium Ion battery, delivers high performance, long life and maximum runtime  
 Best in class vibration, 6.6m/s<sup>2</sup> reduces user fatigue and maximises operating periods

**Standard Equipment:** 2 x 4.0Ah XR Li-Ion battery packs, Multi-voltage XR charger, Multi-position side handle, Heavy duty kit box

Battery Capacity	4.0 Ah
Power Output	300 Watt
No Load Speed	0-1100 rpm
Impact energy (EPTA 05/2009)	2.0 J
Blows per Minute	0-4250 bpm
Tool Holder	SDS-Plus
Max. Drilling Capacity [Wood]	20 mm
Max. Drilling Capacity [Metal]	10 mm
Max. Drilling Capacity [Concrete]	20 mm
Weight	3.0 kg
Length x Height	301 x 202 mm
Hand/Arm Vibration - Drilling	6.6 m/s <sup>2</sup>

\*Available as bare unit, without batteries and charger as N version on request



**14.4V XR Li-Ion Brushless Premium Hammer Drill Driver**

**DCD937M2/ DCD937P2\***



Latest generation 14.4V XR Li-Ion Brushless XRP hammer drill driver featuring XR 4.0Ah Li-Ion battery technology  
 Tough 3 speed all metal transmission for increased runtime and longer tool life  
 Electronic Clutch with 11 position adjustable torque control for optimised precision when screw driving  
 13 mm ratcheting keyless chuck with automatic spindle lock for fast bit changes

**Standard Equipment:** 2 x 4.0Ah XR Li-Ion battery packs, Multi-voltage XR charger, Belt hook, Magnetic bit holder, Multi position side handle, Heavy duty kitbox

Battery Capacity	4.0 Ah / 5.0 Ah
Max Torque	75 Nm
Power Output	520 Watt
No Load Speed	0-420/1250/1850 rpm
Beats per Minute	0-7140/21250/31450 bpm
Chuck Capacity	1.5-13 mm
Max. Drilling Capacity [Wood]	45 mm
Max. Drilling Capacity [Metal]	13 mm
Max. Drilling Capacity [Masonry]	14 mm
Weight	2.03 kg
Length x Height	213 x 205 mm

\*Available with 5.0 Ah batteries as a P2 version



**14.4V XR Li-Ion Brushless Premium Drill Driver**

**DCD932M2 / DCD932P2\***



Latest generation 14.4V XR Li-Ion Brushless XRP drill driver featuring XR 4.0Ah Li-Ion battery technology  
 Tough 3 speed all metal transmission for increased runtime and longer tool life  
 Electronic Clutch with 11 position adjustable torque control for optimised precision when screw driving  
 13 mm ratcheting keyless chuck with automatic spindle lock for fast bit changes

**Standard Equipment:** 2 x 4.0Ah XR Li-Ion battery packs, Multi-voltage XR charger, Belt hook, Magnetic bit holder, Multi position side handle, Heavy duty kit box

Battery Capacity	4.0 Ah/5.0Ah
Max. Torque	75 Nm
Power Output	520 Watt
No Load Speed	0-420/1250/1850 rpm
Max. Drilling Capacity [Wood]	45 mm
Max. Drilling Capacity [Metal]	13 mm
Chuck Capacity	1.5-13 mm
Weight	1.98 kg
Length x Height	200 x 205 mm

\*Available with 5.0 Ah batteries as a P2 version



**14.4V XR Li-Ion Brushless Compact Hammer Drill Driver**

**DCD737D2/ DCD737M2\* /DCD737P2\*\***



14.4V XR Li-Ion compact hammer drill driver featuring 2.0Ah XR Li-Ion battery technology  
 Brushless Motor Technology for excellent efficiency  
 Ultra compact, lightweight design allows use in confined spaces  
 Two speed all metal transmission for increased runtime and longer tool life

**Standard Equipment:** 2 x 2.0Ah XR Li-Ion battery packs, Multi-voltage XR charger, Belt hook, Magnetic bit holder, Heavy duty kitbox, Multi position side handle

Battery Capacity	2.0 Ah/4.0Ah/5.0Ah
Max Torque	57 Nm
Power Output	310 Watt
No Load Speed	0-550/2000 rpm
Beats per Minute	0-9500/33200 bpm
Chuck Capacity	1.5-13 mm
Max. Drilling Capacity [Wood]	38 mm
Max. Drilling Capacity [Metal]	13 mm
Max. Drilling Capacity [Masonry]	13 mm
Weight	1.58 kg
Length x Height	197 x 218 mm

\*Table reflects D2 version, M2 version shipped with 4.0Ah battery packs

\*\*Available with 5.0 Ah batteries as a P2 version



**14.4V XR Li-Ion Brushless Compact Drill Driver**

**DCD732D2/ DCD732M2\* /DCD732P2\*\***



14.4V XR Li-Ion compact drill driver featuring 2.0Ah XR Li-Ion battery technology  
 Brushless Motor Technology for excellent efficiency  
 Ultra compact, lightweight design allows use in confined spaces  
 Two speed all metal transmission for increased runtime and longer tool life

**Standard Equipment:** 2 x 2.0Ah XR Li-Ion battery packs, Multi-voltage XR charger, Belt Clip, Magnetic bit holder, Heavy duty kitbox

Battery Capacity	2.0 Ah/4.0Ah/5.0Ah
Power Output	310 Watt
No Load Speed	0-550/2000 rpm
Chuck Capacity	1.5-13 mm
Max Torque	57 Nm
Max. Drilling Capacity [Wood]	38 mm
Max. Drilling Capacity [Metal]	13 mm
Weight	1.52 kg
Length x Height	181 x 218 mm

\*Table reflects D2 version, M2 version shipped with 4.0Ah battery packs

\*\*Available with 5.0 Ah batteries as a P2 version



**14.4V XR Li-Ion Compact Drill Driver**

**NEW DCD734C2**



14.4V XR Li-Ion compact drill driver featuring XR 1.3Ah Li-Ion battery technology  
 13 mm single sleeve chuck and spindle lock for quick and easy bit change with one hand  
 Two speed settings, variable speed and reverse switch for maximum control  
 Intelligent trigger design allows for total control of application.

**Standard Equipment:** 2 x 1.3Ah XR Li-Ion battery packs, Multi-voltage XR charger, Heavy duty kitbox

Battery Capacity	1.3 Ah
Power Output	250 Watt
No Load Speed	0-400/1300 rpm
Chuck Capacity	1-13 mm
Max Torque	38 Nm
Max. Drilling Capacity [Wood]	30 mm
Max. Drilling Capacity [Metal]	10 mm
Weight	1.57 kg
Length x Height	215 x 191 mm



**14.4V XR Li-Ion Brushless 3 Speed Impact Driver**

**DCF825M2/ DCF825N\***



14.4V XR Li-Ion Brushless Impact Driver featuring XR 4.0Ah Li-Ion battery technology  
 Brushless motor provides up to 57% more runtime  
 3 Speeds for Maximum Control in all applications  
 Embedded Hex Design enables operation in confined spaces

**Standard Equipment:** 2 x 4.0Ah XR Li-Ion battery packs, Multi-voltage XR charger, Belt hook, Magnetic bit holder, Heavy duty kitbox

Battery Capacity	4.0 Ah
Max Torque	160 Nm
Power Output	235 Watt
No Load Speed	0-900/0-1850/0-2800 rpm
Impacts per Minute	0-1200/0-2300/0-3200 ipm
Max. Bolt Diameter	M12
Bit Holder	1/4" (6.35mm)
Weight	1.6 kg
Length x Height	132 x 240 mm

\*Available as bare unit, without batteries and charger as N version On Request



**14.4V XR Li-Ion Brushless Impact Driver**

**DCF836M2/ DCF836D2/ DCF836N\***



Latest generation 14.4V XR Li-Ion Brushless Impact Driver featuring XR 4.0Ah Li-Ion battery technology  
 Brushless motor provides improved runtime and durability  
 4.0Ah XR Li-Ion slide pack batteries offers user eXtreme Runtime  
 3 LED 'Halo' ring provides maximum illumination of work piece

**Standard Equipment:** 2 x 4.0Ah XR Li-Ion battery packs, Multi-voltage XR charger, Belt hook, Magnetic bit holder, Heavy duty kitbox

Battery Capacity	4.0 Ah /2.0 Ah
Max Torque	155 Nm
Power Output	250 Watt
No Load Speed	0 - 2800 rpm
Impacts per Minute	0 - 3200 ipm
Max. Bolt Diameter	M12
Bit Holder	1/4" (6.35mm)
Weight	1.5 kg
Length x Height	140 x 245 mm

\*Table reflects M2 version, D2 version shipped with 2.0Ah battery packs. Available as bare unit, without batteries and charger as N version On Request



**14.4V XR Li-Ion Compact Impact Wrench**

**DCF830M2/ DCF830N\***



Latest generation 14.4V XR Li-Ion Compact Impact Wrench featuring XR 4.0Ah Li-Ion battery technology  
 Ultra compact, light weight design allows for use in confined spaces  
 Bright white LED ring with delay feature for improved visibility and flashlight functionality  
 Intelligent trigger allowing total control over all applications

**Standard Equipment:** 2 x 4.0Ah XR Li-Ion battery packs, Multi-voltage XR charger, Belt hook, Heavy duty kit box

Battery Capacity	4.0 Ah
Max. Torque	185 Nm
Power Output	245 Watt
No Load Speed	0 - 2300 rpm
Impacts per Minute	0 - 2700 ipm
Max. Bolt Diameter	M16
Bit Holder	1/2" (12.7mm)
Weight	1.55 kg
Length x Height	147 x 240 mm

\*Available as bare unit, without batteries and charger as N version on request



**14.4V XR Li-Ion Brushless Drywall Screwdriver**

**NEW DCF621P2K/DCF621D2K/ DCF621D2 /DCF621N\***



14.4V XR Li-Ion BRUSHLESS Drywall Screwdriver for efficient fitting of drywall  
 Powerful BRUSHLESS motor drives screws efficiently and effectively offering maximum runtime and a compact tool  
 Quick release collated screw magazine accepts most collated screws to allow the user to fit boards more quickly  
 Easy collated screw magazine opening to allow for quick cleaning of drywall dust  
 Tool free depth control and fine depth control for simple but effective setting

Voltage	14.4V
Battery Capacity	2.0/5.0 Ah
No Load Speed	4400 rpm
Tool Holder	6.35 mm
Weight	1.91kg
Length x Height	380 x 253 mm

\*P versions supplied with 5.0Ah batteries, D versions supplied with 2.0Ah batteries. K versions supplied with collated mechanism "DCF6201" Available as bare unit, without batteries and charger as N version on request

**Standard Equipment:** 2 x 5.0Ah XR Li-Ion battery packs, Multi-voltage XR charger, Belt hook, Heavy duty kit box



**14.4V XR Li-Ion Right Angle Drill Driver**

**DCD720C1 / DCD720N\***



14.4V XR Li-Ion compact right angle drill driver featuring XR 1.5Ah Li-Ion battery technology  
 Two speed settings with reverse switch  
 Compact 10mm single sleeve keyless chuck with automatic spindle lock for quick and easy bit change  
 Ergonomic handle and rubber overmold to provide ultimate end user comfort

**Standard Equipment:** Multi-voltage XR charger, 1 x 1.5Ah XR Li-Ion battery pack, Belt hook, Magnetic bit holder, Heavy duty kitbox

Battery Capacity	1.5 Ah
Chuck Capacity	1.0-10 mm
Power Output	300 Watt
No Load Speed	0-650/2000 rpm
Max Torque	24 Nm
Max. Drilling Capacity [Wood]	28 mm
Max. Drilling Capacity [Metal]	10 mm
Weight	1.7 kg
Length x Height	325 x 102 mm

\*Available as bare unit, without batteries and charger as N version on request



**14.4V XR Li-Ion LED Pivot Light**

**DCI030\***



Compact, lightweight design with impact resistant housing  
 LED Bulb producing 110 Lumen output (10,000hr Life) with a 2 Zone light pattern  
 Flashlight head pivots more than 90 degrees vertically with ratchet lock  
 Flashlight includes an integrated hook for hanging & can be used free standing,

**Standard Equipment:** Battery and charger sold separately

Bulb Type	LED
Height x Length	240 x 115 mm
Weight (incl. battery)	0.6 g

\*Battery and charger sold separately



**XR Li-Ion DAB+/FM Compact Radio**

**NEW DCR020**



Compact and robust DAB(+)/FM jobsite radio  
 Accepts 10.8V, 14.4V and 18V XR Li-Ion batteries  
 Tech Box on-board storage protects portable audio devices  
 3.5mm auxiliary port and USB charging port inside Tech Box (USB charging AC only)  
 Integral roll cage provides impact resistance for maximum durability  
 1.8m power cord with wrap-around cord storage

Battery chemistry	XR Li-Ion
Voltage	10.8/14.4/18V
Radio Power Source	AC/DC
Radio Frequencies	DAB(+)/FM
Length	240mm
Height	245mm
Weight	2.8 kg
Length x Height	325 x 102 mm



**XR Li-Ion FM/AM Compact Radio**

**NEW DCR019**



Compact and robust FM/AM jobsite radio  
 Accepts 10.8V, 14.4V and 18V XR Li-Ion batteries  
 3.5mm auxiliary port allows for connection to portable audio devices  
 Integral roll cage provides impact resistance for maximum durability  
 1.8m power cord with wrap-around cord storage  
 Memory storage for 10 FM and 5 AM presets

Battery chemistry	XR Li-Ion
Voltage	10.8/14.4/18V
Radio Power Source	AC/DC
Radio Frequencies	FM/AM
Length	240mm
Height	245mm
Weight	2.8 kg
Length x Height	325 x 102 mm



**XR Li-Ion DAB Radio Charger**

**DCR017**



DAB+ and FM tuner receives digital and analogue signal  
 Multi-voltage XR charger with charge indicator LED light  
 Accepts 10.8V, 14.4V and 18V XR Li-Ion batteries  
 Two AC power outlets offer more versatility for jobsite power  
 Tech Box provides device protection and storage  
 3.5mm auxiliary port allows for connection to portable audio devices

**Standard Equipment:** No batteries included

Radio Power Source	AC/DC
Radio Frequencies	DAB(+)/FM
Charging Time	45-120 min
Length x Height	420 x 310 mm
Weight	5.9 kg



**XR Li-Ion FM/AM Radio**

**DCR016**



FM/AM tuner receives analogue signal  
 Accepts 10.8V, 14.4V and 18V XR Li-Ion batteries  
 3.5mm auxiliary port allows for connection to portable audio devices  
 Blow moulded roll cage with 6 impact resistance points for maximum durability

**Standard Equipment:** No batteries included

Radio Power Source	AC/DC
Radio Frequencies	FM/AM
Length x Height	420 x 310 mm
Weight	5.7 kg



**Bluetooth Adapter**

**NEW DCR002**



Transforms any device with a 3.5mm audio jack into a Bluetooth compatible device  
 Allows users to play music through their Smartphone or Bluetooth enabled audio player  
 Docks into clip which can be mounted on audio player  
 Fits into tech box device storage on DEWALT radios

**Standard Equipment:** USB to Micro USB Charging Cable, Mounting clip, Adhesive strips for mounting clip



**XR Bluetooth speaker**

**NEW DCR006**



Compact and robust Bluetooth Speaker  
 Plays streaming Bluetooth audio from any Bluetooth enabled device  
 2 x 50mm speakers provide high-fidelity audio  
 Integral roll cage provides impact resistance for maximum durability  
 3.5mm auxiliary port allows for connection to portable audio devices  
 Accepts 10.8V, 14.4V and 18V XR Li-Ion batteries



**USB Charging XR Battery Adapter**

**DCB090**



Transforms your XR battery into a portable charger  
Two USB outlets allow charging of wide range of small electronic devices  
Multi-voltage - compatible with 10.8V, 14.4V and 18V XR battery packs  
Bright and highly visible state of charge indicator

Charging current	1.5 (total) A
Height x Length	39 x 97 mm
Weight	0.094 kg



**XR Li-Ion AC/DC Wet & Dry Vacuum**

**NEW DCV582**



Operates on 14.4V/18V DEWALT XR battery packs & mains supply  
High efficiency washable HEPA filter traps 99.97% of dust as fine as 0.3 Microns  
On-board hose, cord and accessory storage provides convenient transport and storage  
Vacuums Wet or Dry without the need to change the filter

**Standard Equipment:** 2 metre hose, Crevice tool, Wide nozzle, Batteries not included

Battery chemistry	XR Li-Ion
Voltage	14.4/18V
Power Input	300W
Max. Airflow	15.9 L/sec
Tank volume	7.5L
Power Source	AC/DC
Protection Class	IPX4
Hose Nozzle Outside Diameter	32mm
Blower	Yes
Length	430mm
Width	305mm
Height	330mm
Weight	4.5 kg



**XR**  
**LITHIUM ION**



**18V XR Li-Ion Brushless 3 Mode Dedicated Hammer**

**NEW** DCH273P2 / DCH273N\* / DCH273P2T



Category-leading high speed drilling performance at more than 90 holes (10mm Ø x 80mm) per charge  
 Rotation stop mode for light chiselling in plaster, tiles and render and impact stop mode for rotary only drilling in wood and metal  
 Brushless motor with high capacity XR 5.0Ah 18V Lithium-ion battery platform for extreme runtime and reduced maintenance  
 Electronic clutch for consistently-high torque and improved durability  
 Perform & Protect: best-in-class vibration at 6.6m/s<sup>2</sup>, minimising user fatigue  
 Bright white LED with delay feature improves visibility

**Standard Equipment:** 2 x 5.0Ah XR Li-Ion battery packs with state of charge indicator, Multi-voltage XR charger, Multi-position side handle, Heavy duty kitbox

Battery chemistry	XR Li-Ion
Voltage	18V
Battery Capacity	5.0Ah
Power Output	400W
No Load Speed	0-1200rpm
Impact energy (EPTA 05/2009)	2.1J
Blows per Minute	0-4500bpm
Tool Holder	SDS-Plus
Max. Drilling Capacity [Wood]	26mm
Max. Drilling Capacity [Metal]	13mm
Max. Drilling Capacity [Concrete]	24mm
Weight	3.1 kg
Length	301
Height	202
Hand/Arm Vibration - Drilling	6.6 m/s <sup>2</sup>

\*Available as bare unit, without batteries and charger as N version on request  
 Available in a TSTAK II kit box as DCH273P2T



**18V XR Li-Ion Brushless 3 Mode Quick Change Chuck Dedicated Hammer**

**NEW** DCH274P2 / DCH274N\* / DCH274P2T



Ideal for drilling anchors and fixing holes into concrete, brick and masonry from 4mm to 24mm  
 Rotation stop mode for light chiselling in plaster, tiles and render and impact stop mode for rotary only drilling in wood and metal  
 5.0Ah 18 Volt Lithium Ion battery, delivers high performance, long life and maximum runtime  
 Quick release SDS-Plus toolholder and keyless chuck supplied for easy switching between hammer / rotary hammer and rotary only applications  
**Standard Equipment:** 2 x 5.0Ah XR Li-Ion battery packs, Multi-voltage XR charger, Multi-position side handle, Quick release SDS-Plus toolholder, Quick release 13mm 3 jaw chuck, Heavy duty kitbox

Battery Capacity	4.0 Ah
Power Output	400 Watt
No Load Speed	0-1200 rpm
Impact energy (EPTA 05/2009)	2.1 J
Blows per Minute	0-4500 bpm
Tool Holder	SDS-Plus
Max. Drilling Capacity [Wood]	26 mm
Max. Drilling Capacity [Metal]	13 mm
Max. Drilling Capacity [Concrete]	24 mm
Weight	3.2 kg
Length x Height	328 x 202 mm
Hand/Arm Vibration - Drilling	6.6 m/s <sup>2</sup>

\*Available as bare unit, without batteries and charger as N version on request



**18V XR Li-Ion Brushless 3 Mode Dedicated Hammer with Integrated Dust Extraction System**

**NEW** DCH275P2



Includes D25303DH Integrated Dust Extraction System  
 Rotation stop mode for light chiselling in plaster, tiles and render and impact stop mode for rotary only drilling in wood and metal  
 Quick release SDS-Plus toolholder and keyless chuck supplied for easy switching between hammer / rotary hammer and rotary only applications  
 Ideal for drilling anchors and fixing holes into concrete, brick and masonry from 4mm to 24mm  
 Brushless motor with high capacity XR 5.0Ah 18V Lithium-ion battery platform for extreme runtime and reduced maintenance  
 Electronic clutch for consistently-high torque and improved durability  
**Standard Equipment:** 2 x 5.0Ah XR Li-Ion battery packs, Multi-voltage XR charger, Multi-position side handle, Quick release SDS-Plus toolholder, Quick release 13mm 3 jaw chuck, Heavy duty kitbox

Battery Capacity	5.0 Ah
Power Output	400 Watt
No Load Speed	0-1100 rpm
Impact energy (EPTA 05/2009)	2.1 J
Blows per Minute	0-4600 bpm
Tool Holder	SDS-Plus
Max. Drilling Capacity [Wood]	26 mm
Max. Drilling Capacity [Metal]	13 mm
Max. Drilling Capacity [Concrete]	24 mm
Weight	3.3 kg
Length	328 mm
Height	202 mm
Hand/Arm Vibration - Drilling	6.6 m/s <sup>2</sup>



**18V Cordless Dust Extraction System**

**NEW** D25303DH



Ideal for dust free drilling up to 16 mm in diameter  
 Powered by an independent motor maintaining maximum hammer performance with no decrease in durability  
 High quality washable HEPA filter capable of achieving 99.5% efficiency with dust particles as small as 0.3 microns  
 Quick release for easy tool free assembly  
 Extremely tough and versatile to meet the needs of the most demanding applications

**Standard Equipment:** Cordless dust extraction system, Side handle with dust extraction adaptation, Telescope, extraction head and depth rod, Connector pipe, Large kit box

Fits	DCH273 & DCH274, DCH253 & DCH254 (Type 2 Only)
Collar Diameter	0 mm
Max. Drill Bit Diameter	16 mm
Max. Drill Bit Length	210 mm
Max. Drilling Depth	150 mm
Hose Length	215 mm
Hose Diameter	32 mm
Weight	1.8 kg
Length x Height	502 x 360 mm



**18V XR Li-Ion Brushless Premium Hammer Drill Driver**

**NEW** DCD995M2 / DCD995P2\*



Latest generation 18V XR Brushless Li-Ion XRP hammer drill driver featuring XR 4.0Ah Li-Ion battery technology  
Tough 3 speed all metal transmission for increased runtime and longer tool life  
Electronic Clutch with 11 position adjustable torque control for optimised precision when screw driving  
13 mm ratcheting keyless chuck with automatic spindle lock for fast bit changes

**Standard Equipment:** 2 x 4.0Ah XR Li-Ion battery packs with state of charge indicator, Multi-voltage XR charger, Belt hook, Magnetic bit holder, Multi position side handle, Heavy duty kitbox

Battery Capacity	4.0 Ah/5.0 Ah*
Max Torque	80 Nm
Power Output	650 Watt
No Load Speed	0-450/1300/2000 rpm
Beats per Minute	0-7650/22100/34000 bpm
Chuck Capacity	1.5-13 mm
Max. Drilling Capacity [Wood]	50 mm
Max. Drilling Capacity [Metal]	13 mm
Max. Drilling Capacity [Masonry]	16 mm
Weight	2.13 kg
Length x Height	213 x 205 mm

\*Available with 5.0 Ah batteries as a P2 version



**18V XR Li-Ion Brushless Premium Drill Driver**

**NEW** DCD990M2 / DCD990P2\*



Latest generation 18V XR Li-Ion Brushless XRP drill driver featuring XR 4.0Ah Li-Ion battery technology  
Tough 3 speed all metal transmission for increased runtime and longer tool life  
Electronic Clutch with 11 position adjustable torque control for optimised precision when screw driving  
13 mm ratcheting keyless chuck with automatic spindle lock for fast bit changes

**Standard Equipment:** 2 x 4.0Ah XR Li-Ion battery packs with state of charge indicator, Multi-voltage XR charger, Belt hook, Magnetic bit holder, Multi position side handle, Heavy duty kitbox

Battery Capacity	4.0 Ah/5.0 Ah*
Max. Torque	80 Nm
Power Output	650 Watt
No Load Speed	0-450/1300/2000 rpm
Max. Drilling Capacity [Wood]	50 mm
Max. Drilling Capacity [Metal]	13 mm
Chuck Capacity	1.5-13 mm
Weight	2.08 kg
Length x Height	200 x 205 mm

\*Available with 5.0 Ah batteries as a P2 version



**18V XR Li-Ion Brushless Compact Hammer Drill Driver**

**NEW** DCD795D2 / DCD795M2\* / DCD795P2\*\*



18V XR Li-Ion compact hammer drill driver featuring 2.0Ah XR Li-Ion battery technology  
Brushless Motor Technology for excellent efficiency  
Ultra compact, lightweight design allows use in confined spaces  
Two speed all metal transmission for increased runtime and longer tool life

**Standard Equipment:** 2 x 2.0Ah XR Li-Ion battery packs with state of charge indicator, Multi-voltage XR charger, Belt hook, Magnetic bit holder, Heavy duty kitbox, Multi position side handle

Battery Capacity	2.0 Ah/4.0 Ah*/5.0 Ah**
Max Torque	60 Nm
Power Output	360 Watt
No Load Speed	0-600/2000 rpm
Beats per Minute	0-10200/34000 bpm
Chuck Capacity	1.5-13 mm
Max. Drilling Capacity [Wood]	38 mm
Max. Drilling Capacity [Metal]	13 mm
Max. Drilling Capacity [Masonry]	13 mm
Weight	1.62 kg
Length x Height	197 x 218 mm

\*Table reflects D2 version, M2 version shipped with 4.0Ah battery packs  
\*\*Available with 5.0 Ah batteries as a P2 version



**18 XR Li-Ion Brushless Compact Drill Driver**

**NEW** DCD790D2 / DCD790M2\* / DCD790P2\*\*



18V XR Li-Ion compact drill driver featuring 2.0Ah XR Li-Ion battery technology  
Brushless Motor Technology for excellent efficiency  
Ultra compact, lightweight design allows use in confined spaces  
Two speed all metal transmission for increased runtime and longer tool life

**Standard Equipment:** 2 x 2.0Ah XR Li-Ion battery packs with state of charge indicator, Multi-voltage XR charger, Belt hook, Magnetic bit holder, Heavy duty kitbox

Battery Capacity	2.0 Ah/4.0 Ah*/5.0 Ah**
Power Output	360 Watt
No Load Speed	0-600/2000 rpm
Chuck Capacity	1.5-13 mm
Max Torque	60 Nm
Max. Drilling Capacity [Wood]	38 mm
Max. Drilling Capacity [Metal]	13 mm
Weight	1.62 kg
Length x Height	181 x 218 mm

\*Table reflects D2 version, M2 version shipped with 4.0Ah battery packs  
\*\*Available with 5.0 Ah batteries as a P2 version



**18V XR Li-Ion Compact Hammer Drill Driver**

**DCD776C2**



18V XR Li-Ion compact drill driver featuring XR 1.3Ah Li-Ion battery technology  
13mm single sleeve chuck and spindle lock for quick and easy bit change with one hand  
Two speed settings, variable speed and reverse switch for maximum control  
Intelligent trigger design allows for total control of application  
15 Position adjustable torque control for consistent screw driving into a variety of materials with different screw sizes

**Standard Equipment:** 2 x 1.3Ah XR Li-Ion battery packs, Multi-voltage XR charger, Heavy duty kitbox

Battery Capacity	1.3 Ah
Max Torque (Hard)	42 Nm
Max Torque (Soft)	24 Nm
Power Output	300 Watt
No Load Speed	0-450/1500 rpm
Beats per Minute	0-7650/25500 bpm
Chuck Capacity	1.5-13 mm
Max. Drilling Capacity [Wood]	30 mm
Max. Drilling Capacity [Metal]	13 mm
Max. Drilling Capacity [Masonry]	13 mm
Weight	1.72 kg
Length	228 mm
Height	191 mm



**18V XR Li-Ion Drill Driver**

**DCD771C2**



NEW 18V XR Li-Ion compact drill driver featuring XR 1.3Ah Li-Ion battery technology  
13 mm single sleeve chuck and spindle lock for quick and easy bit change with one hand  
Two speed settings, variable speed and reverse switch for maximum control  
Intelligent trigger design allows for total control of application  
16 Position adjustable torque control for consistent screw driving into a variety of materials with different screw sizes

**Standard Equipment:** 2 x 1.3Ah XR Li-Ion battery packs, Multi-voltage XR charger, Heavy duty kitbox

Battery Capacity	1.3 Ah
Max Torque (Hard)	42 Nm
Max Torque (Soft)	24 Nm
Power Output	300 Watts
No Load Speed	0-450/1500 rpm
Chuck Capacity	1.5-13 mm
Max. Drilling Capacity [Wood]	30 mm
Max. Drilling Capacity [Metal]	13 mm
Weight	1.65 kg
Length	219 mm
Height	191 mm



**18V XR Li-Ion Brushless 3 Speed Impact Driver**

**DCF895M2 / DCF895N\***



18V XR Li-Ion Brushless Impact Driver featuring XR 4.0Ah Li-Ion battery technology  
Brushless motor provides up to 57% more runtime  
3 Speeds for Maximum Control in all applications  
Embedded Hex Design enables operation in confined spaces

**Standard Equipment:** 2 x 4.0Ah XR Li-Ion battery packs with state of charge indicator, Multi-voltage XR charger, Belt hook, Magnetic bit holder, Heavy duty kitbox

Battery Capacity	4.0 Ah
Max Torque	170 Nm
Power Output	290 Watt
No Load Speed	0-950/0-1900/0-2850 rpm
Impacts per Minute	0-1300/0-2400/0-3300 ipm
Max. Bolt Diameter	M12
Bit Holder	1/4" (6.35mm)
Weight	1.7 kg
Length x Height	132 x 240 mm

\*Available as bare unit, without batteries and charger as N version on request



**18V XR Li-Ion Brushless Impact Driver**

**DCF886M2 / DCF886D2 / DCF886N\***



Latest generation 18V XR Li-Ion Brushless Impact Driver featuring XR 4.0Ah Li-Ion battery technology  
Brushless motor provides improved runtime and durability  
4.0Ah XR Li-Ion slide pack batteries with state of charge indication offers user peace of mind  
3 LED 'Halo' ring provides maximum illumination of work piece

**Standard Equipment:** 2 x 4.0Ah XR Li-Ion battery packs with state of charge indicator, Multi-voltage XR charger, Belt hook, Magnetic bit holder, Heavy duty kitbox

Battery Capacity	4.0 Ah
Max Torque	165 Nm
Power Output	280 Watt
No Load Speed	0 - 2800 rpm
Impacts per Minute	0 - 3200 ipm
Max. Bolt Diameter	M12
Bit Holder	1/4" (6.35mm)
Weight	1.57 kg
Length x Height	140 x 245 mm

\*Table reflects M2 version, D2 version shipped with 2.0Ah battery packs. Available as bare unit, without batteries and charger as N version on request



**18V XR Li-Ion Compact Impact Wrench**

**DCF880M2 / DCF880N\***



Latest generation 18V XR Li-Ion Compact Impact Wrench featuring XR 4.0Ah Li-Ion battery technology  
Ultra compact, light weight design allows for use in confined spaces  
Bright white LED ring with delay feature for improved visibility and flashlight functionality  
Intelligent trigger allowing total control over all applications

**Standard Equipment:** 2 x 4.0Ah XR Li-Ion battery packs with state of charge indicator, Multi-voltage XR charger, Belt hook, Heavy duty kit box

Battery Capacity	4.0 Ah
Max. Torque	203 Nm
Power Output	250 Watt
No Load Speed	0 - 2300 rpm
Impacts per Minute	0 - 2700 ipm
Max. Bolt Diameter	M16
Bit Holder	1/2" (12.7mm)
Weight	1.62 kg
Length x Height	147 x 240 mm

\*Available as bare unit, without batteries and charger as N version on request



**18V XR Li-Ion High Torque Wrench**

**NEW** DCF899P2



Latest generation 18V XR Li-Ion High Torque Wrench featuring XR 5.0Ah Li-Ion battery technology  
 Powerful fan cooled motor delivers up to 950Nm of torque and up to 2400 impacts per minute for heavy duty fastening applications  
 Up to 1625Nm of "breakaway" torque ensures removal of the tightest bolts  
 3 Speed and torque settings gives you the control to best suit your application  
 1/2" (13mm) square drive with detent pin allows for more efficient torque delivery and excellent socket retention  
 Bright white LED with delay feature for improved visibility and flashlight functionality  
 Comfortable rubber XR grip and switch for greater application comfort and maximum control  
 Sold with TSTAK kitbox for easy system transportation and storage when used with other TSTAK kitboxes

Battery Capacity	5.0 Ah
Max. Torque	950 Nm
Power Output	449 Watt
No Load Speed	0 - 1500 rpm
Impacts per Minute	0 - 2300 ipm
Max. Bolt Diameter	M20
Bit Holder	1/2"
Weight	3.4 kg
Length x Height	264 x 260 mm

**Standard Equipment:** 2 x 5.0Ah XR Li-Ion battery packs with state of charge indicator, Multi-voltage XR charger, TSTAK kitbox

\*Available with hog ring socket retention as H series. Available as bare unit, without batteries and charger as N version on request

**18V Li-Ion BRUSHLESS Collated Drywall Screwdriver**

DCF620P2K/DCF620D2K/DCF620D2/DCF20N\*



18V XR Li-Ion BRUSHLESS Drywall Screwdriver for efficient fitting of drywall  
 Powerful BRUSHLESS motor drives screws efficiently and effectively offering maximum runtime and a compact tool  
 Quick release collated screw magazine accepts most collated screws to allow the user to fit boards more quickly  
 Easy collated screw magazine opening to allow for quick cleaning of drywall dust  
 Tool free depth control and fine depth control for simple but effective setting

Voltage	18 V
Battery Capacity	2.0/5.0 Ah
No Load Speed	4400 rpm
Tool Holder	6.35 mm
Weight	2 kg
Length x Height	380 x 253 mm

**Standard Equipment:** 2 x 18V 5.0Ah XR Li-Ion battery packs, Multi-voltage XR charger, DCF6201 collated screw magazine, TSTAK 2 Kitbox

\*P versions supplied with 5.0Ah batteries, D versions supplied with 2.0Ah batteries. K versions supplied with collated mechanism "DCF6201" Available as bare unit, without batteries and charger as N version on request

**18V XR Li-Ion Drywall Cut-Out Tool**

DCS551N



Tool-free bit change for fast and easy bit changing  
 26,000 rpm for fast cutting speed  
 Adjustable depth stop for improved control when plunge cutting sheet material  
 Dust sealed switch provides durability and long switch life  
 Supplied with 3.2mm (1/8") and 6.4mm (1/4") collets, compatible with most rotary tool accessories  
 LED illuminates cutting area for improved visibility of cut

Battery Capacity	4.0 Ah/5.0 Ah
No Load Speed	26000 rpm
Max Watts Out	550 Watt
Height	250 mm
Weight	1.1kg

**Standard Equipment:** Adjustable depth stop, 3.2mm (1/4") collet, 6.4mm (1/8") collet, General purpose bit, Drywall cutting bit, Battery and charger sold separately

**18V XR Li-Ion Compact Reciprocating Saw**

DCS387M2 / DCS387N\*



Compact saw allows better access to hard to reach cuts  
 Improved balance and ease of handling due to central motor position  
 Four position blade clamp allows for flush cutting and improved versatility  
 Lever action keyless blade clamp for tool-free blade change  
 LED for improved visibility of cutting

Battery chemistry	XR Li-Ion
Voltage	18 V
Battery Capacity	4.0 Ah
Power Output	610 watt
No Load Stroke Rate	0-2900 spm
Stroke Length	28.6mm
Weight	2.3kg
Length	363mm
Height	203mm

**Standard Equipment:** Multi-voltage charger, 2 x 4.0Ah XR Li-Ion battery packs with state of charge indicator, Heavy-Duty TSTAK II Kitbox

\*Available as bare unit, without batteries and charger as N version, Only on Request

**18V XR Li-Ion Reciprocating Saw**

DCS380M2/ DCS380N\*



Powerful & highly efficient PMS8 DeWALT fan cooled motor with replaceable brushes, delivers fast cutting action up to 2,950 strokes per minute and 28.6 mm stroke length maximising user productivity  
 Intelligent variable speed trigger, lock-off switch and electronic motor brake for quick controlled cuts and enhanced work safety  
 Lever-action keyless blade clamp for quick and easy blade changes  
 Pivoting adjustable shoe with open top for high stability and blade visibility during a cut

Battery Capacity	4.0 Ah
Power Output	560 Watt
No Load Stroke Rate	0-2950 spm
Stroke Length	28.6 mm
Weight	3.3 kg
Length x Height	425 x 195 mm

**Standard Equipment:** Multi-voltage charger, 2 x 4.0Ah XR Li-Ion battery packs with state of charge indicator, Heavy duty kit box

\*Available as bare unit, without batteries and charger as N version on request

**18V XR Li-Ion Compact Bandsaw**

DCS371N



Ideally suited for cutting lengths of metal, including threaded rod, unistrut and steel pipework  
 63mm cut capacity cuts up to DN 50 or 2" SCH 40 pipe  
 Smooth cuts leaves surfaces burr-free  
 Creates little or no sparks when cutting metal  
 Well balanced and easy to handle in all orientations including overhead

Battery Capacity	4.0 Ah
Max. Torque	540 Nm
Power Output	449 Watt
No Load Speed	0 - 1500 rpm
Impacts per Minute	0 - 2300 ipm
Max. Bolt Diameter	M20
Bit Holder	1/2"
Weight	3.4 kg
Length x Height	264 x 260 mm

**Standard Equipment:** 14/18 TPI variable pitch bi-metal blade, Hang hook, Battery and charger sold separately

**18V XR Li-Ion Jigsaw**

DCS331M2/ DCS331N\*



Powerful & highly efficient DEWALT PM47 fan-cooled motor with replaceable brushes, delivers fast cutting action up to 3000 strokes per minute maximising user productivity  
 Intelligent variable speed trigger & lock-off switch for quick controlled cuts and enhanced work safety  
 Tool-free adjustable shoe with anti-scratch cover bevels 45 degrees in both directions  
 Quick and easy patented keyless blade change system, accepts T-shank blades

Battery Capacity	4.0 Ah
Power Output	400 Watt
No Load Stroke Rate	0-3000 spm
Stroke Length	26 mm
Bevel Capacity	45 °
Max. Depth of Cut [Wood]	135 mm
Max. Depth of Cut [Metal]	10 mm
Weight	3.1 kg
Length x Height	305 x 215 mm

**Standard Equipment:** Anti-scratch shoe cover, Dust port, Multi-voltage charger, 2 x 4.0Ah XR Li-Ion battery packs with state of charge indicator, Heavy duty kit box

\*Available as bare unit, without batteries and charger as N version on request

**18V XR Li-Ion Circular Saw**

DCS391M2/ DCS391N\*



Ergonomic handle set with rubber overmould to optimise comfort  
 Extremely durable tool design, including a cast magnesium base for intelligent variable speed trigger  
 Keyless bevel angle and depth of cut adjustment with easy to read scale  
 Lock off switch and electronic motor brake for additional control and work safety  
 Ultra thin kerf 165 mm, 24 tooth carbide-tipped blade allows for efficient run time and fast, smooth cut finish at maximum 55 mm depth of cut

Battery Capacity	4.0 Ah
Blade Diameter	165 x 20 mm
Power Output	460 Watt
No Load Speed	3700 rpm
Bevel Capacity	50 °
Weight	3.8 kg
Length x Height	360 x 240 mm

**Standard Equipment:** 165 mm carbide blade, Hex Key, Dust Port, Multi-voltage charger, 2 x 4.0Ah XR Li-Ion battery packs with state of charge indicator, Heavy duty kit box

\*Available as bare unit, without batteries and charger as N version on request

**18V XR Li-Ion Metal Cutting Circular Saw**

DCS373M2/ DCS373N\*



Powerful & highly efficient PMS8 DeWALT fan-cooled motor with replaceable brushes delivers up to 3700 rotation per minute for fast cutting action  
 Ergonomic handle set with rubber overmould to optimise end user comfort  
 Extremely durable tool design with steel shoe to withstand rough job site conditions  
 Intelligent variable speed trigger

Battery Capacity	4.0 Ah
Blade Diameter	140 x 20 mm
Power Output	460 Watt
No Load Speed	3700 rpm
Weight	3.8 kg
Length x Height	350 x 210 mm

**Standard Equipment:** 140 mm tungsten carbide blade, Hex key, Multi-voltage charger, 2 x 4.0Ah XR Li-Ion battery packs with state of charge indicator, Heavy duty kit box

\*Available as bare unit, without batteries and charger as N version on request

**18V XR Li-Ion Grease Gun**

**NEW** DCG571M1



Performs routine lubrication up to twice as fast as a manual grease gun  
 690 bar (10,000 PSI) output pressure with a flow rate of 147g per minute  
 Delivers high pressure to clear clogged fittings  
 1m hose for hard-to-reach fittings  
 Purge valve allows user to bleed excess air that can become trapped in pump valves, affecting the pressure and speed of application  
 Innovative pump filter screen on the unit helps to keep dirt from passing through the pump mechanism  
 LED light helps to illuminate fittings that are difficult to locate  
 Includes shoulder strap for carrying the unit during applications that require climbing or manoeuvring around work site

Battery chemistry	XR Li-Ion
Voltage	18 V
Battery Capacity	4.0 Ah
Output Pressure	690 bar
Output Pressure	10,000 PSI
Feed Rate	147 g/min
Grease Type	Up to NLGI #2
Grease Capacity (Bulk)	453g
Grease Capacity (Cartridge)	400g
Hose Length	1000mm
Height	230mm

**Standard Equipment:** 1 x 4.0Ah XR Li-Ion battery pack with state of charge indicator, XR Multi-Voltage Charger, Shoulder strap, Heavy-duty kitbox

**18V XR Li-Ion Brushless Framing Nailer** **DCN690M2/ DCN690N/ DCN691\***



18V XR Li-Ion Framing Nailer featuring BRUSHLESS motor technology and XR 4.0Ah battery packs  
BRUSHLESS motor technology offers the power to fire a 90mm Ring Shank nail in Soft Wood and 63mm into Hard Woods  
The sequential operating mode allows for precision placement and the bump operating mode provides the user with production speed  
High capacity 4.0Ah XR battery packs offer eXtreme Runtime and versatility to share power with your other 18V XR power tools

**Standard Equipment:** 2 x 4.0Ah XR Li-Ion battery packs with state of charge indicator, Multi-voltage XR charger, Reversible belt hook, Non-mar tip, Heavy duty carrying case

Battery Capacity	4.0 Ah
Nail Diameter	2.8 - 3.3 mm
Magazine angle	30 - 34 °
Magazine loading	Rear - load
Nail Length	50 - 90 mm
Magazine capacity	Up to 55 Nails
Firing mode	Bump & Sequential
Length x Height	345 x 338 mm
Weight	4.1 kg
Nailer Operating Mode	Selective
Impact energy	105 J
Temperature Range	-15 to 50°C
Fault indicator	Yes

\*Available as bare unit, without batteries and charger as N version. Available with sequential operating mode only as DCN691



**18V XR Li-Ion 2 Speed Brushless Framing Nailer** **NEW DCN692P2/DCN692N\***



18V XR Li-Ion Two Speed Framing Nailer featuring BRUSHLESS motor technology and XR 5.0Ah battery packs  
Two speeds - or power levels - to optimise the nailer for firing all lengths of nails  
Benefit from longer runtime, quicker readiness to fire, less recoil and more durability when firing short nails  
BRUSHLESS motor technology offers the power to fire a 90mm Ring Shank nail in Soft Wood and 63mm into Hard Woods  
The sequential operating mode allows for precision placement and the bump operating mode provides the user with production speed

**Standard Equipment:** 2 x 5.0Ah XR Li-Ion battery packs with state of charge indicator, Multi-voltage XR charger, Reversible belt hook, Non-mar tip, Heavy duty carrying case

Battery Capacity	5.0 Ah
Nail Diameter	2.8 - 3.3 mm
Magazine angle	30 - 34 °
Magazine loading	Rear - load
Nail Length	50 - 90 mm
Magazine capacity	Up to 55 Nails
Firing mode	Bump & Sequential
Length x Height	345 x 338 mm
Weight	4.1 kg
Nailer Operating Mode	Selective
Impact energy	105 J
Temperature Range	-15 to 50°C
Fault indicator	Yes

\*Available as bare unit, without batteries and charger as N version on request



**18V XR Li-Ion Metal Connector Nailer** **NEW DCN693P2/DCN693N\*/DCN694P2/DCN694N\***



18V XR Li-Ion Two Speed Metal Connector Nailer featuring BRUSHLESS motor technology and XR 5.0Ah battery packs  
Accurate hole alignment probe finds the hole quickly and positions the tool securely to ensure you hit the hole every time  
Two speeds - or power levels - to optimise the nailer for firing all lengths of metal connector nails between 40 and 60mm (DCN693)  
Benefit from longer runtime, quicker readiness to fire, less recoil and more durability when firing short nails  
The sequential operating mode allows for precision placement, whilst the rapidcycle sequential operating mode provides the user with production speed and sequential safety

**Standard Equipment:** 2 x 5.0Ah XR Li-Ion battery packs with state of charge indicator, Multi-voltage XR charger, Reversible belt hook, Heavy duty carrying case

Battery Capacity	5.0 Ah
Nail Diameter	3.4 - 4 mm
Magazine angle	30 - 34 °
Magazine loading	Rear - load
Nail Length	40-60 mm
Magazine capacity	TBC
Firing mode	Rapidcycle & Sequential
Length x Height	345 x 338 mm
Weight	4.1 kg
Nailer Operating Mode	Selective
Impact energy	TBC
Temperature Range	-15 to 50°C
Fault indicator	Yes

\*Available as bare unit, without batteries and charger as N version on request



**18V XR Li-Ion Grinder** **DCG412M2/ DCG412N\***



Steel cut spiral bevel gears provide highest level of durability and low vibration, increasing user productivity  
Low profile jam pot gear case improves gear durability and ergonomics  
Intelligent trigger & lock-off switch for enhanced work safety & control  
Keyless guard for enhanced application versatility  
Two position side handle offers greater comfort and control  
Quick change wheel release allows quick and easy wheel removal

**Standard Equipment:** 2 position side handle, Keyless protective guard, Blade Wrench, Multi-voltage charger, 2 x 4.0Ah XR Li-Ion battery packs with state of charge indicator, Heavy duty kit box

Battery Capacity	4.0 Ah
Max. Disc Diameter	125 mm
Power Output	405 Watt
No Load Speed	7000 rpm
Spindle Thread	M14
Weight	2.9 kg
Length x Height	400 x 125 mm

\*Available as bare unit, without batteries and charger as N version on request



**18V XR Li-Ion Right Angle Drill Driver** **DCD740C1/ DCD740N\***



Latest generation 18V XR Li-Ion compact right angle drill driver featuring NEW XR 1.5Ah Li-Ion battery technology  
Two speed settings with reverse switch  
Compact 10mm single sleeve keyless chuck with automatic spindle lock for quick and easy bit change  
Ergonomic handle and rubber over mould to provide ultimate end user comfort

**Standard Equipment:** 1 x 1.5Ah XR Li-Ion battery packs, Multi-voltage XR charger, Belt hook, Magnetic bit holder, Heavy duty kitbox

Battery Capacity	1.5 Ah
Chuck Capacity	1.0-10 mm
Power Output	360 Watt
No Load Speed	0-650/2000 rpm
Max Torque	33 Nm
Max. Drilling Capacity [Wood]	28 mm
Max. Drilling Capacity [Metal]	10 mm
Weight	1.75 kg
Length x Height	325 x 102 mm

\*Available as bare unit, without batteries and charger as N version on request



**18V XR Li-Ion Brushless Oscillating Multi-Tool** **DCS355D2/ DCS355M2/ DCS355N\***



DeWALT Brushless Motor delivers up to 57% more run time over brushed  
QUICK-CHANGE Accessory System allows blades and attachments to be changed quickly without the use of tools  
DUAL-GRIP Variable Speed Trigger provides the ultimate speed and application control  
Bright LED light illuminates dark work surfaces for accurate cutting

**Standard Equipment:** 2 x 2Ah XR Li-Ion battery packs with state of charge indicator, Multi-Voltage XR Charger, 1 x TStak Kitbox, 1 x 31 x 43mm Fast Cut Wood Blade, 1 x 31 x 43mm Wood with Nails Blade, 1 x Rigid Scraper Blade, 1 x Semi Circle Blade, 1 x Carbide Grout Removal Blade, 1 x Wood Detail Blade, 1 x Sanding Pad, 25 Sheets Assorted Sanding Paper, 1 x Dust Extraction Adaptor, 1 x Depth Control Straight Cutting Guide, 1 x Universal Blade Adaptor

Battery Capacity	2.0/4.0 Ah
Power Output	300 Watt
Speed	0-20,000 min/1
Switch type	Variable Dual Grip
Tool free Accessory Fitment	Yes
Length	310 mm
Weight	1.5 kg
Kit Box	TStak

\*Table reflects D2 version, M2 version shipped with 4.0Ah battery packs. Available as bare unit, without batteries and charger as N version on request



**18V XR Li-Ion LED Pivot Light** **DCL040\***



Compact, lightweight design with impact resistant housing  
LED Bulb producing 110 Lumen output (10,000Hr Life) with a 2 Zone light pattern  
Flashlight head pivots more than 90 degrees vertically with ratchet lock  
Flashlight includes an integrated hook for hanging & can be used free standing,

**Standard Equipment:** Battery and charger sold separately

Bulb Type	LED
Height x Length	240 x 115 mm
Weight (incl. battery)	0.6 g

\*Battery and charger sold separately



**18V XR Li-Ion Handheld LED Worklight** **DCL050**



Variable light settings for maximum brightness or extended runtime  
250-500 lumen output with broad and even beam pattern  
Up to 10 hours\* runtime  
Nine position articulating lamp head for directional control of light output  
Extendable hanging hook allows worklight to be suspended during use  
Battery and charger sold separately

**Standard Equipment:** Battery and charger sold separately

Voltage	18V
Bulb Type	LED
Light Output	250-500 lm
Protection Class	IP54
Height	345mm
Length	95mm
Weight (incl. battery)	1100g

\*Battery and charger sold separately



**18V XR 18V Area Light** **NEW DCL060**



1500 lumen output with broad and even beam pattern  
AC/DC power for use cordless or with mains power  
3.3 hours runtime with a 5.0Ah XR battery pack  
Rotatable lamp head for directional control of light output  
Lens protected when light is off for durability in transit

Battery chemistry	XR Li-Ion
Voltage	18 V
Bulb Type	LED
Light Output	1500 lm
Weight (incl. battery)	1480 g

**Standard Equipment:** Battery and charger sold separately



**XR 18V Spotlight** **NEW DCL043**



High power LED Spotlight provides focused high intensity beam  
Delivers 1000 lumen max. output  
400m distance rating  
Over 10 hours of runtime with a 5.0Ah battery  
Rugged and durable design, IP 54 rated  
Battery and charger sold separately

Battery chemistry	XR Li-Ion
Voltage	18 V
Bulb Type	LED
Light Output	120-1000 lm
Protection Class	IP54
Weight (incl. battery)	640 g

**Standard Equipment:** Battery and charger sold separately



**XR COMBO KITS**

DeWALT Combo kits are available in a variety of modular storage systems, that provide ultimate convenience and flexibility.

The wide range of Combo kits available allows DeWALT users to design a perfect solution for their trade & applications.



**10.8V XR Combokit DCK211C2T/DCK211D2T\***



- DCD710 Drill Driver
- DCF815 Impact Driver
- 2 x 1.3 Ah Slide Pack batteries\*
- 10.8V Charger
- TSTAK V Kit Box

\* Available with 2.0 Ah slide pack batteries

**10.8V XR Combokit DCK211C2FT/DCK211D2FT**



- DCD710 Drill Driver
- DCF815 Impact Driver
- DCL508 LED Flashlight
- 2 x 1.3Ah Slide Pack batteries\*
- 10.8V Charger
- TSTAK V Kit Box

\* Available with 2.0 Ah slide pack batteries

**10.8V XR Combokit DCK310C2T**



- DCD710 Drill Driver
- DCF815 Impact Driver
- DCS310 Compact Reciprocating Saw
- 2 x 1.3Ah Slide Pack batteries
- 10.8V Charger
- TSTAK V Kit Box

**10.8V XR Combokit DCK410C3FT**



- DCD710 Drill Driver
- DCF815 Impact Driver
- DCS310 Compact Reciprocating Saw
- DCL508 LED Flashlight
- 3 x 1.3Ah Slide Pack batteries
- 10.8V Charger
- TSTAK V Kit Box

**14.4V XR Li-Ion 2 Kit DCK235C2\*/M2**



- DCD735 Compact Hammer Drill
- DCF835 Impact Driver
- 2 x 1.5Ah Slide Pack Batteries
- Multi-voltage charger
- DS150 Tough System Kit Box

\*M2 version comes with 4.0Ah battery packs

**14.4V XR Li-Ion 2 Kit DCK232C2**



- DCD735 Compact Hammer Drill
- DCL030 LED Pivot Light
- 2 x 1.5Ah Slide Pack Batteries
- Multi-voltage charger
- DS150 Tough System Kit Box

**14.4V XR Brushless Combokit (Compact HDD+Impact) DCK245D2/M2\***



- DCD737 Brushless Compact Hammer Drill
- DCF836 Brushless Impact Driver
- 2 x 2.0Ah Slide Pack Batteries
- Multi-voltage charger
- DS150 Tough System Kit Box

\*M2 version comes with 4.0Ah battery packs

**18V XR Brushless Combokit (Compact HDD+Impact) DCK250D2/M2/P2\***



- DCD795 Brushless Compact Hammer Drill
- DCF886 Brushless Impact Driver
- 2 x 2.0Ah Slide Pack Batteries
- Multi-voltage charger
- DS150 Tough System Kit Box

\*M2 version comes with 4.0Ah battery packs  
\*P2 version comes with 5.0Ah battery packs

**18V XR Brushless Combokit DCK255M2/P2\***



- DCD995 Brushless XRP Hammer Drill
- DCF886 Brushless Impact Driver
- 2 x 4.0Ah Slide Pack Batteries
- Multi-voltage charger
- DS150 Tough System Kit Box

\*P2 version comes with 5.0Ah battery packs

**18V XR Brushless Combokit DCK262P2**



- DCN690 Framing Nailer
- DCD780 Drill Driver
- 2 x 5.0Ah Slide Pack Batteries
- Multi-voltage charger
- DS400 Tough System Kit Box

**18V XR Li-Ion 2 Kit DCK285C2\*/M2**



- DCD785 Compact Hammer Drill
- DCF885 Impact Driver
- 2 x 4.0Ah Slide Pack Batteries
- Multi-voltage charger
- DS150 Tough System Kit Box

\*C2 version comes with 1.5Ah battery packs

**18V XR Li-Ion2 Kit DCK282C2**



- DCD785 Compact Hammer Drill
- DCL040 LED Pivot Light
- 2 x 1.5Ah Slide Pack Batteries
- Multi-voltage charger
- DS150 Tough System Kit Box

**18V XR Li-Ion 2 Kit DCK290M2**



- DCD985 XRP Hammer Drill
- DCF885 Impact Driver
- 2 x 4.0Ah Slide Pack Batteries
- Multi-voltage charger
- DS150 Tough System Kit Box

**18V XR Li-Ion 2 Kit DCK295M2**



- DCD985 XRP Hammer Drill
- DCF880 Impact Wrench
- 2 x 4.0Ah Slide Pack Batteries
- Multi-voltage charger
- DS150 Tough System Kit Box

**18V & 10.8V XR Li-Ion 2 Kit DCK291MS**



- DCH253 SDS-Plus Rotary Hammer
- DCF815 Sub Compact Impact Driver
- 1 x 4.0Ah 18V & 1 x 1.5Ah 10.8V Slide Pack Batteries
- Multi-voltage charger
- DS300 Tough System Kit Box

**18V XR Li-Ion 2 Kit DCK288M2**



- DCD985 Hammer Drill Driver
- DCH253 SDS-Plus Rotary Hammer
- 2 x 4.0Ah Slide Pack Batteries
- Multi-voltage charger
- DS300 Tough System Kit Box

**18V XR Li-Ion 2 Kit DCK287M2**



- DCD780 Compact Drill
- DCH253 SDS-Plus Rotary Hammer
- 2 x 4.0Ah Slide Pack Batteries
- Multi-voltage charger
- DS300 Tough System Kit Box

**18V XR Li-Ion 2 Kit DCK293M2**



- DCD985 XRP Hammer Drill
- DCG412 Grinder
- 2 x 4.0Ah Slide Pack Batteries
- Multi-voltage charger
- DS300 Tough System Kit Box



**18V XR Li-Ion 2 Kit DCK258D2T**



DCD790 Brushless Compact Drill Driver  
 DCF886 Brushless Impact Driver  
 2 x 2.0Ah Slide Pack Batteries  
 DCB105 Multi-voltage charger  
 TSTAK II

**18V XR Li-Ion 2 Kit DCK258M2T**



DCD790 Brushless Compact Drill Driver  
 DCF886 Brushless Impact Driver  
 2 x 4.0Ah Slide Pack Batteries  
 DCB105 Multi-voltage charger  
 TSTAK II

**18V XR Li-Ion 2 Kit DCK288M2T**



DCD995 Hammer Drill Driver  
 DCH253 SDS-Plus Rotary Hammer  
 2 x 4.0Ah Slide Pack Batteries  
 DCB105 Multi-voltage charger  
 TSTAK VI

**18V XR Li-Ion 2 Kit DCK382M2T**



DCD795 Brushless Compact Hammer Drill  
 DCF886 Brushless Impact Driver  
 DCG412 Grinder  
 DCB105 Multi-voltage charger  
 2 x 4.0Ah Slide Pack Batteries  
 2 x TSTAK II

**18V XR Li-Ion 2 Kit DCK259D2T**



DCD795 Brushless Compact Hammer Drill Driver  
 DCF886 Brushless Impact Driver  
 2 x 2.0Ah Slide Pack Batteries  
 DCB105 Multi-voltage charger  
 TSTAK II

**18V XR Li-Ion 2 Kit DCK259M2T**



DCD795 Brushless Compact Hammer Drill Driver  
 DCF886 Brushless Impact Driver  
 2 x 4.0Ah Slide Pack Batteries  
 DCB105 Multi-voltage charger  
 TSTAK II

**18V XR Li-Ion 2 Kit DCK271M2**



DCH253 SDS-Plus Rotary Hammer  
 DCG412 Grinder  
 2 x 4.0Ah Slide Pack Batteries  
 Multi-voltage charger  
 DS300 Tough System Kit Box

**18V XR Li-Ion 2 Kit DCK294M2**



DCD985 XRP Hammer Drill  
 DCS391 Circular Saw  
 2 x 4.0Ah Slide Pack Batteries  
 Multi-voltage charger  
 DS300 Tough System Kit Box

**18V XR Li-Ion 2 Kit DCK252D2T**



DCD795 Brushless Compact Hammer Drill Driver  
 DCL040 LED Pivot Light  
 2 x 2.0Ah Slide Pack Batteries  
 DCB105 Multi-voltage charger  
 TSTAK II

**18V XR Li-Ion 2 Kit DCK253M2T**



DCD790 Brushless Compact Drill Driver  
 DCG412 Grinder  
 2 x 4.0Ah Slide Pack Batteries  
 DCB105 Multi-voltage charger  
 TSTAK VI

**18V XR Li-Ion 5 Kit DCK591M3**



DCD785 Compact Hammer Drill  
 DCF885 Impact Driver  
 DCS391 Circular Saw  
 DCS380 Reciprocating Saw  
 DCL040 LED Pivot Light  
 3 x 4.0Ah Slide Pack Batteries  
 Multi-voltage charger  
 DS150 Tough System Kit Box  
 DS300 Tough System Kit Box

**18V XR Li-Ion 2 Kit DCK257D2T**



DCD795 Brushless Compact Hammer Drill Driver  
 DCS355 Brushless Oscillating Tool  
 2 x 2.0Ah Slide Pack Batteries  
 DCB105 Multi-voltage charger  
 TSTAK II

**18V XR Li-Ion 2 Kit DCK273M2T**



DCD790 Brushless Compact Drill  
 DCH253 SDS-Plus Rotary Hammer  
 2 x 4.0Ah Slide Pack Batteries  
 DCB105 Multi-voltage charger  
 TSTAK VI

**18V XR Li-Ion 5 Kit DCK550M3T**



DCD795 Brushless Compact Hammer Drill  
 DCF886 Brushless Impact Driver  
 DCS331 Jigsaw  
 DCS391 Circular Saw  
 DCL040 LED Flashlight  
 3 x 4.0Ah Slide Pack Batteries  
 Multi-voltage charger  
 TSTAK I Kit Box  
 TSTAK VI Kit Box

**18V XR Li-Ion 2 Kit DCK254M2T**



DCD995 Brushless XRP Hammer Drill  
 DCF880 Impact Wrench  
 2 x 4.0Ah Slide Pack Batteries  
 DCB105 Multi-voltage charger  
 TSTAK II

**18V XR Li-Ion 2 Kit DCK256M2T**



DCD995 Brushless XRP Hammer Drill  
 DCG412 Grinder  
 2 x 4.0Ah Slide Pack Batteries  
 DCB105 Multi-voltage charger  
 TSTAK VI

**18V XR Li-Ion 5 Kit DCK594M3**



DCD995 Brushless XRP Hammer Drill  
 DCS391 Circular Saw  
 DCS380 Reciprocating Saw  
 DCS331 Jigsaw  
 DCL040 LED Pivot Light  
 3 x 4.0Ah Slide Pack Batteries  
 Multi-voltage charger  
 DS150 Tough System Kit Box  
 DS300 Tough System Kit Box

**XR LI-ION BATTERY CHARGER CHART**



	DCB105	DCB107	DCB112	DCB119	DCR017
<b>DCB125</b> 10.8V 1.3Ah Li-Ion	✓	✓	✓	✓	✓
<b>DCB127</b> 10.8V 2.0Ah Li-Ion	✓	✓	✓	✓	✓
<b>DCB145</b> 14.4V 1.3Ah Li-Ion	✓	✓	✓	✓	✓
<b>DCB143</b> 14.4V 2.0Ah Li-Ion	✓	✓	✓	✓	✓
<b>DCB142</b> 14.4V 4.0Ah Li-Ion	✓	✓	✓	✓	✓
<b>DCB144</b> 14.4V 5.0Ah Li-Ion	✓	✓	✓	✓	✓
<b>DCB185</b> 18V 1.3Ah Li-Ion	✓	✓	✓	✓	✓
<b>DCB181</b> 18V 1.5Ah Li-Ion	✓	✓	✓	✓	✓
<b>DCB183</b> 18V 2.0Ah Li-Ion	✓	✓	✓	✓	✓
<b>DCB182</b> 18V 4.0Ah Li-Ion	✓	✓	✓	✓	✓
<b>DCB184</b> 18V 5.0Ah Li-Ion	✓	✓	✓	✓	✓

**TOWER PACKS**

	DE9116	DE9135	DC013
<b>DE9062</b> 9.6V 1.3Ah NiCd	✓	✓	✓
<b>DE9074</b> 12V 1.3Ah NiCd	✓	✓	✓
<b>DE9071</b> 12V 1.3Ah NiCd	✓	✓	✓
<b>DE9091</b> 14.4V 2.0Ah NiCd	✓	✓	✓
<b>DE9098</b> 18V 1.3Ah NiCd	✓	✓	✓
<b>DE9095</b> 18V 2.0Ah NiCd	✓	✓	✓
<b>DE9501</b> 12V 2.4Ah NiMH	✓	✓	✓
<b>DE9502</b> 14.4V 2.6Ah NiMH	✓	✓	✓
<b>DE9503</b> 18V 2.6Ah NiMH	✓	✓	✓
<b>DE9182</b> 18V 2.0Ah Li-Ion		✓	✓

**7.2V LI-ION**

	DCB095
<b>DCB080</b> 7.2V 1Ah Li-Ion	✓

**36V LI-ION**

	DE9000
<b>DCB360</b> 36V 4.0Ah Li-Ion	✓
<b>DCB361</b> 36V 2.0Ah Li-Ion	✓

**7.2V Motion Activated Screwdriver**

**NEW** DCF68062/ DCF68062F\*



Inline position



Powerful 7.2V Screwdriver for screwdriving applications  
Gyroscopic operation coupled with variable speed up to 430rpm allows for the greatest levels of control  
Two position handle offers best ergonomic solution to suit user and application  
16 position clutch ring ensures repeatable accuracy of depth control with small screws  
State of charge gauge offers user peace of mind that there is plenty of charge left in the battery to complete the job  
Twin LEDs offer great work piece illumination

**Standard Equipment:** 2 x 7.2V Li-Ion battery packs, 7.2V Li-Ion charger, Heavy duty kitbox

Battery Capacity	1 Ah
Voltage	7.2 V
Max Torque	4 Nm
No Load Speed	0 - 430 rpm
Tool Holder	6.35 mm
Weight	0.5 kg
Length x Height	165 / 245 x 135 / 55 mm

\*Available with DCL023 Flashlight as DCF68062F on request

**7.2V Motion Activated Inline Screwdriver**

**NEW** DCF68261



Powerful 7.2V Screwdriver for screwdriving applications  
Gyroscopic operation coupled with variable speed up to 430rpm allows for the greatest levels of control  
Compact size helps drive screws in tight spaces  
State of charge gauge offers user peace of mind that there is plenty of charge left in the battery to complete the job  
Work light offers functional work piece illumination  
Bit retention is kept easy with one handed Drop 'n' Load system

**Standard Equipment:** 1 x 7.2V Li-Ion battery packs, 7.2V Li-Ion charger, kitbag

Voltage	7.2 V
Battery Capacity	1 Ah
Max Torque	4 Nm
No Load Speed	0 - 430 rpm
Tool Holder	6.35 mm
Weight	0.5 kg
Length	165 / 245 mm

**7.2V Flashlight**

**DCL023N\***



Compact, lightweight design with impact-resistant housing  
Battery and charger sold separately

**Standard Equipment:** Battery and charger sold separately

Bulb Type	LED
Height x Length	115 x 50 mm



\*Battery and charger sold separately



**36V Li-Ion Heavy Duty 3 Mode Dedicated Cordless Hammer**

**DCH363D2**



Ideal for drilling anchors and fixing holes into concrete, brick and masonry from 4mm to 26mm  
 Rotation stop mode for light chiselling in plaster, tiles and render and impact stop mode for rotary only drilling in wood and metal  
 Best in class vibration, 8.5m/s<sup>2</sup> reduces user fatigue and maximises operating periods  
 36 Volt Lithium Ion battery, delivers high performance, long life and maximum runtime

**Standard Equipment:** 2 x 2.0Ah Li-Ion battery packs, Charger, Multi-position side handle, Heavy duty kitbox

Battery	Li-Ion
Battery Capacity	2.0 Ah
Power Output	600 Watt
No Load Speed	0-1100 rpm
Impact energy (EPTA 05/2009)	2.3 J
Blows per Minute	0-4500 bpm
Tool Holder	SDS-Plus
Max. Drilling Capacity [Wood]	30 mm
Max. Drilling Capacity [Metal]	13 mm
Max. Drilling Capacity [Concrete]	26 mm
Weight	3.5 kg
Length x Height	314 x 223 mm
Hand/Arm Vibration - Drilling	7.1 m/s <sup>2</sup>



**36V Li-Ion Heavy Duty 3 Mode Quick Change Chuck Dedicated Cordless Hammer**

**DCH364M2**



Ideal for drilling anchors and fixing holes into concrete, brick and masonry from 4mm to 26mm  
 Rotation stop mode for light chiselling in plaster, tiles and render and impact stop mode for rotary only drilling in wood and metal  
 Best in class vibration, 8.5m/s<sup>2</sup> reduces user fatigue and maximises operating periods  
 Quick release SDS-Plus toolholder and keyless chuck supplied for easy switching between hammer / rotary hammer and rotary only applications

**Standard Equipment:** 2 x 4.0Ah Li-Ion battery packs, Charger, Multi-position side handle, Quick release SDS plus toolholder, Quick release 13mm 3 jaw chuck, Heavy duty kitbox

Battery	Li-Ion
Battery Capacity	4.0 Ah
Power Output	600 Watt
No Load Speed	0-1100 rpm
Impact energy (EPTA 05/2009)	2.3 J
Blows per Minute	0-4500 bpm
Tool Holder	SDS-Plus
Max. Drilling Capacity [Wood]	30 mm
Max. Drilling Capacity [Metal]	13 mm
Max. Drilling Capacity [Concrete]	26 mm
Weight	4.1 kg
Length x Height	340 x 223mm
Hand/Arm Vibration - Drilling	7.1 m/s <sup>2</sup>



**36V Li-Ion Dedicated Cordless Hammer with Integrated Dust Extraction System**

**NEW DCH365M2**



Ideal for drilling anchors and fixing holes into concrete, brick and masonry from 4mm to 26mm  
 Rotation stop mode for light chiselling in plaster, tiles and render and impact stop mode for rotary only drilling in wood and metal  
 Quick release SDS-Plus toolholder and keyless chuck supplied for easy switching between hammer / rotary hammer and rotary only applications  
 Includes D25302DH Dust Extraction System with quick release for easy tool free assembly

**Standard Equipment:** Integrated D25302DH dust extraction system with Hepa filter, 2 x 4.0Ah Li-Ion battery packs, Charger, Side handle with dust extraction adaptation, Quick release SDS plus toolholder, Quick release 13mm 3 jaw chuck, Heavy duty kitbox

Battery	Li-Ion
Battery Capacity	4.0 Ah
Power Output	600 Watt
No Load Speed	0-1100 rpm
Impact energy (EPTA 05/2009)	2.3 J
Blows per Minute	0-4500 bpm
Tool Holder	SDS-Plus
Max. Drilling Capacity [Wood]	30 mm
Max. Drilling Capacity [Metal]	13 mm
Max. Drilling Capacity [Concrete]	26 mm
Weight	5.8 kg
Length x Height	502 x 360 mm
Hand/Arm Vibration - Drilling	7.1 m/s <sup>2</sup>



**36V Cordless Dust Extraction System**

**D25302DH**



Ideal for dust free drilling up to 16 mm in diameter with any DeWALT 36V SDS-Plus hammer  
 Powered by an independent motor maintaining maximum hammer performance with no decrease in durability  
 High quality washable HEPA filter capable of achieving 99.5% efficiency with dust particles as small as 0.3 microns  
 Quick release for easy tool free assembly

**Standard Equipment:** Cordless dust extraction system, Side handle with dust extraction adaptation, Telescope, extraction head and depth rod, Connector pipe, Large kit box

Fits	Any DeWALT 28V or 36V SDS-Plus Hammer
Collar Diameter	54 mm
Max. Drill Bit Diameter	16 mm
Max. Drill Bit Length	210 mm
Max. Drilling Depth	150 mm
Hose Length	215 mm
Hose Diameter	32 mm
Weight	1.8 kg
Length x Height	502 x 360 mm



**36V Li-Ion Heavy Duty Hammer Drill Driver**

**DC901M2**



Powerful 36V combination tool for heavy duty hammer drilling and screw driving applications  
 Three speed settings for optimum performance in high torque, normal use and high speed applications  
 22 position adjustable torque control for uniform results and optimised precision when screw driving

**Standard Equipment:** 2 x 4.0Ah Li-Ion battery packs, Charger, Clip bit holder, Multi position side handle, Heavy duty kitbox

Battery Capacity	4.0 Ah
Max Torque	42 Nm
Power Output	750 Watt
No Load Speed	0-400/1200/1600 rpm
Beats per Minute	0-6800/20400/27200 bpm
Chuck Capacity	1.5-13 mm
Max. Drilling Capacity [Wood]	65 mm
Max. Drilling Capacity [Metal]	13 mm
Max. Drilling Capacity [Masonry]	16 mm
Weight	3.0 kg
Length x Height	267 x 260 mm



**36V Heavy Duty High Torque Impact Wrench**

**DC800M2**



Powerful fan cooled motor delivers up to 440 Nm of max torque and up to 2500 impacts per minute for heavy duty fastening applications  
All metal gearing for efficient power transmission and long tool life  
Aluminium front housing for better weight and balance  
Modular component design for easy access and fast service

**Standard Equipment:** 2 x 4.0Ah Li-Ion battery packs, 1 hour charger, Heavy duty carrying case

Battery Capacity	4.0 Ah
Max. Torque	440 Nm
Power Output	800 Watt
No Load Speed	1400 rpm
Impacts per Minute	2500 ipm
Max. Bolt Diameter	M20
Bit Holder	1/2"
Weight	3.4 kg
Length x Height	273 x 275 mm

**36 Volt Heavy Duty Cordless Circular Saw**

**DC300M2**



184 mm, 24 tooth carbide tipped blade allows for efficient run-time and fast, smooth cut finish at maximum 62 mm depth of cut  
0-50° bevel capacity with lever-action detents at 22.5° and 45° allows for aggressive bevel cuts while allowing users to locate common angles quickly

Battery pack produces 36 Volt Li-Ion power at equivalent weight to 18 Volt NiCd/NiMH pack weight

**Standard Equipment:** 1 hour charger, 2 x 4.0Ah Li-Ion battery packs, 184 mm 24 tooth carbide blade, Rip fence, Heavy duty carrying case

Battery Capacity	4.0 Ah
Blade Diameter	184 mm
Power Output	940 Watt
No Load Speed	4000 rpm
Bevel Capacity	50 °
Weight	4.49 kg
Length x Height	406 x 255 mm

**36 Volt Heavy Duty Cordless Finishing Grinder**

**DC415M2**



Powerful DeWALT fan cooled motor delivers maximum power and durability  
6,500 rpm provides high power for cutting and grinding applications  
Battery pack produces 36 Volt Li-Ion power at equivalent weight to 18 Volt NiCd/NiMH pack weight

**Standard Equipment:** 1 hour charger, 2 x 4.0Ah Li-Ion battery packs, Keyless protective guard, 2 position anti vibration side handle, Wrench, Heavy duty carrying case

Battery Capacity	2.0 Ah/4.0 Ah
Max. Disc Diameter	125 mm
Power Output	815 Watt
No Load Speed	6500 rpm
Spindle Thread	M14
Weight	3.5 kg
Length x Height	340 x 150 mm

**36 Volt Heavy Duty Cordless Reciprocating Saw**

**DC305M2**



Powerful DeWALT fan cooled motor with replaceable brushes and variable speed delivers fast cutting action up to 3000 strokes per minute and 29 mm stroke length  
4-position keyless blade clamp allows quick blade change, flush cutting, and versatility

Battery pack produces 36 Volt Li-Ion power at equivalent weight to 18 Volt NiCd/NiMH pack weight

**Standard Equipment:** 1 hour charger, 2 x 4.0Ah Li-Ion battery packs, Wood cutting blade, Heavy duty carrying case

Battery Capacity	4.0 Ah
Power Output	710 Watt
No Load Stroke Rate	0-3000 spm
Stroke Length	29 mm
Weight	3.81 kg
Length x Height	440 x 200 mm



**CONSTRUCTION INSTRUMENTS**


**3 Beam Self-Leveling Laser**

**DW083K**



Self leveling 3 beam laser, accurate to +/-0.2mm/m  
Self leveling up to 4 degrees surface angle  
One button operation - fast and easy operation of laser  
Pendulum locks when in 'off' position

Laser class	2, <1mW
Levelling Accuracy	+/-0.2 mm/m
Self-levelling range	+/- 4 °
Number of beams	3
Direction of beams	up/down/level
Indoor Visibility Range	30 m
Power Source	6V - 4 x AA Alkaline batteries
Tripod connection	1/4" (6.35mm)
Weight (incl. battery)	0.55 g
Length x Height	135 x 100 mm




**5 Point Self-Leveling Laser**

**DW085K**



Self leveling 5 beam laser, accurate to +/-0.2mm/m  
Self leveling up to 4 degrees surface angle  
One button operation - fast and easy operation of laser  
Pendulum locks when in 'off' position

Laser class	2, <1mW
Levelling Accuracy	+/-0.2 mm/m
Self-levelling range	+/- 4 °
Number of beams	5
Direction of beams	up/down/level/square
Indoor Visibility Range	30 m
Power Source	6V - 4 x AA Alkaline batteries
Tripod connection	1/4" (6.35mm)
Weight (incl. battery)	0.55 g
Length x Height	135 x 106 mm



**5 Spot & Cross Line Laser**


**NEW DW0851-XJ**



Projects 5 bright spot beams for accurate plumb and horizontal point transfer  
Range : 30M - Accuracy : +/- 3mm/15m  
Self Leveling Spot Beams and Horizontal Line - Rear projecting horizontal line aids in additional leveling applications  
Projects Down Beam with Raised Clearance - Provides dot visibility and alignment for wall track layout  
Integrated Magnetic Pivoting Base with 1/4" Thread - Front and rear mounted magnets allow flush attachment to metal track and steel

Laser class	2
Levelling Accuracy	3mm/15m
Self-levelling range	4 °
Number of beams	5+1 Backline
Direction of beams	5
Indoor Visibility Range	30m
Power Source	1mw
Tripod connection	yes
Weight (incl. battery)	716 g
Length x Height	140 x 135mm

**Standard Equipment:** 3 x AA size alkaline batteries, Wall mount bracket, Heavy duty carrying case



**2 Way Self-Levelling Line Laser (Horizontal and Vertical)**

**DW088K**



Self-levelling cross line laser is accurate to ±0.3 mm/m in levelling applications  
Self-Leveling up to 4 degrees surface angle with automatic out of level indication, marks a levelled line in seconds  
2 button operation and low battery indication for ease of use  
Built in magnetic pivot bracket mounts easily on metal surfaces

Laser class	2, <1mW
Poesnost	+/-0.3 mm/m
Number of beams	2
Direction of beams	vertical/level
Indoor Visibility Range	10 m
Self-Levelling Range	+/-4 °
Power Supply	4.5V - 3x AA
Tripod connection	1.4"
Weight (incl. battery)	0.46 g
Length x Height	112 x 113 mm

**Standard Equipment:** 3 x AA size alkaline batteries, Wall mount bracket, Heavy duty carrying case



**2 Way Self-Leveling Line Laser+Plumb**


**NEW DW0822-XJ**



Projects bright crossing horizontal and vertical lines  
Range : 15M-50M - Accuracy : +/- 3mm/15m  
Self Leveling Cross Line and Plumb Spots - 2 bright, self leveling beams provide accurate plumb point transfer  
Projects Down Beam with Raised Clearance - Provides dot visibility and alignment for wall track layout  
Integrated Magnetic Pivoting Base with 1/4" Thread - Front and rear mounted magnets allow flush attachment to metal track and steel  
Full-Time Pulse Mode Allows Use with Detector - Maintains full brightness for visibility

Laser class	2
Poesnost	3mm/15m
Number of beams	2+1 Plumb
Direction of beams	Up / down
Indoor Visibility Range	50 m
Self-Levelling Range	4 °
Power Supply	3xAA
Tripod connection	YES
Weight (incl. battery)	786 g
Length x Height	130 x 130mm

**Standard Equipment:** 3 x AA size alkaline batteries, Wall mount bracket, Heavy duty carrying case



**3 Way Self-Levelling Multi Line Laser (Horizontal, Vertical and Side Lines)**

**DW089K**



Self-levelling multi line laser is accurate to ±0.3 mm/m in levelling applications  
Self-Leveling up to 4 degrees surface angle with automatic out of level indication, marks a levelled line in seconds  
3 button operation and low battery indication for ease of use  
An adjustment dial for fine line movement (vertical & side)

**Standard Equipment:** 4 x AA size alkaline batteries, Wall mount bracket, Heavy duty carrying case

Laser class	2, <1mW
Poesnost	+/-0.3 mm/m
Number of beams	3
Direction of beams	vertical/horizontal/side
Indoor Visibility Range	15 m
Self-Levelling Range	+/-4 °
Power Supply	6.0V - 4 x AA
Tripod connection	1/4"
Weight (incl. battery)	0.8 g
Length x Height	135 x 145 mm



**Plumb Spot & Cross Line Laser**


**NEW DW0811-XJ**



Simulates functionality of rotary laser  
Range : 10M-30M - Accuracy : +/- 4mm/10m  
Self leveling 360° line and vertical line - Projects bright crossing horizontal and vertical lines  
Vertical-Adjust Base - For easy set-up and fine tune adjustments  
1/4" and 5/8" Thread Mounts - Thread Mounts For versatility  
Full-time pulse mode allows use with detector - Detector Maintains full brightness for visibility  
Locking Pendulum - To help prevent damage to internal components  
Durable Design - Over-molded housing and IP54 water/debris resistance

**Standard Equipment:** 3 x AA size alkaline batteries, Wall mount bracket, Heavy duty carrying case

Laser class	1
Poesnost	4mm/10m
Indoor Visibility Range	15 m (30m with Detector)
Self-Levelling Range	4 °
Power Supply	3xAA
Tripod connection	YES
Weight (incl. battery)	652 g
Length x Height	120 x 120 mm



**26 x Auto Level Kit**

**DW096PK**



26 x magnification for 100 m+ range  
360° horizontal circle for precise measuring of horizontal angles  
Vial set-up with final 1° self levelling capability for extra ease of use  
Magnetically dampened compensator that maintains compensation over product life and for easy setup with optimum range and accuracy

**Standard Equipment:** Heavy duty 2.44 m aluminum grade rod, Aluminium construction tripod, String plumb bob, Heavy duty carrying case

Levelling Type	Auto
Magnification	26x
Accuracy	2 mm
Range	100 m
Stadia Ratio	1:100
Horizontal Circle Type	Continuous Drive
Weight	1.72 kg
Length x Height	207 x 145 mm



**Self-Levelling Rotary Laser Kit**

**DW079KH**



Fully self-levelling horizontal and vertical rotary laser for internal and external applications  
Levelling accuracy of 0.1 mm/m combined with DeWALT durability  
Built in beam-splitting prism allows easy squaring and plumb bob applications  
The remote control features a manual button to allow the user to tilt the laser plane in both X and Y axis

**Standard Equipment:** Wireless (IR) remote control, 18 Volt 2.6Ah NiMH battery, 1 hour charger, Wall mount, Laser target card, Laser enhancement glasses, Digital detector (DE0772-XJ), Heavy duty carrying case

Laser class	3R, <5mW
Levelling accuracy	+/- 0.1 mm/m
Self-levelling range	+/- 5 °
Indoor Visibility Range	30 m
Max. Working Range with Receiver	300 m
Rotation speed	0, 10, 50, 200, 600 rpm
sloping range in X and Y axis	+/- 5 °
Power Source	9.6V - 18V, NiCd/NiMH/Li-ion DeWALT batteries
Tripod connection	5/8"
Weight (incl. battery)	2.0 g
Length x Height	305 x 190 mm



**Self-Levelling Rotary Laser Kit**

**DW079PKH**



Fully self-levelling horizontal and vertical rotary laser for internal and external applications  
Levelling accuracy of 0.1 mm/m combined with DeWALT durability  
Built in beam-splitting prism allows easy 90° lay out and plumb up applications  
The remote control features a manual button to allow the user to tilt the laser plane in the X and Y axis

**Standard Equipment:** DW079KH, Digital Detector (DE0772-XJ), Combi grade rod (DE0737-XJ), Heavy duty telescopic tripod (DE0735-XJ), Gradient bracket (DE0738-XJ), Wireless (IR) remote control, 18 Volt 2.6Ah NiMH battery, 1 hour charger, Laser target card, Wall mount, Laser enhancement glasses, Heavy duty carrying case

Laser class	3R, <5mW
Levelling accuracy	+/- 0.1 mm/m
Self-levelling range	+/- 5 °
Indoor Visibility Range	30 m
Max. Working Range with Receiver	300 m
Rotation speed	0, 10, 50, 200, 600 rpm
sloping range in X and Y axis	+/- 5 °
Power Source	9.6V - 18V, NiCd/NiMH/Li-ion DeWALT batteries
Tripod connection	5/8"
Weight (incl. battery)	2.0 g
Length x Height	305 x 190 mm



**LASER DISTANCE METER - 50M**

**DW03050**



Laser distance measurer (LDM) manufactured to withstand the inevitable drops and falls on the Job site  
It has a range of up to 50m and an accuracy of +/- 1,5mm  
Common end-user functions : linear meter readings, surface and volume calculations. It will add or subtract readings and calculate distance in Metric and Imperial.  
The user can select the unit to continually measure which allows layout applications.

**Standard Equipment:** 2 x 1.5v dc LR03 (AAA-size) batteries

Laser class	Class 2
Levelling Accuracy	+/- 1,5mm/m
Number of beams	1
Indoor Visibility Range	50m
Power Source	2 x 1.5v dc LR03 (AAA-size) batteries
Weight (incl. battery)	150 g
Length x Height	tbc x tbc mm



**LASER DISTANCE METER - 100M**

**DW03101**



Laser distance measurer (LDM) manufactured to withstand the inevitable drops and falls on the Job site  
It has a range of up to 100m and an accuracy of +/- 1mm  
Common end-user functions : linear meter readings, surface and volume calculations. It will add or subtract readings and calculate distance in Metric and Imperial.  
The user can select the unit to continually measure which allows layout applications.

**Standard Equipment:** 2 x 1.5v dc LR03 (AAA-size) batteries

Laser class	Class 2
Levelling Accuracy	+/- 1mm/m
Number of beams	1
Indoor Visibility Range	100m
Power Source	2 x 1.5v dc LR03 (AAA-size) batteries
Tripod connection	yes
Weight (incl. battery)	130 g
Length x Height	tbc x tbc mm



**Laser Level Attachments**



Cat. No.	Description
DE0730	Laser Target Card
DE0734	Aluminium Construction Grade Rod (1.2m - 4m)
DE0735	Elevated Laser Construction Tripod (1.15m - 3.0m)
DE0736	Aluminium Construction Tripod (1.07m - 1.73m)
DE0737	2.4m Construction Grade Rod
DE0738	Gradient Setting Bracket
DE0892	Line Laser Detector
DE0881	Lightweight 1/4" Thread Mini Tripod
DE0882	Floor to Ceiling 1/4" Thread Laser Pole
DE0731	15.8mm (5/8") to 6.35mm (1/4") tripod adapter

To help you choose the right laser - please consider the following • Manual or self levelling • Laser functions • Working inside or outside • Working range/distance

	DW083K	DW085K	DW088K	DW089K	DW079PKH	DW096PK
Interior		Gold	Gold	Gold	Gold	Silver
Exterior		Silver	Silver	Silver	Gold	Gold
Interior			Gold	Gold	Gold	
Exterior			Silver	Silver	Gold	
Face Square			Gold	Gold		
Level & Square		Gold		Gold		
Level & Square Exterior		Silver		Silver		
90° Square				Gold	Gold	
Vertical & Square		Gold		Gold		
Vertical Transfer	Gold	Gold		Gold		
Angle Transfer/ Setting						Gold
Distance Estimation						Gold
Optimum Working Range	30	25	10	15	30	100
	n/a	n/a	50	50	300	n/a

Gold Choice Silver Choice



# DRILLING & SCREWDRIVING

## Drywall Screwdriver

DW274K / DW274KN\*



Ideal for fastening drywall and panels to wooden or metal studs  
 Removeable depth sensitive "set and forget" nosepiece for consistent fastener depth  
 Lightweight and compact design to reduce user fatigue and increase productivity  
 Soft grip surface on handle and switch to reduce vibration and enhance user comfort

**Standard Equipment:** Depth sensitive nose, Screwdriver bit holder & Ph2 screwdriver bit, Belt clip, Heavy duty carrying case

Max Torque	10 Nm
Power Input	540 Watts
Power Output	295 Watt
No Load Speed	0-4000 rpm
Max. Screw Diameter	4.8 mm
Tool Holder	(Hex) 6.35 mm
Weight	1.3 kg
Length x Height	306 x 186 mm

\* Available with silent clutch as N version, DW274KN on request



## High Speed Drywall Screwdriver

DW275K / DW275KN\*



Ideal for fastening drywall and panels to wooden or metal studs  
 Removeable depth sensitive "set and forget" nosepiece for consistent fastener depth  
 High speed for increased productivity  
 Lightweight and compact design to reduce user fatigue and increase productivity

**Standard Equipment:** Depth sensitive nose, Screwdriver bit holder & Ph2 screwdriver bit, Belt clip, Heavy duty carrying case

Max Torque	10 Nm
Power Input	540 Watts
Power Output	295 Watt
No Load Speed	0-5300 rpm
Max. Screw Diameter	4.8 mm
Tool Holder	(Hex) 6.35 mm
Weight	1.3 kg
Length x Height	306 x 186 mm

\* Available with silent clutch as N version, DW275K, DW275KN on request



## VSR Depth Sensitive Screwdriver

DW266



"Set and forget" nosepiece maintains depth adjustment and ensures consistent fastener depth  
 One stage gear reduction delivers speed necessary for high productivity  
 Variable speed with reversing allows for easy screw starting and fast removal of screws  
 Fine depth adjustments ensure accurate depth setting

Max Torque	14.5 Nm
Power Input	540 Watts
Power Output	295 Watt
No Load Speed	0-2500 rpm
Gear Reduction	On stage
Tool Holder	(Hex) 6.35 mm
Weight	1.3 kg
Length x Height	301 x 187 mm



## Versadutch Screwdriver

DW268K



Ideal for screwdriving applications in wood, plastic and metal  
 Versatile tool with torque control up to 26 Nm  
 Unique Versa Clutch Torque Control System allows a torque level to be set whilst maintaining an override capability for driving screws into material of inconsistent density such as wood  
 Lightweight and compact design to reduce user fatigue and increase productivity

**Standard Equipment:** Heavy duty carrying case

Max Torque	4-26 Nm
Power Input	540 Watts
Power Output	295 Watt
No Load Speed	0-2500 rpm
Max. Screw Diameter	6.3 mm
Tool Holder	(Hex) 6.35 mm
Weight	1.3 kg
Length x Height	301 x 187 mm



## High Torque Versadutch Screwdriver

DW269K



Ideal for screwdriving applications in wood, plastic and metal  
 Versatile tool with torque control up to 42 Nm  
 Unique Versa Clutch Torque Control System allows a torque level to be set whilst maintaining an override capability for driving screws into material of inconsistent density such as wood  
 Lightweight and compact design to reduce user fatigue and increase productivity

**Standard Equipment:** Heavy duty carrying case

Max Torque	4-42 Nm
Power Input	540 Watts
Power Output	295 Watt
No Load Speed	0-1000 rpm
Max. Screw Diameter	6.3 mm
Tool Holder	(Hex) 6.35 mm
Weight	1.3 kg
Length x Height	301 x 187 mm



**Screwdriver for Self Drilling Screws**

**DW263K**



Ideal for fascia, cladding and roofing applications  
Specially designed for working with self-drilling screws  
Removeable depth sensitive "set and forget" nosepiece for consistent fastener depth  
Lightweight and compact design to reduce user fatigue and increase productivity

**Standard Equipment:** 8 mm magnetic bit holder for self drilling screws, nose adapters (13 mm, 15 mm), Depth sensitive nose, Heavy duty carrying case

Max Torque	14.5 Nm
Power Input	540 Watts
Power Output	295 Watt
No Load Speed	0-2500 rpm
Max. Screw Diameter	6.3 mm
Tool Holder	(Hex) 6.35 mm
Weight	1.3 kg
Length x Height	301 x 186 mm



**High Torque Screwdriver for Self Drilling Screws**

**DW264K**



Ideal for fascia, cladding and roofing applications  
Specially designed for working with self-drilling screws  
Removeable depth sensitive "set and forget" nosepiece for consistent fastener depth  
Lightweight and compact design to reduce user fatigue and increase productivity

**Standard Equipment:** 8 mm magnetic bit holder for self drilling screws, nose adapters (13 mm, 15 mm), Depth sensitive nose, Heavy duty carrying case

Max Torque	18 Nm
Power Input	540 Watts
Power Output	295 Watt
No Load Speed	0-2000 rpm
Max. Screw Diameter	6.3 mm
Tool Holder	(Hex) 6.35 mm
Weight	1.3 kg
Length x Height	301 x 186 mm



**Heavy Duty Impact Wrench 1/2"**

**DW292**



440 Nm of deliverable torque in forward and reverse  
Higher torque and faster speed increased productivity  
Soft grip handle to reduce vibrations and to enhance user comfort  
Robust design for increased durability

**Standard Equipment:** 1/2 inch ring retainer

Max Torque	440 Nm
Power Input	710 Watts
Power Output	370 Watt
No Load Speed	2200 rpm
Impacts per Minute	2700 ipm
Max. Bolt Diameter	M20
Bit Holder	1/2"
Weight	3.2 kg
Length x Height	292 x 216 mm



**Heavy Duty Impact Wrench 3/4"**

**DW294**



440 Nm of deliverable torque in forward and reverse  
Robust 3/4" anvil  
Compact and light weight to reduce user fatigue  
Soft grip handle to reduce vibrations and to enhance user comfort

**Standard Equipment:** 3/4 inch ring retainer

Max Torque	440 Nm
Power Input	710 Watts
Power Output	370 Watt
No Load Speed	2200 rpm
Impacts per Minute	2700 ipm
Max. Bolt Diameter	M20
Bit Holder	3/4"
Weight	3.2 kg
Length x Height	292 x 216 mm



**13 mm Mixer and Rotary Drill**

**D21520**



Variable speed reversing switch offers greater control for a wider range of applications  
550 RPM provides increased torque for heavy duty drilling and mixing  
Robust design and metal gear case for greater durability  
2-position rear spade handle and 3-position side handle gives greater control

**Standard Equipment:** 3-position side handle, 2-position rear handle, Chuck key with holder

Chuck Capacity	2.0-13 mm
Spindle Thread	5/8" x 16 U.N.F.
Tool Holder	Keyed Chuck
Power Input	710 Watts
Power Output	560 Watt
Max Torque	50 Nm
No Load Speed	0-550 rpm
Max. Capacity	160 mm
Weight	3.4 kg
Length x Height	400 x 215 mm



**Mixer with M14 Fitment**

**D21510**



Ideal for mixing viscous materials like paints, mortar, drywall compound, etc.  
Forward operation only  
550 RPM provides increased torque for heavy duty mixing  
Uses mixer baskets up to 160mm (M14 thread)

**Standard Equipment:** 3-position side handle, 2-position rear handle, M14 connector

Spindle Thread	5/8" x 16 U.N.F.
Tool Holder	M14
Power Input	710 Watts
Power Output	560 Watt
Max Torque	50 Nm
No Load Speed	0-550 rpm
Max. Capacity	160 mm
Weight	3.0 kg
Length x Height	420 x 215 mm



**750W 13mm Percussion Drill**

**DWD024/ DWD024K/ DWD024S/ DWD024KS\***



Low weight ensures the drill is easy to use and it reduces user fatigue  
Compact design enables comfortable use and allows access to tight spaces  
An excellent power to size ratio results in a powerful, durable drill in a compact size  
Trigger sensitive variable speed switch allows a user to drill slowly for precision accuracy when starting to drill a hole

**Standard Equipment:** Chuck key, Multi-position side handle, Depth stop

Chuck Capacity	1.5-13 mm
Power Input	750 Watts
Power Output	302 Watt
Max Torque	8.6 Nm
No Load Speed	0-2800 rpm
Blows per Minute	47600 bpm
Max. Drilling Capacity [Wood]	25 mm
Max. Drilling Capacity [Steel]	13 mm
Max. Drilling Capacity [Concrete]	16 mm
Spindle Thread	1/2" x 20 U.N.F.
Weight	1.82 kg
Length x Height	255 x 180 mm

\*Available with heavy duty carrying case as K version and with keyless chuck as S version, DWD024, DWD024S, DWD024KS on request





**650 W - 2 Speed Percussion Drill**

**D21721K**



Very compact and lightweight to enhance user comfort  
Two speed gearbox for increased torque and more versatility  
Variable speed control with forward and reverse mode to suit different materials  
Dust sealed switch for added durability

**Standard Equipment:** Keyless Chuck, kitbox, multi position side-handle, depth stop

Chuck Capacity	1.5-13 mm
Power Input	650 Watts
Power Output	325W Watt
Max Torque	30/12 Nm
No Load Speed	0-1100 / 0-2600 rpm
Blows per Minute	0-19000 / 0-44200 bpm
Max. Drilling Capacity [Wood]	40/25 mm
Max. Drilling Capacity [Steel]	13 mm
Max. Drilling Capacity [Concrete]	16 mm
Spindle Thread	1/2" x20 U.N.F.
Weight	2.1 kg
Length x Height	330 x 199 mm



**770 W - Percussion Drill with Kit box**

**D21805K / D21805KS\***



Two speed gearbox for increased torque  
Improved drilling performance due to NEW motor  
Improved ergonomics with NEW polymer gear case  
NEW gear design to give improved life

**Standard Equipment:** Keyed chuck, Chuck key, Depth stop, Multi-position side handle, Heavy duty carrying case

Chuck Capacity	1.5-13 mm
Power Input	770 Watts
Power Output	425 Watt
Max Torque	40/20 Nm
No Load Speed	0-1100 / 0-2700 rpm
Blows per Minute	0-18700 / 0-45900 bpm
Max. Drilling Capacity [Wood]	35 mm
Max. Drilling Capacity [Steel]	13 mm
Max. Drilling Capacity [Concrete]	20 mm
Spindle Thread	1/2" X 20 U.N.F.
Weight	2.3 kg
Length x Height	352 x 199 mm

\*Available with heavy duty carrying case as K version and with keyless chuck as S version, D21805K on request



**950 W - 2 Speed Percussion Drill**

**DWD522KS**



Improved drilling performance from powerful NEW motor gives improved performance in heavy duty applications  
Innovative mode selection collar allows intuitive control for optimal performance  
Two speed gearbox for increased versatility  
Mechanical clutch increases user control and protection

**Standard Equipment:** multi-position side handle, depth stop, Heavy Duty Carrying Case.

Chuck Capacity	1.5-13 mm
Power Input	950 Watts
Power Output	415 Watt
Max Torque	40/20 Nm
No Load Speed	0-1250 0-3500 rpm
Blows per Minute	0-56000 bpm
Max. Drilling Capacity [Wood]	40 mm
Max. Drilling Capacity [Steel]	13 mm
Max. Drilling Capacity [Concrete]	20 mm
Spindle Thread	1/2" X 20 U.N.F.
Weight	2.8 kg
Length x Height	370 x 210 mm



**1100 W - 2 Speed Pistol Percussion Drill**

**DWD524KS**



Improved drilling performance from powerful NEW motor gives improved performance in heavy duty applications  
Innovative mode selection collar allows intuitive control for optimal performance  
Two speed gearbox for increased versatility  
Mechanical clutch increases user control and protection

**Standard Equipment:** multi-position side handle, depth stop, Heavy Duty Carrying Case.

Chuck Capacity	1.5-13 mm
Power Input	1100 Watts
Power Output	540 Watt
Max Torque	40/20 Nm
No Load Speed	0-1250 0-3500 rpm
Blows per Minute	0-5600 bpm
Max. Drilling Capacity [Wood]	40 mm
Max. Drilling Capacity [Steel]	13 mm
Max. Drilling Capacity [Concrete]	22 mm
Spindle Thread	1/2" X 20 U.N.F.
Weight	2.8 kg
Length x Height	370 x 210 mm



**1300 W - 2 Speed Percussion Drill**

**DWD530KS**



Improved drilling performance from powerful NEW motor gives improved performance in heavy duty applications  
Two speed gearbox for increased versatility  
Electro-Mechanical clutch increases user control and protection  
Innovative mode selection collar allows intuitive control for optimal performance

**Standard Equipment:** multi-position side handle, depth stop, Heavy Duty Carrying Case.

Chuck Capacity	1.5-13 mm
Power Input	1300 Watts
Power Output	680 Watt
Max Torque	40/20 Nm
No Load Speed	0-1250 0-3500 rpm
Blows per Minute	0-56000 bpm
Max. Drilling Capacity [Wood]	40 mm
Max. Drilling Capacity [Steel]	16 mm
Max. Drilling Capacity [Concrete]	22 mm
Spindle Thread	1/2" X 20 U.N.F.
Weight	2.8 kg
Length x Height	370 x 215 mm



**2 Speed Dry Diamond Drill with 16mm Keyed Chuck**

**D21570K**



NEW motor gives improved performance in applications with dry core bits up to 127mm in bricks or soft masonry  
Electronics provide e-clutch, power-up and overload protection  
Electro-Mechanical clutch increases user control and protection  
Two speed gearbox for increased versatility when drilling in wood, metal and concrete with standard drill bits

**Standard Equipment:** Multi-Position side handle, Depth Stop, Heavy Duty Carrying Case

Chuck Capacity	1.5-13 mm
Power Input	1300 Watts
Power Output	680 Watt
No Load Speed	0-1250 0-3500 rpm
Max. Drilling Capacity [Concrete]	22 mm
Max. Drilling Capacity [Masonry]	127 mm
Collar Diameter	43 mm
Weight	3 kg
Length x Height	380 x 215 mm



**10mm 0-2800rpm Rotary Drill with Keyless chuck**

**DWD014S**



Keyless ratcheting chuck for quick and easy bit change  
Compact design enables comfortable one handed use and allows access to tight spaces  
Low weight ensures the drill is easy to use and it reduces user fatigue  
Speed dial switch ensures constant speed control to suit different hole sizes in different materials

Chuck Capacity	1.0-10 mm
Power Input	550 Watts
Power Output	269 Watt
Max Torque	7.9 Nm
No Load Speed	0-2800 rpm
Max. Drilling Capacity [Wood]	25 mm
Max. Drilling Capacity [Steel]	10 mm
Spindle Thread	1/2" X 20 U.N.F.
Weight	1.34 kg
Length x Height	225 x 170 mm



**10 mm Rotary Drill with Keyed Chuck**

**DWD 112 / DWD 112S\***



Rubber grip gives maximum comfort to the user while drilling  
Ideal for use in a woodworking or light metal fabrication workshop to drill small holes into wood or sheet metal  
Size, balance and weight designed for one handed operation  
Variable speed switch control to suit different materials

Chuck Capacity	1.0-10 mm
Power Input	701 Watts
Power Output	358 Watt
Max Torque	10.9 Nm
No Load Speed	0-2500 rpm
Max. Drilling Capacity [Wood]	25 mm
Max. Drilling Capacity [Steel]	10 mm
Spindle Thread	1/2" X 20 U.N.F.
Weight	1.8 kg
Length x Height	230 x 190 mm



\*Available with keyless chuck as S version, DWD112, DWD112S on request

**10 mm Mid-Handle Rotary Drill DWD115KS**



Rubber grip gives maximum comfort to the user while drilling  
Ideal for use in a woodworking or light metal-fabrication workshop to drill small holes into wood or sheet metal  
All metal 10 mm keyless chuck for quick and easy bit change  
Well balanced mid-handle design similar to a cordless drill

**Standard Equipment:** Kitbox

Chuck Capacity	1.0-10 mm
Power Input	701 Watts
Power Output	358 Watt
Max Torque	10.9 Nm
No Load Speed	0-2500 rpm
Max. Drilling Capacity [Wood]	25 mm
Max. Drilling Capacity [Steel]	10 mm
Spindle Thread	1/2" x 20 U.N.F
Weight	1.9 kg
Length x Height	230 x 190 mm



**High Speed Rotary Drill DW217**



Ideal for high speed drilling of small, precise holes in metal or wood  
High overload capacity motor prevents failure in heavy duty applications  
10 mm keyless chuck for quick and easy bit change with one hand to aid productivity  
Heavy duty metal gear box for added durability

Chuck Capacity	0.5-10 mm
Power Input	675 Watts
Power Output	340 Watt
Max Torque	8.2 Nm
No Load Speed	0-4000 rpm
Max. Drilling Capacity [Wood]	20 mm
Max. Drilling Capacity [Steel]	8 mm
Spindle Thread	3/8" x 24 U.N.F
Weight	1.2 kg
Length x Height	247 x 177 mm



**Rotary Drill DW221**



Ideal for drilling applications in wood, aluminium, soft steel and alloys  
High overload capacity motor prevents failure in heavy duty applications  
10 mm keyless chuck with innovative spindle lock system for quick and easy bit change with one hand to aid productivity  
Heavy duty metal gear box for added durability

Chuck Capacity	1.5-10 mm
Power Input	701 Watts
Power Output	385 Watt
Max Torque	13.8 Nm
No Load Speed	0-2500 rpm
Max. Drilling Capacity [Wood]	25 mm
Max. Drilling Capacity [Steel]	10 mm
Spindle Thread	1/2" x 20 U.N.F
Weight	1.3 kg
Length x Height	275 x 190 mm



**Rotary Drill for Stainless Steel DW236i**



Ideal for drilling large holes in stainless steel  
High overload capacity motor prevents failure in heavy duty applications  
13 mm keyless chuck with innovative spindle lock system for quick and easy bit change with one hand to aid productivity  
Heavy duty metal gear box for added durability

**Standard Equipment:** Multi-position side handle, 6 piece cobalt drill bit set

Chuck Capacity	1.5-13 mm
Power Input	701 Watts
Power Output	385 Watt
Max Torque	35.8 Nm
No Load Speed	0-850 rpm
Max. Drilling Capacity [Wood]	30 mm
Max. Drilling Capacity [Steel]	13 mm
Spindle Thread	1/2" x 20 U.N.F
Weight	1.6 kg
Length x Height	295 x 198 mm



**770 W - 2 Speed Rotary Drill with Clutch D2144i**



Ideal for use in heavy steel fabrication  
Two speed gearbox for increased torque  
Improved drilling performance due to NEW motor wind  
NEW patented ball clutch to give greater user control

**Standard Equipment:** Multi-position side handle, Depth stop

Chuck Capacity	1.5-13 mm
Power Input	770 Watts
Power Output	425 Watt
Max Torque	40/20 Nm
No Load Speed	0-1100 / 0-2700 rpm
Max. Drilling Capacity [Wood]	35 mm
Max. Drilling Capacity [Steel]	13 mm
Spindle Thread	1/2" x 20 U.N.F
Weight	2.2 kg
Length x Height	352 x 199 mm



**High Torque Rotary Drill DW246**



Ideal for use in steel fabrication and construction industry  
High overload capacity motor prevents failure in heavy duty applications  
13 mm keyless chuck with innovative spindle lock system for quick and easy bit change with one hand to aid productivity  
High torque for easy conversion to light duty mixer supported by a triple gear reduction

**Standard Equipment:** Multi-position side handle

Chuck Capacity	1.5-13 mm
Power Input	701 Watts
Power Output	385 Watt
Max Torque	57.3 Nm
No Load Speed	0-600 rpm
Max. Drilling Capacity [Wood]	35 mm
Max. Drilling Capacity [Steel]	13 mm
Spindle Thread	1/2" x 20 U.N.F
Weight	1.6 kg
Length x Height	310 x 195 mm



**Low Speed Electronic Rotary Drill DWD221**



Ideal for use in steel fabrication and construction industry  
High overload capacity motor prevents failure in heavy duty applications  
13 mm keyless chuck with innovative spindle lock system for quick and easy bit change with one hand to aid productivity  
Motor lock control feature automatically switches off the unit in case of jammed drill bits to prevent motor overload

**Standard Equipment:** Multi-position side handle

Chuck Capacity	1.5-13 mm
Power Input	800 Watts
Power Output	385 Watt
Max Torque	40 Nm
No Load Speed	0-650 rpm
Max. Drilling Capacity [Wood]	38 mm
Max. Drilling Capacity [Steel]	13 mm
Spindle Thread	1/2" x 20 U.N.F
Weight	2.3 kg
Length x Height	310 x 215 mm



**10 mm Right Angle Rotary Drill D21160\***



Ideal for working in tight or narrow spaces  
Compact and lightweight design for easy handling  
The full body paddle switch supports the natural shape of your hand and ensures less user fatigue for prolonged use  
High torque to enable larger diameter hole drilling

**Standard Equipment:** Chuck keys

Chuck Capacity	1.0-10 mm
Power Input	350 Watts
Power Output	180 Watt
Max Torque	9.2 Nm
No Load Speed	0-1200 rpm
Max. Drilling Capacity [Wood]	20 mm
Max. Drilling Capacity [Steel]	10 mm
Spindle Thread	3/8" x 24 U.N.F
Weight	1.7 kg
Length x Height	262 x 50 mm

\*230V only

**2 Speed Magnetic Drill Press 50mm DWE1622K**



Delivers high level of performance for fast, clean and accurate drilling into steel  
Compact and light weight unit which is both easy to transport and easy to position for drilling.  
Overload protection with 3 stage LED indicator allows improved user control and prevents motor damage  
The universal quick release cutter holder is quick and easy to operate : no hex key needed. It accepts any annular cutter with 19 mm round shank (Weldon) with one or more flats.

**Standard Equipment:** Quick release cutter holder, Gravity fed cutting fluid tank, Reversible press handle, Drilling guard, Safety strap, Heavy duty carrying case, 16mm Chuck & Adapter

Power Input	1200 Watts
No Load Speed	350/450 rpm
Cutter holder	19mm Weldon shank (3/4")
Max cutting depth with cutters	50 mm
Max cutting diameter with cutters	50 mm
Drill point pressure	317 Kg
Clamping force	3800 N
Length of drill stroke	147 mm
Weight	14.55 kg
Magnetic base dimensions	180 x 84 mm



**1705 W - 2 Speed Dry Diamond Drill D21580K**



Ideal tool for electrical, plumbing or HVAC applications when drilling only into masonry and bricks  
 Quick and accurate core drilling into brick and masonry up to 152 mm  
 Increased power makes the job easier and faster  
 Overload and thermal protection increase the life of the tool

**Standard Equipment:** Multi-position side handle, Heavy duty carrying case

Spindle Thread	1/2" Male BSP
Power Input	1705 Watts
Power Output	1150 Watt
No Load Speed	0-1100/0-2350 rpm
Max. Drilling Capacity [Masonry]	152 mm
Collar Diameter	53 mm
Weight	5.4 kg
Length x Height	480 x 165 mm



**1910 W - Heavy Duty 3 Speed Wet & Dry Diamond Drill D21583K**



Ideal tool for heavy duty electrical, plumbing or HVAC applications when drilling predominantly into concrete  
 Integrated water swivel for core drilling into the hardest material up to 152 mm such as natural stone, concrete, engineering brick and reinforced concrete  
 Quick and accurate core drilling into brick and masonry up to 202 mm  
 When dry drilling, a dust extractor can be plugged directly onto the drill to increase drilling performance

**Standard Equipment:** Multi-position side handle, PRCD (inline circuit breaker), Connector for water supply, Connector for dust extraction, Heavy duty carrying case

Spindle Thread	1 1/4" Male UNC & 1/2" Female BSP
Power Input	1910 Watts
Power Output	1300 Watt
No Load Speed	0-1000 / 0-2400 / 0-4600 rpm
Max. Drilling Capacity [Concrete]	152 mm
Max. Drilling Capacity [Masonry]	202 mm
Collar Diameter	60 mm
Weight	6.4 kg
Length x Height	550 x 165 mm



**2500 W - Heavy Duty 3 Speed Wet Diamond Drilling Motor D21585**



Ideal tool for heavy duty electrical, plumbing, HVAC or general construction applications when drilling into concrete  
 Integrated water swivel for core drilling into any material up to 250 mm  
 High powered motor delivers best in class performance for frequent Heavy duty drilling  
 3 Mechanical speeds deliver optimum drilling speed

**Standard Equipment:** PRCD (in-line circuit breaker), Water supply hose with integrated tap

Spindle Thread	1 1/4" Male UNC
Power Input	2500 Watts
Power Output	1500 Watt
No Load Speed	500 / 1200 / 2000 rpm
Max. Drilling Capacity [Concrete]	250 mm
Max. Drilling Capacity [Masonry]	300 mm
Collar Diameter	N/A mm
Weight	11.2 kg
Length x Height	570 x 160 mm



**Small Drilling Stand - 53 mm Collar D215821**



Ideal for occasional drilling of large holes into concrete or masonry  
 Small and compact for easy transport to the job site  
 Smooth sliding carriage delivers best in class drilling accuracy  
 Reversible press handle offers tool-free handle set-up

Column Length	680 mm
Collar Diameter	53 mm
Max Drilling Diameter with Water Collector	102 mm
Max Drilling Diameter without Water Collector	152 mm
Inclinable	N/A °
Weight	7 kg

**Medium Drilling Stand with integrated vacuum base - 60 mm Collar D215831**



For heavy duty drilling into masonry and concrete  
 Quick release tool holder allows a quick set up on the jobsite  
 Support brackets increase the rigidity of the column  
 Integrated vacuum base for an even quicker set up (vacuum pump required)

Column Length	995 mm
Collar Diameter	60 mm
Max Drilling Diameter with Water Collector	152 mm
Max Drilling Diameter without Water Collector	172 mm
Inclinable	45 °
Weight	16 kg

**Stand for Drilling Motor (D21585) D215851**



For heavy duty drilling into masonry and concrete with D21585 drilling motor  
 Large base delivers higher stability and improved drilling accuracy  
 Integrated vacuum base for an even quicker set up (vacuum pump required)  
 Support brackets increase the rigidity of the column

Column Length	995 mm
Collar Diameter	N/A mm
Max Drilling Diameter with Water Collector	250 mm
Max Drilling Diameter without Water Collector	300 mm
Inclinable	45 °
Weight	22 kg

**Mechanical Anchoring for Diamond Drill Stands**



Cat. No.	Description	Fits
D215825	Fastening set for concrete	D215821 / D215831 / D215851
D215826	Fastening set for masonry	D215821 / D215831 / D215851
D215827	10 x spare dowels for concrete	D215825
D215828	Spare dowel for masonry	D215826

**Mechanical Anchoring for Diamond Drill Stands**



Cat. No.	Description	Fits
D215837	Vacuum pump	D215831 / D215851
D215838	Spare 3 m vacuum hose	D215837
D215839	Vacuum set (seal and valve)	D215831
D215859	Vacuum set (seal and valve)	D215851

**Diamond Drill Attachments**



Cat. No.	Description	Fits
D215834	Reduction ring 60 to 53 mm collar	D215831
D215854	5 Copper ring for 1 1/4" core bits	D21583K / D21585
D215835	Quick action bracing bracket	D215821 / D215831 / D215851

**250mm Slide Table Wet Tile Saw & Leg Stand D24000 / D24000S**



Stainless steel rail system is intergrated into the tile saw frame, ensuring accurate cuts  
 Cantilevering rail / cart system allows for 610 mm ripping capacity  
 Low weight allows one person to transport and set up saw  
 Plunge feature allows the user to make quick plunge cuts for electrical outlets together with an intergrated 45 / 22.5 degree feature for quick angle cuts

**Standard Equipment:** D240001 leg stand, DT3734 cutting disc, Extension table, Side and rear water collector, Hex key

Power Input	1600 Watts
Wheel Diameter	250 mm
Bore Size	25.4 mm
No Load Speed	4200 rpm
Depth of cut	95 mm
Length x Height	860 x mm
Weight	32 kg

\*Available without leg stand as D24000

**110 mm Hand Held Wet Tile Saw DWC410\***



1300 W motor delivers the cutting power to cut through granite, porcelain, concrete and other stone materials  
 Premium 110 mm diameter continuous rim blade allows the user to cut a variety of different materials from ceramics to concrete up to 34 mm deep - wet or dry  
 Water line and adjustable nozzle feeds water to the blade decreasing dust and increasing blade performance and life  
 Bevels to 45 degrees for quick angled cuts

**Standard Equipment:** 110 mm wet / dry continuous rim diamond blade, Water feed line, Tools for blade change

Power Input	1300 Watts
Power Output	800 Watt
Wheel Diameter	110 mm
Bore Size	20 mm
No Load Speed	13000 rpm
Depth of cut	34 mm
Length x Height	252 x 166 mm
Weight	3.0 kg

**110 mm Hand Held Wet Tile Saw DW862**



1270W Tile Saw for Cutting Marble Granite and other porcelain stones .  
 Target applications are mainly for floor work , can be used with wet kit for wet operation to ensure longer life of the Cutting Blade.  
 No bevel function  
 Wet / Dry Lock ON switch  
 No disc. No wet kit  
 2 m cordset

**Standard Equipment:** 110 mm wet / dry continuous rim diamond blade, Water feed line, Tools for blade change

Power Input	1270 Watts
Wheel Diameter	110 mm
Bore Size	20 mm
No Load Speed	13500 rpm
Depth of cut	34 mm
Length x Height	252 x 166 mm
Weight	3.0 kg



# HAMMERS

## 22mm 2 Mode SDS-Plus Hammer

**NEW** D25032K\* / D25033K/D25033C



Ideal for drilling anchor and fixing holes into concrete and masonry from 4 to 22 mm in diameter  
 Impact-stop for drilling in wood, steel, ceramic and screwdriving applications  
 Large hammer mechanism delivers high performance with low stress to the critical components resulting in better durability  
 Electronic variable speed for total control in any application  
 Safety clutch eliminates sudden high-torque reaction should the bit jam  
 Rounded ergonomic industrial design allows easy and comfortable handling in any application  
 Improved sealing for maximum protection from dust ingress ensuring long tool life

Power Input	710 Watts
Power Output	????? Watts
No Load Speed	0-1550 rpm
Blows per Minute	0-5680 bpm
Impact energy (EPTA 05/2009)	2.0 J
Tool Holder	SDS-Plus
Max. Drilling Capacity [Wood]	30mm
Max. Drilling Capacity [Metal]	13mm
Max. Drilling Capacity [Concrete]	22mm
Max. Drilling Capacity [Core bit]	50mm
Weight	2.5kg
Length	330mm
Height	210mm

**Standard Equipment:** Multi-position side handle, Depth stop, Heavy duty carrying case & Chuck & Adaptor

\* D25032K 2 mode



## 26mm 3 Mode SDS-Plus Hammer

**NEW** D25133K



Ideal for drilling anchor and fixing holes into concrete and masonry from 4 to 26 mm in diameter  
 Rotation-stop for light chiselling applications in brick, soft masonry and occasionally concrete  
 Impact-stop for drilling in wood, steel, ceramic and screwdriving applications  
 Electronic variable speed for total control in any application  
 Safety clutch eliminates sudden high-torque reaction should the bit jam  
 Ergonomic rubber coated back handle design for improved comfort in use  
 Rounded ergonomic industrial design allows easy and comfortable handling in any application

Power Input	800 Watts
Power Output	0 Watts
No Load Speed	0-1500 rpm
Blows per Minute	0-5500 bpm
Impact energy (EPTA 05/2009)	2.6 J
Tool Holder	SDS-Plus
Max. Drilling Capacity [Wood]	30mm
Max. Drilling Capacity [Metal]	13mm
Max. Drilling Capacity [Concrete]	26mm
Max. Drilling Capacity [Core bit]	50mm
Weight	2.6kg
Length	335mm
Height	210mm

**Standard Equipment:** Multi position side handle, Depth stop, Heavy duty carrying case



## 26mm 3 Mode Hammer with QCC

**NEW** D25134K



Ideal for drilling anchor and fixing holes into concrete and masonry from 4 to 26 mm in diameter  
 Rotation-stop for light chiselling applications in brick, soft masonry and occasionally concrete  
 Quick Change Removable Chuck for drilling in wood, steel, ceramic and screwdriving applications  
 Impact-stop for drilling in wood, steel, ceramic and screwdriving applications  
 Large hammer mechanism delivers high performance with low stress to the critical components resulting in better durability  
 Electronic variable speed for total control in any application

Power Input	800 Watts
Power Output	0 Watts
No Load Speed	0-1500 rpm
Blows per Minute	0-5540 bpm
Impact energy (EPTA 05/2009)	2.8 J
Tool Holder	SDS-Plus
Max. Drilling Capacity [Wood]	30 mm
Max. Drilling Capacity [Metal]	13 mm
Max. Drilling Capacity [Concrete]	26 mm
Max. Drilling Capacity [Core bit]	65 mm
Weight	3.0 kg
Length	355mm
Height	210mm

**Standard Equipment:** "Quick Change" 13 mm 3-jaw keyless chuck, Multi-Position side handle, Depth stop, Heavy duty carrying case



## 26mm 3 Mode D Handle Hammer

**NEW** D25262



Ideal for drilling anchor and fixing holes into concrete and masonry from 4 to 26 mm in diameter  
 Rotation-stop for light chiselling applications in brick, soft masonry and occasionally concrete  
 Active Vibration Control system with floating rear handle delivers low vibration and more comfort  
 Impact-stop for drilling in wood, steel, ceramic and screwdriving applications  
 Large hammer mechanism delivers high performance with low stress to the critical components resulting in better durability

Power Input	800 Watts
Power Output	0 Watts
No Load Speed	0-1500 rpm
Blows per Minute	0-5540 bpm
Impact energy (EPTA 05/2009)	2.8 J
Tool Holder	SDS-Plus
Max. Drilling Capacity [Wood]	30 mm
Max. Drilling Capacity [Metal]	13 mm
Max. Drilling Capacity [Concrete]	26 mm
Max. Drilling Capacity [Core bit]	65 mm
Weight	3.0 kg
Length	440 mm
Height	175 mm

**Standard Equipment:** Multi-position side handle, Depth stop, Heavy duty carrying case



## 28mm 3 mode hammer with QCC

**NEW** D25144K



Ideal for drilling anchor and fixing holes into concrete and masonry from 4 to 28 mm in diameter  
 Rotation-stop for light chiselling applications in brick, soft masonry and occasionally concrete  
 Quick Change Removable Chuck for drilling in wood, steel, ceramic and screwdriving applications  
 Impact-stop for drilling in wood, steel, ceramic and screwdriving applications  
 Large hammer mechanism delivers high performance with low stress to the critical components resulting in better durability

Power Input	900 Watts
Power Output	0 Watts
No Load Speed	0-1450 rpm
Blows per Minute	0-5350 bpm
Impact energy (EPTA 05/2009)	3.0 J
Tool Holder	SDS-Plus
Max. Drilling Capacity [Wood]	30 mm
Max. Drilling Capacity [Metal]	13 mm
Max. Drilling Capacity [Concrete]	28 mm
Max. Drilling Capacity [Core bit]	65 mm
Weight	3.1 Kg
Length	360 mm
Height	210 mm

**Standard Equipment:** Multi-position side handle, Depth stop, Heavy duty carrying case, "Quick Change" 13mm keyless chuck



**20mm L-Shape SDS-Plus Rotary Hammer**

**D25052K/ D25052KT\***



Active vibration control with floating back handle delivers extremely low vibration and more comfort  
Ideal for drill anchor and fixing holes into concrete and masonry from 4-20mm in diameter  
Optimised power to weight ratio good power in light weight package  
Electronic variable speed switch for total control

**Standard Equipment:** Multi-position side handle, Depth stop, Heavy duty carrying case

Power Input	650 Watts
Power Output	300 Watt
No Load Speed	0-2300 rpm
Blows per Minute	0-6200 bpm
Impact energy (EPTA 05/2009)	1.9 J
Tool Holder	SDS-Plus
Max. Drilling Capacity [Wood]	30 mm
Max. Drilling Capacity [Metal]	13 mm
Max. Drilling Capacity [Concrete]	20 mm
Max. Drilling Capacity [Core bit]	50 mm
Weight	2.6 kg
Length x Height	295 x 218 mm

\*Available as a kit on request



**26mm L-Shape SDS-Plus Combination Hammer Low Vibration**

**D25323K/ D25313K\***



Ideal for drilling holes and fixing anchors into concrete and masonry from 4 to 26 mm in diameter  
Active Vibration Control system with floating handle delivers extremely low vibration and more comfort  
Rotation-stop for light chiselling applications in soft masonry and occasionally concrete and impact-stop for drilling in wood, steel and screwdriving applications  
Large 22 mm hammer mechanism delivers high performance with low stress to the critical components

**Standard Equipment:** Multi-position side handle, Depth stop, Heavy duty carrying case

Power Input	800 Watts
Power Output	395 Watt
No Load Speed	0-1150 rpm
Blows per Minute	0-4300 bpm
Impact energy (EPTA 05/2009)	2.8 J
Tool Holder	SDS-Plus
Max. Drilling Capacity [Wood]	30 mm
Max. Drilling Capacity [Metal]	13 mm
Max. Drilling Capacity [Concrete]	26 mm
Max. Drilling Capacity [Core bit]	65 mm
Weight	3.4 kg
Length x Height	314 x 225 mm

\*D25313 comes without Anti Vibration features, D25313K



**26mm L-Shape SDS-Plus Combination Hammer with Quick Change Chuck Low Vibration**

**D25324K**



Ideal for drilling holes and fixing anchors into concrete and masonry from 4 to 26 mm in diameter  
Active Vibration Control system with floating handle delivers extremely low vibration and more comfort  
Rotation-stop for light chiselling applications in soft masonry and occasionally concrete  
Impact stop and Quick Change Removable Chuck for precise drilling in wood and steel and screwdriving applications

**Standard Equipment:** Multi position side handle, Quick Adjustment depth stop, Quick Change 13 mm 3 Jaw Keyless Chuck for rotary drilling, Heavy duty carrying case

Power Input	800 Watts
Power Output	395 Watt
No Load Speed	0-1150 rpm
Blows per Minute	0-4300 bpm
Impact energy (EPTA 05/2009)	2.8 J
Tool Holder	SDS-Plus
Max. Drilling Capacity [Wood]	30 mm
Max. Drilling Capacity [Metal]	13 mm
Max. Drilling Capacity [Concrete]	26 mm
Max. Drilling Capacity [Core bit]	65 mm
Weight	3.5 kg
Length x Height	329 x 225 mm



**32mm Heavy Duty SDS-Plus Combination Hammer**

**D25413K**



Active vibration control with floating back handle delivers extremely low vibration and more comfort  
Ideal for drilling large anchor, fixing and through holes in concrete and masonry from 6 to 32 mm in diameter  
Optimised power to weight ratio good power in light weight package  
Large hammer mechanism construction guarantees longer tool life and superior performance

**Standard Equipment:** Multi-position side handle, Heavy duty carrying case

Power Input	1000 Watts
Power Output	680 Watt
No Load Speed	0-820 rpm
Blows per Minute	0-4700 bpm
Impact energy (EPTA 05/2009)	4.2 J
Tool Holder	SDS-Plus
Max. Drilling Capacity [Wood]	40 mm
Max. Drilling Capacity [Metal]	13 mm
Max. Drilling Capacity [Concrete]	6-32 mm
Max. Drilling Capacity [Core bit]	90 mm
Weight	4.2 kg
Length x Height	370 x 250 mm



**32mm Heavy Duty SDS-Plus Combination Hammer**

**D25414KT**



Active vibration control with floating back handle delivers extremely low vibration and more comfort  
Quick change 3 jawed chuck provides speed, precision and flexibility when drilling in wood, ceramic and steel  
Optimised power to weight ratio good power in light weight package  
Rotation-stop for light chiselling applications, render and tile removal

**Standard Equipment:** Quick release SDS+ removable tool holder, Quick release 3 jaw removable chuck, Multi-position side handle, Heavy duty carrying case, Quick release 3 jaw removable chuck, SDS+ Chisel, 2 x SDS+ drill bits, 4 x HSS drill bits, 4 x brad point wood drill bits, 2 x flatwood drill bits, Safety glasses, Gloves

Power Input	1000 Watts
Power Output	650 Watt
No Load Speed	0-820 rpm
Blows per Minute	0-4700 bpm
Impact energy (EPTA 05/2009)	4.2 J
Tool Holder	SDS-Plus
Max. Drilling Capacity [Wood]	40 mm
Max. Drilling Capacity [Metal]	16 mm
Max. Drilling Capacity [Concrete]	6-32 mm
Max. Drilling Capacity [Core bit]	90 mm
Weight	4.3 kg
Length x Height	370 x 250 mm



**32mm Heavy Duty SDS-Plus Combination Hammer**

**D25415K**



Anti-rotation technology reduces power to the unit in a bind up situation  
Active vibration control with floating back handle delivers extremely low vibration and more comfort  
Quick change 3 jawed chuck provides speed, precision and flexibility when drilling in wood, ceramic and steel  
Rotation-stop for light chiselling applications, render and tile removal

**Standard Equipment:** Quick release SDS+ removable tool holder, Quick release 3 jaw removable chuck, Multi-position side handle, Heavy duty carrying case

Power Input	1000 Watts
Power Output	650 Watt
No Load Speed	0-820 rpm
Blows per Minute	0-4700 bpm
Impact energy (EPTA 05/2009)	4.2 J
Tool Holder	SDS-Plus
Max. Drilling Capacity [Wood]	40 mm
Max. Drilling Capacity [Metal]	16 mm
Max. Drilling Capacity [Concrete]	6-32 mm
Max. Drilling Capacity [Core bit]	90 mm
Weight	4.3 kg
Length x Height	370 x 250 mm



**40mm SDS-Max Combination Hammer**

**D25501K**



Ideal for drilling anchor fixing and through holes in concrete and masonry from 12 to 40 mm in diameter. Core drilling up to 90 mm  
Chain drive improves durability and increases efficiency together with an oil filled gearbox to ensure total component lubrication and superior heat dissipation  
Ergonomic, compact and slim line design maximises control and offers easy access to confined spaces  
Excellent power to weight ratio: 8 Joules of impact energy delivered by a 6.1 kg hammer

**Standard Equipment:** Multi-position side handle, Heavy duty carrying case

Power Input	1100 Watts
Power Output	500 Watt
Load Speed	400 rpm
Blows per Minute	2740 bpm
Impact energy (EPTA 05/2009)	8 J
Tool Holder	SDS-Max
Max. Drilling Capacity [Concrete]	40 mm
Max. Drilling Capacity [Breakthrough bit]	55 mm
Max. Drilling Capacity [Core bit]	90 mm
Weight	6.15 kg
Length x Height	457 x 245 mm



**45mm SDS-Max Combination Hammer**

**D25601K**



Ideal for drilling anchor fixing and through holes in concrete and masonry from 12 to 45 mm in diameter. Core drilling up to 100 mm  
Chain drive improves durability and increases efficiency together with an oil filled gearbox to ensure total component lubrication and superior heat dissipation  
Ergonomic, compact and slim line design maximises control and offers easy access to confined spaces  
Active Vibration Control system incorporating a floating rear handle and damped side handle to reduce vibration

**Standard Equipment:** Multi-position anti-vibration side handle, Heavy duty carrying case

Power Input	1250 Watts
Power Output	615 Watt
Load Speed	210-415 rpm
Blows per Minute	1430-2840 bpm
Impact energy (EPTA 05/2009)	8 J
Tool Holder	SDS-Max
Max. Drilling Capacity [Concrete]	45 mm
Max. Drilling Capacity [Breakthrough bit]	65 mm
Max. Drilling Capacity [Core bit]	100 mm
Weight	6.8 kg
Length x Height	477 x 245 mm



**45mm SDS-Max Combination Hammer**

**D25602K**



Ideal for drilling anchor fixing and through holes in concrete and masonry from 12 to 45 mm in diameter. Core drilling up to 100 mm  
Chain drive improves durability and increases efficiency together with an oil filled gearbox to ensure total component lubrication and superior heat dissipation  
Active vibration control system incorporating a floating rear handle and damped side handle to reduce vibration  
2 stage clutch system that allows the user to change the clutch level from low to high torque, to optimise the tool for specific drilling applications  
Rotation-stop for medium-light demolition applications

**Standard Equipment:** Multi-position anti-vibration side handle, Heavy duty carrying case

Power Input	1250 Watts
Power Output	615 Watt
Load Speed	210-415 rpm
Blows per Minute	1430-2840 bpm
Impact energy (EPTA 05/2009)	8 J
Tool Holder	SDS-Max
Max. Drilling Capacity [Concrete]	45 mm
Max. Drilling Capacity [Breakthrough bit]	65 mm
Max. Drilling Capacity [Core bit]	100 mm
Weight	6.9 kg
Length x Height	477 x 245 mm



**45mm SDS-Max Combination Hammer**

**D25603K\***



Ideal for drilling anchor fixing and through holes in concrete and masonry from 12 to 45 mm in diameter. Core drilling up to 100 mm  
Chain drive improves durability and increases efficiency together with an oil filled gearbox to ensure total component lubrication and superior heat dissipation  
Active vibration control system incorporating a floating rear handle and damped side handle to reduce vibration  
2 stage clutch system that allows the user to change the clutch level from low to high torque, to optimise the tool for specific drilling applications  
An anti rotation system detects a loss of tool control, and reacts by instantly cutting the power

**Standard Equipment:** Multi-position anti-vibration side handle, Heavy duty carrying case

Power Input	1250 Watts
Power Output	615 Watt
Load Speed	210-415 rpm
Blows per Minute	1430-2840 bpm
Impact energy (EPTA 05/2009)	8 J
Tool Holder	SDS-Max
Max. Drilling Capacity [Concrete]	45 mm
Max. Drilling Capacity [Breakthrough bit]	65 mm
Max. Drilling Capacity [Core bit]	100 mm
Weight	6.9 kg
Length x Height	477 x 245 mm



\*D25603K includes the UTC Feature, D25603K

**48mm SDS-Max Combination Hammer**

**D25721K**



Ideal for drilling anchor fixing and through holes in concrete and masonry from 12 to 48 mm in diameter. Core drilling up to 115 mm  
Active Vibration Control system incorporating a floating handle delivers extremely low vibration  
Ergonomic, compact and slim line design maximises control and offers easy access to confined spaces  
Electronic variable speed and impact energy control

**Standard Equipment:** Multi-position side handle, Heavy duty carrying case

Power Input	1350 Watts
Power Output	840 Watt
Load Speed	132-265 rpm
Blows per Minute	1225-2450 bpm
Impact energy (EPTA 05/2009)	11 J
Tool Holder	SDS-Max
Max. Drilling Capacity [Concrete]	48 mm
Max. Drilling Capacity [Breakthrough bit]	80 mm
Max. Drilling Capacity [Core bit]	115 mm
Weight	8.7 kg
Length x Height	528 x 268 mm



**48mm SDS-Max Combination Hammer**

**D25722K**



Ideal for drilling anchor fixing and through holes in concrete and masonry from 12 to 48 mm in diameter. Core drilling up to 125 mm  
Active vibration control system incorporating a counterbalance mass and floating handle delivers extremely low vibration  
2 stage clutch system that allows the user to change the clutch level from low to high torque, to optimise the tool for specific drilling applications  
Electronic variable speed and impact energy control

**Standard Equipment:** Multi-position side handle, Heavy duty carrying case

Power Input	1400 Watts
Power Output	840 Watt
Load Speed	137-275 rpm
Blows per Minute	1260-2520 bpm
Impact energy (EPTA 05/2009)	11 J
Tool Holder	SDS-Max
Max. Drilling Capacity [Concrete]	48 mm
Max. Drilling Capacity [Breakthrough bit]	80 mm
Max. Drilling Capacity [Core bit]	125 mm
Weight	9.1 kg
Length x Height	528 x 268 mm



**48mm SDS-Max Combination Hammer**

**D25723K**



Ideal for drilling anchor fixing and through holes in concrete and masonry from 12 to 48 mm in diameter. Core drilling up to 125 mm  
Active vibration control system incorporating a counterbalance mass and floating handle delivers extremely low vibration  
An anti rotation system detects a loss of tool control, and reacts by instantly cutting the power  
2 stage clutch system that allows the user to change the clutch level from low to high torque, to optimise the tool for specific drilling applications

**Standard Equipment:** Multi-position side handle, Heavy duty carrying case

Power Input	1400 Watts
Power Output	840 Watt
Load Speed	137-275 rpm
Blows per Minute	1260-2520 bpm
Impact energy (EPTA 05/2009)	11 J
Tool Holder	SDS-Max
Max. Drilling Capacity [Concrete]	48 mm
Max. Drilling Capacity [Breakthrough bit]	80 mm
Max. Drilling Capacity [Core bit]	125 mm
Weight	9.1 kg
Length x Height	528 x 268 mm



**52mm SDS-Max Combination Hammer**

**D25762K**



Ideal for drilling anchor fixing and through holes in concrete and masonry from 12 to 52 mm in diameter. Core drilling up to 150 mm  
Active vibration control system incorporating a counterbalance mass and floating handle delivers extremely low vibration  
2 stage clutch system that allows the user to change the clutch level from low to high torque, to optimise the tool for specific drilling applications  
Electronic variable speed and impact energy control

**Standard Equipment:** Multi-position side handle, Heavy duty carrying case

Power Input	1500 Watts
Power Output	980 Watt
Load Speed	125-250 rpm
Blows per Minute	1150-2300 bpm
Impact energy (EPTA 05/2009)	15.5 J
Tool Holder	SDS-Max
Max. Drilling Capacity [Concrete]	52 mm
Max. Drilling Capacity [Breakthrough bit]	80 mm
Max. Drilling Capacity [Core bit]	150 mm
Weight	9.9 kg
Length x Height	561 x 272 mm



**52mm SDS-Max Combination Hammer**

**D25763K**



Ideal for drilling anchor fixing and through holes in concrete and masonry from 12 to 52 mm in diameter. Core drilling up to 150 mm  
Active vibration control system incorporating a counterbalance mass and floating handle delivers extremely low vibration  
An anti rotation system detects a loss of tool control, and reacts by instantly cutting the power  
2 stage clutch system that allows the user to change the clutch level from low to high torque, to optimise the tool for specific drilling applications

**Standard Equipment:** Multi-position side handle, Heavy duty carrying case

Power Input	1500 Watts
Power Output	980 Watt
Load Speed	125-250 rpm
Blows per Minute	1150-2300 bpm
Impact energy (EPTA 05/2009)	15.5 J
Tool Holder	SDS-Max
Max. Drilling Capacity [Concrete]	52 mm
Max. Drilling Capacity [Breakthrough bit]	80 mm
Max. Drilling Capacity [Core bit]	150 mm
Weight	9.9 kg
Length x Height	561 x 272 mm



**5 Kilo SDS-Max Dedicated Chipping Hammer**

**D25820K**



Ideal for light demolition, surface preparation or chiseling grooves and channel openings in brick, masonry and light concrete  
Oil filled gearbox ensures total component lubrication and superior heat dissipation  
Excellent power to weight ratio: 8 Joules of impact energy delivered by a 5.8 kg hammer  
Variable chisel locking at 18 different positions to provide the perfect angles for any application

**Standard Equipment:** Multi-position side handle, Heavy duty carrying case

Power Input	1150 Watts
Power Output	500 Watt
Load Speed	N/A rpm
Blows per Minute	2740 bpm
Impact energy (EPTA 05/2009)	8 J
Tool Holder	SDS-Max
Weight	5.8 kg
Length x Height	457 x 245 mm

**4 Kilo Heavy Duty SDS-Plus Dedicated Chipping Hammer**

**D25430K**



Active vibration control with floating back handle delivers extremely low vibration and more comfort  
Rotation-stop for light chiselling applications, render and tile removal  
Optimised power to weight ratio good power in light weight package  
Large hammer mechanism construction guarantees longer tool life and superior performance

**Standard Equipment:** Multi-position side handle, Heavy duty carrying case

Power Input	1000 Watts
Power Output	650 Watt
No Load Speed	N/A rpm
Blows per Minute	0-4700 bpm
Impact energy (EPTA 05/2009)	4.2 J
Tool Holder	SDS-Plus
Weight	4.0 kg
Length x Height	370 x 250 mm



**6 Kilo SDS-Max Dedicated Chipping Hammer**

**D25831K**



Ideal for light demolition, surface preparation or chiseling grooves and channel openings in brick, masonry and light concrete  
Oil filled gearbox to ensure total component lubrication and superior heat dissipation  
Ergonomic, compact and slim line design maximises control and offers easy access to confined spaces  
Electronic variable speed and impact energy control

**Standard Equipment:** Multi-position side handle, 1 point chisel, Heavy duty carrying case

Power Input	1250 Watts
Power Output	615 Watt
Blows per Minute	1430-2840 bpm
Impact energy (EPTA 05/2009)	8 J
Tool Holder	SDS-Max
Weight	6.1 kg
Length x Height	477 x 245 mm



**7 Kilo SDS-Max Dedicated Demolition Hammer**

**D25871K**



Ideal for demolition and surface preparation in brick, masonry and concrete  
Active Vibration Control system incorporating a counterbalance mass and floating handle delivers extremely low vibration  
Variable chisel locking at 24 positions to provide the perfect approach for all applications  
Electronic variable impact energy/speed for total control

**Standard Equipment:** Multi-position side handle, 1 point chisel, Heavy duty carrying case

Power Input	1400 Watts
Power Output	840 Watt
Blows per Minute	1260-2520 bpm
Impact energy (EPTA 05/2009)	11 J
Tool Holder	SDS-Max
Weight	8.0 kg
Length x Height	528 x 268 mm



**10 Kilo SDS-Max Demolition Hammer**

**D25899K**



Powerful and durable 1500 Watt motor delivers outstanding concrete breaking performance  
In line design for better handling and quick change chisel adjustment allows fast orientation of the chisel through 12 preset positions  
Magnesium housings ensure maximum durability and minimum weight  
Compact, streamlined design allows access in confined areas

**Standard Equipment:** Multi position side handle, Heavy duty carrying case

Power Input	1500 Watts
Power Output	750 Watt
Blows per Minute	2040 bpm
Impact energy (EPTA 05/2009)	17.9 J
Tool Holder	SDS-Max
Weight	9.9 kg
Length x Height	650 x 250 mm



**10 Kilo SDS-Max Demolition Hammer**

**D25901K**



Powerful and durable 1500 Watt motor delivers outstanding concrete breaking performance  
Active Vibration Control system incorporating a counterbalance mass and floating handle delivers extremely low vibration  
In line design for better handling and quick change chisel adjustment allows fast orientation of the chisel through 12 preset positions  
Magnesium housings ensure maximum durability and minimum weight

**Standard Equipment:** Multi position side handle, Chisel, Heavy duty carrying case

Power Input	1500 Watts
Power Output	750 Watt
Blows per Minute	1020-2040 bpm
Impact energy (EPTA 05/2009)	25 J
Tool Holder	SDS-Max
Weight	10.5 kg
Length x Height	690 x 250 mm



**12 Kilo 19mm HEX Demolition Hammer**

**D25941K**



Powerful and durable 1600 Watt motor delivers outstanding concrete breaking performance  
Active Vibration Control system incorporating a counterbalance mass and floating handle delivers extremely low vibration  
In line design for better handling and quick change chisel adjustment allows fast orientation of the chisel through 12 preset positions  
Magnesium housings ensure maximum durability and minimum weight

**Standard Equipment:** Multi position side handle, Pointed chisel, Heavy duty carrying case

Power Input	1600 Watts
Power Output	790 Watt
Blows per Minute	1620 bpm
Impact energy (EPTA 05/2009)	22.5 J
Tool Holder	19mm Hex
Weight	13.8 kg
Length x Height	750 x 250 mm



**28mm HEX Demolition Breaker**

**D25960K**



Highest productivity due to an optimum balance of power, impact energy and vibration  
Lowest vibration in the 16kg class ensures the highest trigger time  
50% longer service intervals than the nearest competitor for lower running costs and less down time  
Robust and proven design provides the longest lasting 16kg breaker

**Standard Equipment:** Pointed chisel, Multi position side handle, Heavy duty carrying case

Power Input	1600 Watts
Power Output	1000 Watt
Blows per Minute	1450 bpm
Impact energy (EPTA 05/2009)	35 J
Tool Holder	28mm HEX
Weight	18.4 kg
Length x Height	795 x 260 mm



**30mm HEX Demolition Breaker**

**D25961K**



Highest productivity due to an optimum balance of power, impact energy and vibration  
Lowest vibration in the 16kg class ensures the highest trigger time  
50% longer service intervals than the nearest competitor for lower running costs and less down time  
Robust and proven design provides the longest lasting 16kg breaker

**Standard Equipment:** Pointed chisel, Multi position side handle, Heavy duty carrying case

Power Input	1600 Watts
Power Output	1000 Watt
Blows per Minute	1450 bpm
Impact energy (EPTA 05/2009)	35 J
Tool Holder	30mm HEX
Weight	16.9 kg
Length x Height	760 x 260 mm



**30 Kilo 28mm HEX Pavement Breaker**

**D25980/ D25980K\***



Large oversize mechanism delivers extreme durability and excellent breaking performance  
2100 Watt motor delivers outstanding efficiency and durability  
Active Vibration Control offers safer, more comfortable use and more productivity  
Suspended Handle System absorbs the rebound and, working with the AVC, delivers the lowest vibration on the market  
Optimized motor and hammer mechanism deliver best performance on the market  
Heavy duty electronic module for constant power under load

Power Input	2100 Watts
Power Output	1200 Watt
Blows per Minute	900 bpm
Impact energy (EPTA 05/2009)	52 J
Tool Holder	28 mm Hex
Weight	31 kg
Length x Height	780 x 620 mm



\*K version comes with trolley (D259801) on request



**36V Li-Ion Dedicated Cordless Hammer with Integrated Dust Extraction System** **DCH365M2**

Ideal for drilling anchors and fixing holes into concrete, brick and masonry from 4mm to 26mm  
 Rotation stop mode for light chiselling in plaster, tiles and render and impact stop mode for rotary only drilling in wood and metal  
 Quick release SDS-Plus toolholder and keyless chuck supplied for easy switching between hammer / rotary hammer and rotary only applications  
 Includes D25302DH Dust Extraction System with quick release for easy tool free assembly  
 Best in class vibration, 8.5m/s<sup>2</sup> reduces user fatigue and maximises operating periods  
 36 Volt Lithium Ion battery, delivers high performance, long life and maximum runtime  
**Standard Equipment:** Integrated D25302DH dust extraction system with Hepa filter, 2 x 4.0Ah Li-Ion battery packs, Charger, Side handle with dust extraction adaptation, Quick release SDS plus toolholder, Quick release 13mm 3 jaw chuck, Heavy duty kitbox

Battery	Li-Ion
Battery Capacity	4.0 Ah
Power Output	600 Watt
No Load Speed	0-1100 rpm
Impact energy (EPTA 05/2009)	2.3 J
Blows per Minute	0-4500 bpm
Tool Holder	SDS-Plus
Max. Drilling Capacity [Wood]	30 mm
Max. Drilling Capacity [Metal]	13 mm
Max. Drilling Capacity [Concrete]	26 mm
Weight	5.8 kg
Length x Height	502 x 360 mm
Hand/Arm Vibration - Drilling	7.1 m/s <sup>2</sup>



**26mm L-Shape SDS-Plus Combination Hammer Integrated Dust Extraction Low Vibration** **D25325K**



Ideal for drilling holes and fixing anchors into concrete and masonry from 4 to 26 mm in diameter, and up to 16 mm with Dust Extraction System  
 Rotation-stop for light chiselling in soft masonry and occasionally concrete and Impact-stop with Quick Change Removal Chuck for precise drilling in wood, steel and screwdriving applications  
 Active Vibration Control system with floating handle delivers extremely low vibration  
 Hepa filter improves dust filtering ensuring minimum dust levels emitted into atmosphere

**Standard Equipment:** Integrated dust extraction system with Hepa filter, Multi position side handle, Quick adjustment depth stop, Quick change 13 mm 3 jaw keyless chuck for rotary drilling, Heavy duty carrying case

Power Input	800 Watts
Power Output	395 Watt
No Load Speed	0-1150 rpm
Blows per Minute	0-4300 bpm
Impact energy (EPTA 05/2009)	2.8 J
Tool Holder	SDS-Plus
Max. Drilling Capacity [Wood]	30 mm
Max. Drilling Capacity [Metal]	13 mm
Max. Drilling Capacity [Concrete]	26 mm
Max. Drilling Capacity [Core bit]	65 mm
Weight	5.1 kg
Length x Height	462 x 291 mm



\* Available as bare unit on request

**36V Cordless Dust Extraction System** **D25302DH**



Ideal for dust free drilling up to 16 mm in diameter with any DeWalt 36V SDS-Plus hammer  
 Powered by an independent motor maintaining maximum hammer performance with no decrease in durability  
 High quality washable HEPA filter capable of achieving 99.5% efficiency with dust particles as small as 0.3 microns  
 Quick release for easy tool free assembly



\* Available as bare unit on request

**Dust Extraction System** **D25300DH**




Ideal for dust free drilling with D25323/D25324 2 kg L-Shape Hammers up to 16 mm in diameter  
 The most durable dust extraction system for SDS-plus hammers  
 Powered by own independent motor ensuring consistent high tool performance  
 Automatic 2 sec. switch off time delay to ensure dust from drilled hole is completely cleaned  
 Hepa filter improves dust filtering ensuring minimum dust levels emitted into atmosphere



\* Available as bare unit on request

**SDS-Plus Dust Extraction Telescope** **D25301D**



For use with most DEWALT corded and cordless SDS-Plus hammers  
 Ideal for dust free drilling up to 16 mm in diameter  
 Quick-fit system for easy tool free assembly and release  
 Tough and versatile to meet the needs of the most demanding applications with a compact design to maintain visibility and extremely light weight to minimise user fatigue  
 150 cm heavy duty rubber hose for maximum reach

**Standard Equipment:** Side handle with dust extraction adaptation, Telescope and extraction head, Rubber hose, 43mm adaptor, Carton box



**800W-CORDED VARIABLE SPEED BLOWER** **DWB800**



Voltage	220-240V
Speed	Variable
RPM	0-16000 Watts
Power Input	800W
Frequency	50/60Hz
Flow	4,5 m <sup>3</sup> /min
Suction*	2,5 m <sup>3</sup> /min
Pressure*	506
Vacuum Option	Yes

800W - Most Powerful Motor  
 Variable Speed  
 Highest Air Flow in this Category





**38L Construction Dust Extractor M Class**

**DWV902M**



M Classified to meet EU legislation  
 Innovative dual filter cleaning system maintains performance during tough construction applications  
 Constant suction power even with the finest concrete and wood dust  
 Each filter is automatically cleaned every 15 seconds reducing filter clogging and delivering constant air flow  
**Standard Equipment:** 4.6m x 32mm extraction hose, 35mm AirLock adapter, Stepped Rubber AirLock adapter, Dust bag

Power Input	1400 Watts
Power Take Off Rating: Europe	2200 Watts
Max. Airflow	4080 l/min
Capacity	35 ltr
Wet/Dry Capacity	35 ltr
Weight	15 kg
Height x Length	695 x 520 mm
Power Take Off Rating	2200 Watts



**30l Standard Dust Extractor - L Class**

**DWV900L**



L Classified to meet EU legislation  
 Innovative dual filter cleaning system maintains performance during tough construction applications  
 Constant suction power even with the finest concrete and wood dust  
 A filter is automatically cleaned every 30 seconds reducing filter clogging and delivering constant air flow  
 Wet and dry pick up  
 Built-in power take off socket allows power tool connection for automatic switching of the vacuum system  
 Automatic start and stop control when the power tool is operated. The machine continues to run for an extra 15 seconds to allow all dust to be cleared from system

Power Input	1400 Watts
Max. Airflow	4080 l/min
Capacity	30 ltr
Wet/Dry Capacity	17.5 ltr
Weight	9.5 kg
Height	500 mm
Power Take Off Rating: Europe	2200 Watts
Sound Pressure	79 dB(A)
Sound Pressure Uncertainty	3 dB(A)
Sound Power	93 dB(A)
Sound Power Uncertainty	3 dB(A)



**Standard Equipment:** 2.0m x 32mm extraction hose, 35mm AirLock adapter, Dust bag

**Chiselling Dust Extraction System**

**DWH051K**



Compatible with all DeWalt SDS-Max / 19mm HEX combination hammers and breakers  
 Accepts any DeWalt pointed, flat chisels and bushing tools and can be connected to any professional dust extractor  
 Quick release and tool free connection  
 3x different length flexible nozzles for optimum dust extraction

**Standard Equipment:** Heavy duty carrying case, 3x interchangeable nozzles, 2x tool holder adaptors



**Demolition Dust Extraction System**

**DWH052K**



Compatible with all DeWalt demolition hammers and breakers  
 Accepts any DeWalt pointed, flat chisels and bushing tools up to 32mm wide and can be connected to any professional dust extractor  
 Fully adjustable, quick release and tool free connection  
 Impact resistant dust nozzle and flexible hose allows for maximum durability and long life

**Standard Equipment:** Heavy duty carrying case



**Drilling Dust Extraction System & Hole Cleaning**

**DWH050K**



Ideal for dust free drilling up to 52mm in diameter and unlimited depth  
 Compatible with all professional dust extractors  
 Durable rubber seal allows for adhesion to most masonry surfaces  
 Interchangeable drilling heads for optimum dust removal

**Standard Equipment:** Heavy duty carrying case, 2x interchangeable drilling heads, 2x hole cleaning nozzles



**TSTAK Attachment**

**DWV9500-XJ**



Direct attachment of T Stak kitboxes for DWV901/DWV900

**Dust Connection System Woodworking Kit**

**DWV9220**



Direct locking to compatible DeWalt tools.  
 Twist lock action enables user to quickly move hose from tool to tool whilst retaining positive lock.  
 Swivels 360 to prevent hose becoming twisted during use.



**Dust Connection System Construction Kit**

**DWV9210**



Twist lock action enables user to quickly move hose from tool to tool whilst retaining positive lock.  
 Swivels 360 to prevent hose becoming twisted during use.





**METAL WORKING**

**800W - 100mm Angle Grinder**

**DWE4001**



Small girth allows comfortable gripping resulting in superior ergonomics  
 The low profile gear case allows access in confined areas  
 Abrasion protected motor for increased durability  
 Independent box and spring brush holder design increases brush life  
 Fully leaded stator windings for increased motor durability

Power Input	800 Watts
No Load Speed	12000 rpm
Spindle Thread	M10
Switch Type	Toggle Switch

**800W - 100mm Angle Grinder**

**DWE4002**



Small girth allows comfortable gripping resulting in superior ergonomics  
 The low profile gear case allows access in confined areas  
 Abrasion protected motor for increased durability  
 Independent box and spring brush holder design increases brush life  
 Fully leaded stator windings for increased motor durability

Power Input	800 Watts
No Load Speed	12000 rpm
Max. Disc Diameter	100 mm
Spindle Thread	M10
Weight	1.72 kg

**730W-115mm Angle grinder**

**DWE4010/ DWE4010T**



Slim Girth enables easy and comfortable Grip thereby providing superior Ergonomics in this category  
 Lowest Temperature rise resulting in an increased motor life rendering the tool better durability  
 Cut Off Brushes to prolong Motor Life  
 Redesigned Gear Case enables easy access to confined areas during working.

Power Input	730 Watts
No Load Speed	11000 rpm
Max. Disc Diameter	115 mm
Spindle Thread	M10

Available in toggle and Slide Switch

**900W - 115mm Slide Switch Small Angle Grinder**

**DWE4150**



Small girth allows comfortable gripping resulting in superior ergonomics  
 Independent box and spring brush holder design increases brush life  
 The low profile gear case allows access in confined areas  
 Fully leaded stator windings for increased motor durability

**Standard Equipment:** Protective guard, Multi-position side handle, Inner and outer disc flange, Spanner

Power Input	900 Watts
No Load Speed	11800 rpm
Max. Disc Diameter	115 mm
Spindle Thread	M14
Weight	2.0 kg
Length x Height	270 x 80 mm



**900W - 115mm Paddle Switch Small Angle Grinder**

**DWE4120**



A non locking paddle switch ensures the grinder switches off automatically when the unit is released  
 Independent box and spring brush holder design increases brush life  
 Small girth allows user to maintain a comfortable grip, resulting in superior ergonomics  
 The low profile gear case allows access to confined areas

**Standard Equipment:** 115mm Protective guard, Inner and outer disc flange, Spanner, Multi positioned side handle

Power Input	900 Watts
No Load Speed	11800 rpm
Max. Disc Diameter	115 mm
Spindle Thread	M14
Weight	2.05 kg
Length x Height	270 x 80 mm



**1010 W - 125 mm Small Angle Grinder** **NEW** DWE4205



Dust ejection system removes majority of debris from the air which passes over the motor, preventing abrasion and tracking  
 Small girth allow comfortable gripping resulting in superior ergonomics  
 The low profile gear case allows access in confined areas  
 Anti vibration side handle to improve user comfort  
 Anti lock flange prevents flanges from permanently locking up and locking the disc on  
 New guard design allows guard fitment, adjustment or removal without the use of tools, for increased flexibility  
 Fully leaded stator windings for increased motor durability  
 Pop off brushes protect the armature from damage at the end of brush life resulting in greater motor durability

Power Input	1010 Watts
No Load Speed	11000 rpm
Max. Disc Diameter	125 mm
Spindle Thread	M14
Weight	2.2kg
Length	285 mm
Height	80mm

**Standard Equipment:** Protective keyless guard, Multi-position anti vibration side handle, Inner and outer disc flange, Spanner



**1200 W - 115 mm Slide Switch Small Angle Grinder** **NEW** DWE4216



Dust ejection system removes majority of debris from the air which passes over the motor, preventing abrasion and tracking  
 Small girth allow comfortable gripping resulting in superior ergonomics  
 The low profile gear case allows access in confined areas  
 Anti vibration side handle to improve user comfort  
 New guard design allows guard fitment, adjustment or removal without the use of tools, for increased flexibility  
 Fully leaded stator windings for increased motor durability  
 Pop off brushes protect the armature from damage at the end of brush life resulting in greater motor durability

Power Input	1200 Watts
No Load Speed	11000 rpm
Max. Disc Diameter	125 mm
Spindle Thread	M14
Weight	2.2kg
Length	285 mm
Height	80mm

**Standard Equipment:** Protective keyless guard, Multi-position anti vibration side handle, Inner and outer disc flange, Spanner



**1200 W - 115 mm Small Angle Grinder** **NEW** DWE4212



Electro-mechanical clutch reduces the "kickback" transmitted to the operator if the cutting disc jams  
 No volt release switch will prevent the unit starting when plugged in, even if the switch is in the on position. Switch must be consciously reset before power is delivered  
 Overload protection will prevent the unit over heating by shutting the unit off until the unit has cooled down

Power Input	1200 Watts
No Load Speed	11500 rpm
Max. Disc Diameter	115 mm
Spindle Thread	M14
Weight	2.2 kg
Length x Height	285 x 80 mm

**Standard Equipment:** Protective keyless guard, Multi-position anti vibration side handle, Inner and outer disc flanges, Spanner



**1700 W - 115 mm Small Angle Grinder** D28114



Electro-mechanical clutch reduces the "kickback" transmitted to the operator if the cutting disc jams  
 No volt release switch will prevent the unit starting when plugged in, even if the switch is in the on position. Switch must be consciously reset before power is delivered

Power	1700 MWO
No Load Speed	1100 rpm
Max. Disc Diameter	115 mm
Spindle Thread	M14
Weight	2.5 kg
Length x Height	315 x 90 mm

**Standard Equipment:** Protective keyless guard, Multi position anti vibration side handle, Inner and outer disc flanges, Spanner



**900W - 125mm Slide Switch Small Angle Grinder** DWE4151



Small girth allows comfortable gripping resulting in superior ergonomics  
 Independant box and spring brush holder design increases brush life  
 The low profile gear case allows access in confined areas  
 Fully leaded stator windings for increased motor durability

Power Input	900 Watts
No Load Speed	11800 rpm
Max. Disc Diameter	125 mm
Spindle Thread	M14
Weight	2.05 kg
Length x Height	270 x 80 mm

**Standard Equipment:** Protective guard, Multi-position side handle, Inner and outer disc flange, Spanner



**1200W 125mm Small Angle Grinder** **NEW** DWE4215



Dust ejection system removes majority of debris from the air which passes over the motor, preventing abrasion and tracking  
 Small girth allows user to maintain a comfortable grip, resulting in superior ergonomics  
 Anti-vibration side handle to improve user comfort  
 The low profile gear case allows access to confined areas  
 Fully leaded stator windings for increased motor durability  
 Pop off brushes protect the armature from damage at the end of brush life resulting in greater motor durability

Power Input	1200 Watts
No Load Speed	11000 rpm
Max. Disc Diameter	125 mm
Spindle Thread	M14
Weight	2.2 kg
Length	285 mm
Height	80 mm

**Standard Equipment:** 115mm Protective guard, 125mm Protective guard, Inner and outer disc flange, Spanner, Multi positioned anti vibration side handle



**1400 W - 125 mm Small Angle Grinder** D28135/ D28135K\*



Dust ejection system removes majority of debris from the air which passes over the motor, preventing abrasion and tracking  
 Anti lock flange prevents flanges from permanently locking up and locking the disc on  
 Abrasion protected motor for increased durability  
 New guard design allows guard fitment, adjustment or removal without the use of tools, for increased flexibility

Power Input	1400 Watts
No Load Speed	10000 rpm
Max. Disc Diameter	125 mm
Spindle Thread	M14
Weight	2.5 kg
Length x Height	300 x 80 mm

**Standard Equipment:** Protective keyless guard, Multi-position anti vibration side handle, Inner and outer disc flanges, Spanner



\*K version comes with kitbox, D28135 on request

**1250 W - 125 mm Small Angle Grinder** D28065



Dust ejection system removes majority of debris from the air which passes over the motor, preventing abrasion and tracking  
 Ergonomic main handle with rubber grip allows for maximum comfort when grinding for long periods of time  
 Abrasion protected motor for increased durability  
 New guard design allows guard fitment, adjustment or removal without the use of tools, for increased flexibility

Power Input	1250 Watts
Power Output	680 Watt
No Load Speed	9000 rpm
Max. Disc Diameter	125 mm
Spindle Thread	M14
Weight	2.6 kg
Length x Height	385 x 110 mm

**Standard Equipment:** Protective keyless guard, Multi-position anti vibration side handle, Inner and outer disc flanges, Spanner



**1400 W - 125 mm Medium Angle Grinder** DW831



Large diameter high power motor for superior performance  
 High temperature resin coated field for increased durability  
 Special air channels designed into field case to optimise motor cooling  
 Spindle lock for quick wheel changes

Power Input	1400 Watts
Power Output	900 Watt
No Load Speed	10000 rpm
Max. Disc Diameter	125 mm
Spindle Thread	M14
Weight	3.1 kg
Length x Height	385 x 115 mm

**Standard Equipment:** Protective guard, Side handle, Inner and outer disc flanges, Spanner



**125mm Mortar Raking Kit** DWE46101



Powerful 1100W motor and shroud allow collection of harmful dust during mortar applications  
 Direct Airlock Compatability allows quick, secure connection to extraction hose  
 Durable steel construction ensures maximum durability in tough site conditions  
 Pivoting side door allows mortar removal into internal corners

Power Input	1100 Watts
No Load Speed	10000 rpm
Max. Disc Diameter	125 mm
Spindle Thread	M14
Weight	1.8 kg
Length x Height	320 x 110 mm

**Standard Equipment:** Protective guard, Multi-position side handle, Inner and outer disc flange, Spanner, DWV9000 AirLock Adapter, 125mm DeWALT Mortar Racking 'Sandwich' Wheel



\*Available as bare unit on request

**115-125mm Surface Grinding Shroud**

**DWE46150**



Allows collection of harmful dust during surface grinding applications  
Attaches directly to 115, 125mm DeWALT Grinders with keyless clamp  
Sliding section allows access to corners and surfacing to edge  
AIRLOCK Compatible for quick, locking attachment to vac hose

**180mm Surface Grinding Shroud**

**DWE46170**



Allows collection of harmful dust during surface grinding applications  
Pivoting front section allows access to corners and surfacing to edge  
Attaches directly to 180mm DeWALT Grinders with keyless clamp  
AIRLOCK Compatible for quick, locking attachment to vac hose



**1400 W - 150 mm Small Angle Grinder**

**D28141**



Dust ejection system removes majority of debris from the air which passes over the motor, preventing abrasion and tracking  
Anti lock flange prevents flanges from permanently locking up and locking the disc on  
Abrasion protected motor for increased durability  
New guard design allows guard fitment, adjustment or removal without the use of tools, for increased flexibility

Power Input	1400W Watts
No Load Speed	9000 rpm
Max. Disc Diameter	150 mm
Spindle Thread	M14
Weight	2.6 kg
Length x Height	300 x 80 mm

**Standard Equipment:** Protective keyless guard, Multi-position anti vibration side handle, Inner and outer disc flanges, Spanner



**2400W - 180mm Heavy Duty Large Angle grinder**

**DWE4557**



Dust Ejection System protects from abrasion damage increasing the life of the tool  
Anti vibration side handle  
Quick adjustment tool free guard  
Fully leaded stator windings for increased motor durability

Power Input	2400 Watts
No Load Speed	8500 rpm
Max. Disc Diameter	180 mm
Spindle Thread	M14
Weight	5.5 kg
Length x Height	520 x 145 mm

**Standard Equipment:** Protective tool free guard, Anti vibration side handle, Inner and outer flange set, Spanner



**2600W - 180mm Heavy Duty Large Angle grinder**

**DWE4597**



Dust Ejection System protects from abrasion damage increasing the life of the tool  
Overload protection will prevent the motor overheating by shutting off the unit until the motor cools down  
Soft start to limit start-up current and reduce kick back  
Torque limiting clutch reduces the maximum torque reaction transmitted to the operator if the disc jams  
No volt release switch prevents the unit starting when plugged in, even if the switch is lock on. Switch must be consciously reset before power is delivered  
Anti vibration side handle provides the user with greater comfort during operation

**Standard Equipment:** Protective keyless guard, Anti vibration side handle, Inner and outer disc flanges, Spanner

Power Input	2600 Watts
No Load Speed	8500 rpm
Max. Disc Diameter	180 mm
Spindle Thread	M14
Weight	5.6 kg
Length x Height	520 x 151 mm



**2200 W - 230 mm Angle Grinder**

**NEW DWE492**



Abrasion protected motor for increased durability  
Two position side handle allows the user to optimise handle position to give maximum comfort  
Spindle lock for quick wheel changes  
Brush window allows quick brush replacement

Power Input	2200 Watts
No Load Speed	6500 rpm
Max. Disc Diameter	230 mm
Spindle Thread	M14
Weight	5.1 kg
Length x Height	484 x 112 mm

**Standard Equipment:** Protective guard, Side handle, Inner and outer disc flanges, Spanner

**2200 W - 180 mm Angle Grinder**

**NEW DWE493**



Abrasion protected motor for increased durability  
Two position side handle allows the user to optimise handle position to give maximum comfort  
Spindle lock for quick wheel changes  
Brush window allows quick brush replacement

**Standard Equipment:** Protective guard, Side handle, Inner and outer disc flanges, Spanner

Power Input	2200 Watts
No Load Speed	8500 rpm
Max. Disc Diameter	180 mm
Spindle Thread	M14
Weight	5.1 kg
Length x Height	484 x 112 mm

**2400W - 230mm Heavy Duty Large Angle Grinder**

**DWE4559**



Dust Ejection System protects from abrasion damage increasing the life of the tool  
Anti vibration side handle  
Quick adjustment tool free guard  
Fully leaded stator windings for increased motor durability

**Standard Equipment:** Protective tool free guard, Anti vibration side handle, Inner and outer flange set, Spanner

Power Input	2400 Watts
No Load Speed	6500 rpm
Max. Disc Diameter	230 mm
Spindle Thread	M14
Weight	5.7 kg
Length x Height	520 x 145 mm



**2600W - 230mm Heavy Duty Large Angle Grinder**

**DWE4579**



Dust Ejection System protects from abrasion damage increasing the life of the tool  
Overload protection will prevent the motor overheating by shutting off the unit until the motor cools down  
Soft start to limit start-up current and reduce kick back  
Torque limiting clutch reduces the maximum torque reaction transmitted to the operator if the disc jams

**Standard Equipment:** Protective keyless guard, Anti vibration side handle, Inner and outer disc flanges, Spanner

Power Input	2600 Watts
No Load Speed	6500 rpm
Max. Disc Diameter	230 mm
Spindle Thread	M14
Weight	5.9 kg
Length x Height	520 x 145 mm



**450W 6mm Slide Switch Die Grinder**

**DWE4887N**



Long nose with rubber grip improves access, comfort and control  
Anti-lock collet ensures that all attachments are easily removable once the nut is loosened  
Powerful 450W motor allows maximum performance in demanding applications  
Slim, ergonomic design results in user comfort allowing strain free grinding  
Low operating temperature increases user comfort in prolonged applications  
Ergonomic, lock-on slide switch for maximum flexibility  
Easy service, 1 screw design

**Standard Equipment:** 6 mm collet, Spanner

Power Input	450 Watts
Power Output	0 Watts
No Load Speed	25000 rpm
Collet Size	6 mm
Weight	1.6 kg
Length	356 mm
Spindle lock	No



**355mm Abrasive Chop Saw**

**D28720**



Horizontal handle for superior ergonomics and less user fatigue  
Quick release clamp results in less time in changing the work piece  
High power abrasion protected motor delivers high overload capabilities for greater durability  
Spindle lock for quick and easy wheel change  
Adjustable spark guard allows user to control the direction of the sparks coming from the machine

**Standard Equipment:** Hex key

Power Input	2300 Watts
Power Output	1350 Watt
No Load Speed	3800 rpm
Wheel Diameter	355 mm
Max. Cutting Capacity at 90° [Square Profile]	120 x 120 mm
Max. Cutting Capacity at 90° [Rectangular Profile]	115 x 130 mm
Max. Cutting Capacity at 90° [L-Shape Profile]	137 x 137 mm
Max. Cutting Capacity at 90° [Rounded Profile]	130 mm
Max. Cutting Capacity at 45° [Square Profile]	107 x 107 mm
Max. Cutting Capacity at 45° [Rectangular Profile]	115 x 107 mm
Max. Cutting Capacity at 45° [L-Shape Profile]	115 x 115 mm
Max. Cutting Capacity at 45° [Rounded Profile]	115 mm
Weight	17 kg
Length x Height	470 x 410 mm

**2200 Watt 355 mm High Performance Chopsaw**

**D28715**



Keyless blade clamp allows quick, hassle free blade change  
 Electronic soft start to limit start-up current and kick back reaction  
 High power abrasion protected motor delivers high overload capabilities for greater durability  
 Keyless mitre adjustments for quick and simple operations

**Standard Equipment:** Metal cutting disc, Hex key, Keyless blade clamp

Power Input	2200 Watts
Power Output	1350 Watt
No Load Speed	4000 rpm
Wheel Diameter	355x2.5 mm
Max. Cutting Capacity at 90° [Square Profile]	120x120 mm
Max. Cutting Capacity at 90° [Rectangular Profile]	100x200 mm
Max. Cutting Capacity at 90° [L-Shape Profile]	140x140 mm
Max. Cutting Capacity at 90° [Rounded Profile]	130 mm
Max. Cutting Capacity at 45° [Square Profile]	113x113 mm
Max. Cutting Capacity at 45° [Rectangular Profile]	100x140 mm
Max. Cutting Capacity at 45° [L-Shape Profile]	120x120 mm
Max. Cutting Capacity at 45° [Rounded Profile]	130 mm
Weight	18 kg
Length x Height	520 x 435 mm



**150mm & 180mm variable speed polisher**

**DWP849X**



Power Input	1250 Watts
No Load Speed	0-600/3500 rpm
Max. Disc Diameter	150 & 180 & 230 mm
Spindle Thread	M14
Weight	3.0 kg
Length x Height	480 x 135 mm


Rubber overmoulded gearcase allows the user to grip the gearcase for greater comfort

Variable speed trigger allows the user to control the speed of the unit by adjusting the force applied to the switch

Large variable speed dial allows the user to easily change their speed to suit specific applications

Replaceable wool ingestion shields prevent wool from being sucked into the unit and blocking the tool

**Standard Equipment:** 180mm Velcro packing pad, 180mm Velcro wool bonnet, Bail side handle, Horizontal side handle

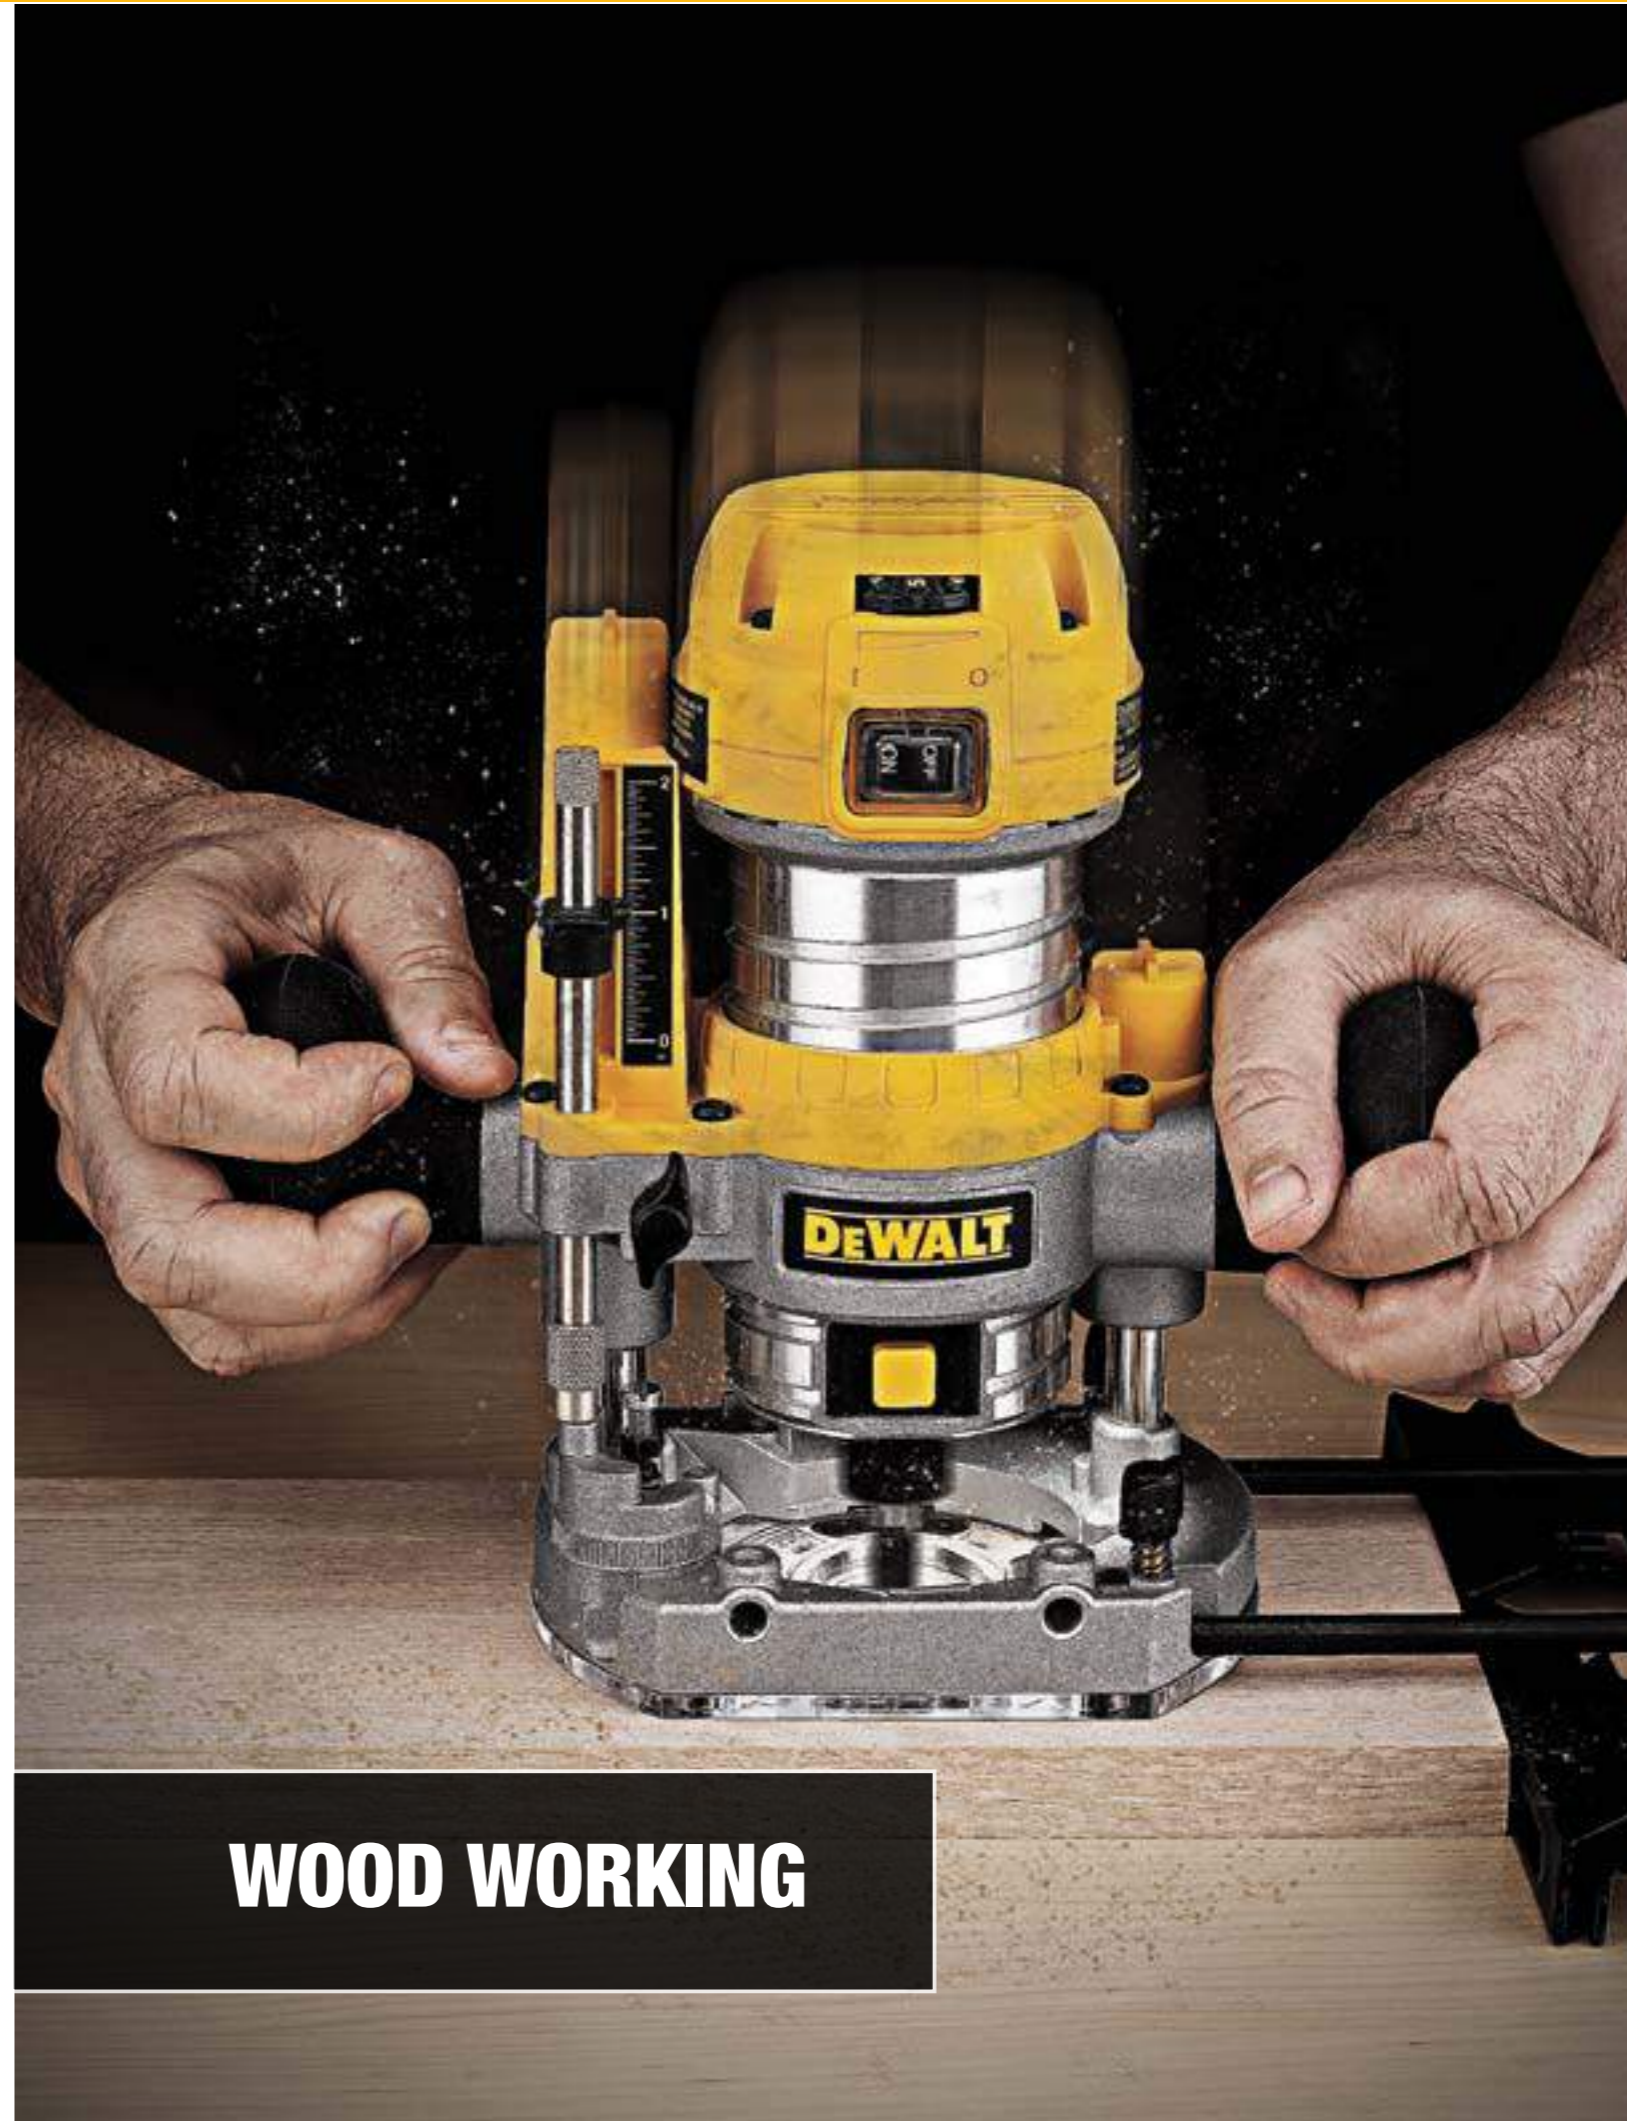

**WOOD WORKING**

**900W 8mm ( 1/4" ) Premium Plunge & Fixed Base Router Combination**

**D26204K**



Full wave electronic speed control with feedback ensures the selected speed is maintained under any load for a consistent finish in all grades of timber, aluminium and plastics  
Variable speed control 16,000 to 27,000 which enables the router bit to be optimised for application  
Compact, light weight design that increase ease of use and user comfort  
Aluminium motor housing can be transitioned quickly to a fixed base attachment increasing the versatility of the machine

**Standard Equipment:** 2 x Parallel fences, 2 x Dust extraction adapter, 8 mm collet (1/4" GB), 17 mm spanner, Plunge and Fixed base, Centering cone, Tough Kit Box

Power Input	900 Watts
Power Output	620 Watt
No Load Speed	16000-27000 rpm
Plunge Stroke/Movement	55 mm
Collet Size	6-8 mm
Max. Cutter Diameter	36 mm
Weight	2.9 kg
Length x Height	110 x 270 mm



**1100 Watt 6-8mm ( 1/4" ) Variable Speed Plunge Router**

**DW621K/ DW621**



Unique through the column dust extraction for excellent cutter visibility - no adaptor or hose which restrict visibility is required  
Full wave electronic speed control with feedback ensures the selected speed is maintained under any load for a consistent finish in all grades of timber, aluminium and plastics  
Two column precision guide with phosphor bronze bushing - the extra broad column provides superior rigidity for the greatest accuracy in this size of router  
Power switch located in the handle for ease of use features lock off and lock on actions

**Standard Equipment:** Parallel fence with fine adjustment, Dust extraction adapter and cap, 8mm collet (1/4" GB), 17/10mm spanner, Heavy duty carrying case, Also available in a 1400W 12mm ( 1/2" ) version

Power Input	1100 Watts
Power Output	620 Watt
No Load Speed	8000-24000 rpm
Plunge Stroke/Movement	55 mm
Collet Size	6-8 mm
Max. Cutter Diameter	36 mm
Weight	3.1 kg
Length x Height	165 x 325 mm



**1400W 12mm ( 1/2" ) Variable Speed Plunge Router**

**DW622K/ DW622**



1400W 6-12mm Router based with all the design features of DW621  
Precision depth of cut micro-adjuster accurate to 0.1mm ensures precise results  
Unique through the column dust extraction for excellent cutter visibility - no adaptor or hose which restrict visibility is required  
Power switch located in the handle for ease of use features lock off and lock on actions  
Full wave electronic speed control with feedback ensures the selected speed is maintained under any load for a consistent finish in all grades of timber, aluminium and plastics  
Soft start to eliminate any small initial movement that might misalign the cutter

**Standard Equipment:** Parallel fence with fine adjustment, Dust extraction adapter and cap, 8mm and 12mm collet (1/4 and 1/2" GB), 22mm spanner, Heavy duty carrying case

Power Input	1400 Watts
Power Output	620 Watt
No Load Speed	8000-24000 rpm
Plunge Stroke/Movement	55 mm
Collet Size	6-12mm mm
Max. Cutter Diameter	36 mm
Weight	3.1 kg
Length x Height	165 x 325 mm



**2000 Watt 12mm ( 1/2" ) Variable Speed Plunge Router**

**DW625EK/ DW625E**



Soft start to eliminate small initial movements that might misalign the cutter, especially important with such a powerful router  
Two column precision guide with large phosphor bronze bushes for plunging accuracy in a high quality die cast aluminium housing so that carefully controlled plunge cuts can be made  
Electronic speed control ensures that the same fine finish is achieved in all grades of timber, aluminium and plastics since the full wave electronic control ensures the selected speed is maintained under any load  
Large comfortable handles with the on/off switch and plunge lock at your finger tips for excellent control

**Standard Equipment:** Parallel fence with fine adjustment, Dust extraction adapter, 12mm collet (1/2" UK), 22mm spanner, Heavy duty carrying case

Power Input	2000 Watts
Power Output	1400 Watt
No Load Speed	8000-20000 rpm
Plunge Stroke/Movement	80 mm
Collet Size	6-12.7 mm
Max. Cutter Diameter	50 mm
Weight	5.1 kg
Length x Height	290 x 295 mm



**Collets**



DE6257



DE6272

Collet No.	Description	D26204K	D26200	D26203	DW609	DW614	DW615	DW621/K	DW622/K	DW624	DW625E/EK	DW626	DW629	DW670
DE6257	12.7 mm Collet								•			•		
DE6258	12 mm Collet								•			•		
DE6259	10 mm Collet								•			•		
DE6260	8 mm Collet								•			•		
DE6261	6.35 mm (1/4") Collet								•			•		
DE6262	6 mm Collet								•			•		
DE6272	6 mm Collet									•	•		•	
DE6273	6.35 mm (1/4") Collet									•	•		•	
DE6274	8 mm Collet									•	•		•	
DE6275	9.52 mm (3/8") Collet									•	•		•	
DE6276	10 mm Collet									•	•		•	
DE6277	12 mm Collet									•	•		•	
DE6278	12.7 mm (1/2") Collet									•	•		•	
DE6950	6 mm Collet	•	•	•	•	•	•	•	•					
DE6951	6.35 mm (1/4") Collet	•	•	•	•	•	•	•	•					
DE6952	8 mm Collet	•	•	•	•	•	•	•	•					

**Guide Bushes**



DE6301



DE6960



DE6991

Collet No.	Description	D26204K	D26200	D26203	DW609	DW614	DW615	DW621/K	DW622/K	DW624	DW625E/EK	DW626	DW629	DW670
DE6301	Guide Bush System										•	•	•	
DE6310	10mm guide bush - use with DE6301										•	•	•	
DE6324	24mm guide bush - use with DE6301										•	•	•	
DE6327	27mm guide bush - use with DE6301										•	•	•	
DE6330	30mm guide bush - use with DE6301										•	•	•	
DE6340	40mm guide bush - use with DE6301										•	•	•	
DE6427	27mm guide bush - fits to base										•	•	•	
DE6430	30mm guide bush - fits to base										•	•	•	
DE6440	40mm guide bush - fits to base										•	•	•	
DE6910	10.8mm guide bush - fits to base							•	•			•		
DE6914	14mm guide bush - fits to base							•	•			•		
DE6916	16mm guide bush - fits to base							•	•			•		
DE6917	17mm guide bush - fits to base							•	•			•		
DE6918	18mm guide bush - fits to base							•	•			•		
DE6920	20mm guide bush - fits to base							•	•			•		
DE6924	24mm guide bush - fits to base							•	•			•		
DE6926	26mm guide bush - fits to base							•	•			•		
DE6927	27mm guide bush - fits to base							•	•			•		
DE6930	30mm guide bush - fits to base							•	•			•		
DE6940	40mm guide bush - fits to base							•	•			•		
DE6961	10mm guide bush - fits to base							•	•			•		
DE6989	17mm guide bush - fits to base	•	•	•	•	•	•	•	•					
DE6990	24mm guide bush - fits to base	•	•	•	•	•	•	•	•					
DE6991	27mm guide bush - fits to base	•	•	•	•	•	•	•	•					
DE6992	30mm guide bush - fits to base	•	•	•	•	•	•	•	•					

**Fences, Bars, Bases**



Cat. No.	Description	D26204K	D26200	D26203	DW609	DW614	DW615	DW621/K	DW622/K	DW624	DW625E/EK	DW626	DW629	DW670
DE6913	Universal micro adjustable fence with dust extraction port				•	•	•	•	•	•	•	•	•	•
DE6905	Trammel bar for cutting circles				•	•	•	•	•			•		
DE6284	Circular Sub Base									•	•		•	
DW55031	Router Attachment for Guide Rail	•	•		•	•	•	•	•	•	•	•		
D262001	Compact Router round base	•	•											
D262003	Compact Router Plunge Base Side Fence	•		•										
D262004	Compact Router Plunge Base	•	•	•										
D262005	Compact Router Fixed Base Kit	•	•	•										
D262006	Compact Router Edge Guide for Fixed Base	•	•											

**Thread Adapters**



Cat. No.	Description	D26204K	D26200	D26203	DW609	DW614	DW615	DW621/K	DW622/K	DW624	DW625E/EK	DW626	DW629	DW670
DE6281	M12 thread collet conversion / spindle extension kit. For use with DE6282 or DE6283									•	•	•	•	
DE6282	12.7 mm (1/2") shank - M12 adapter									•	•	•	•	
DE6283	12 mm shank - M12 adapter									•	•	•	•	

**Fine Height Adjusters**



Cat. No.	Description	D26204K	D26200	D26203	DW609	DW614	DW615	DW621/K	DW622/K	DW624	DW625E/EK	DW626	DW629	DW670
DE6956	Fits DW621/20/15/14/13					•	•	•	•					
DE6966	Fits DW624/5/6/9									•	•	•	•	

**600 W - (6-8 mm) Laminate Trimmer**

**NEW** DWE6005



Especially for small radius, chamfers and shaping edges  
 Light weight makes it ideal for one hand use and accurate work  
 Copy follower system with 10 mm ball bearing, comfort and precision  
 Spindle lock mechanism for quick and easy cutter changes with a single spanner  
 Variable speed control 16000 - 34000 rpm enables router bit to be optimised for application

**Standard Equipment:** D shaped base, 6 mm (1/4" UK) collets, Copy follower, Fence, 17 mm spanner, Dust extraction adapter

Power Input	590 Watts
Power Output	340 Watt
No Load Speed	30000 rpm
Plunge Stroke/Movement	22 mm
Collet Size	6 - 8 mm
Max. Cutter Diameter	29 mm
Weight	1.5 kg
Length x Height	110 x 205 mm



**600 W - Biscuit Joiner**

DW682K



Rack and pinion control provides precise vertical adjustment and fence alignment  
 Pre-set cutting depths for 0, 10 and 20 biscuit sizes with additional fine adjustment for ultimate accuracy  
 Grooving setting with up to 20 mm depth of cut gives increased versatility  
 Anti slide grippers, eight guiding notches and fence window to aid accurate cuts

**Standard Equipment:** Tungsten carbide tipped grooving cutter, Shavings bag, Spanner, 35 mm Dust extraction spout, Heavy duty carrying case

Power Input	600 Watts
Power Output	335 Watt
No Load Speed	10000 rpm
Max. Cutter Diameter	100 mm
Max. Cutting Depth	20 mm
Fence adjustment	0-90 °
Joint Groover Setting	4 mm
Weight	3.0 kg
Length x Height	320 x 150 mm



**Replacement Inserts**



Cat. No.	Fits
DE6853	DW685K

**Dust Extraction Adapters**



Cat. No.	Fits
DE6852	DW685K

**4 mm Planer**

D26500/ D26500K



A powerful planer that copes effortlessly with hard woods, even at maximum depth of cut, giving a smooth, consistent finish  
 Left and right chip ejection for convenience  
 Front handle depth control in clearly marked 0.1 mm steps for accurate setting with positive indexing  
 3 chamfering grooves in the front shoe simplify precision fitting jobs

**Standard Equipment:** Tungsten carbide tipped reversible blades, Parallel fence, Rebate depth guide, Dust extraction spout, Chip ejector

Power Input	1050 Watts
Power Output	620 Watt
No Load Speed	13500 rpm
Maximum Depth of Cut	4 mm
Rebating Depth	25 mm
Planer Width	82 mm
Shoe Length	320 mm
Drum Diameter	64 mm
Weight	4.0 kg
Length x Height	320 x 180 mm



**2.5 mm Planer DW680/ DW680K**



Low weight and perfect balance make this planer ideal for single handed use in awkward applications  
 Front handle depth control in clearly marked 0.1 mm steps for accurate setting with a positive stop position  
 High power motor for smooth results, even in hard woods  
 3 different size chamfering grooves in the front shoe simplify precision fitting jobs

**Standard Equipment:** Tungsten carbide tipped reversible blades, Parallel fence, Dust extraction adapter

Power Input	600 Watts
Power Output	350 Watt
No Load Speed	15000 rpm
Maximum Depth of Cut	2.5 mm
Rebating Depth	12 mm
Planer Width	82 mm
Shoe Length	290 mm
Drum Diameter	54 mm
Weight	3.2 kg
Length x Height	290 x 170 mm



**1.5 mm Planer DW677**



Low weight and perfect balance make this planer ideal for single handed use in awkward applications  
 Front handle depth control in clearly marked 0.1 mm steps for accurate setting with a positive stop position.  
 A large planer blade drum rotating at high speed provides an excellent finish  
 3 different size chamfering grooves in the front shoe simplify precision fitting jobs

**Standard Equipment:** Tungsten carbide tipped reversible blades, Parallel fence, Dust extraction spout

Power Input	600 Watts
Power Output	350 Watt
No Load Speed	15000 rpm
Maximum Depth of Cut	1.5 mm
Rebating Depth	12 mm
Planer Width	82 mm
Shoe Length	290 mm
Drum Diameter	54 mm
Weight	2.8 kg
Length x Height	290 x 170 mm



**1.5mm Planer D26676**



Light weight and perfect balance make this planer ideal for single handed use in awkward applications  
 296mm machined aluminium shoe offers finer finish and less vibration  
 Tall profile and large size depth adjustment knob offers easier and more precise depth adjustment 0.1mm per graduation  
 Finger rest handle design offers better balance and less fatigue for long hour use

Power Input	550 Watts
No Load Speed	17000 rpm
Maximum Depth of Cut	1.5 mm
Rebating Depth	9 mm

**Dust Extraction Adapter**



Cat. No.	Fits
DE2651	D26500, D26501
DE6775	DW677, DW680

**Chip Containers**



Cat. No.	Fits
DE2650	D26500(K)
DE6784	DW677 DW680 DW678K DW678EK

**¼ Sheet Orbital Palm Grip Sander NEW DWE6411**



230 Watt motor sands at 14,000 orbits per minute, providing a superior finish  
 Sealed 100% ball-bearing construction provides longer life  
 Dual plane counter-balance low-vibration design reduces user fatigue  
 Textured anti-slip top and body grip provides ultimate comfort and control during prolonged use

**Standard Equipment:** Dust bag with built-in extractor connection

Power Input	230 Watts
Orbits Per Minute	14000 opm
Orbit Size	1.6 mm
Paper Size	140x115 mm
Weight	1.3 kg



**½ Sheet Electronic Orbital Sander D26422/ D26423**



High performance motor with aluminium bearing seats for continuous use and a long life  
 Small orbit size for a smooth finish  
 Efficient dust collection using integrated dustbag or external dust extractor for a better sanding performance and sheet life  
 Optional hook and loop base pad included to enable fast sanding sheet changes

**Standard Equipment:** Fabric and paper dust bags with built-in extractor connection and support tray, Nylon hook & loop sanding pad

Power Input	280 Watts
Power Output	190 Watt
Rotation speed	12000-22000 rpm
Orbits Per Minute	24000-44000 opm
Orbit Size	2.5 mm
Paper Size	93 x 230 mm
Pad Size	92 x 190 mm
Weight	2.6 kg
Length x Height	270 x 190 mm



**½ Sheet Electronic Orbital Sander D26420/ D26421\***



High performance motor with aluminium bearing seats for continuous use and a long life  
 Small orbit size for a smooth finish  
 Efficient dust collection using integrated dustbag or external dust extractor for a better sanding performance and sheet life  
 Optional hook and loop base pad included to enable fast sanding sheet changes

**Standard Equipment:** Fabric and paper dust bags with built-in extractor connection and support tray, Nylon hook & loop sanding pad

Power Input	350 Watts
Power Output	190 Watt
Rotation speed	12000-22000 rpm
Orbits Per Minute	24000-44000 opm
Orbit Size	2.5 mm
Paper Size	113 x 280 mm
Pad Size	112 x 236 mm
Weight	2.8 kg
Length x Height	270 x 190 mm



\*D26421 - non-electronic version (22,000 opm)

**125 mm Random Orbit Palm Grip Sander NEW DWE6423**



Controlled finishing system controls pad speed and minimises gouging during start up  
 Compact palm grip design  
 Sealed 100% ball-bearing construction provides longer life  
 Dust-sealed switch prevents contamination

**Standard Equipment:** Fabric dust bag with built-in extractor ports

Power Input	280 Watts
Orbits Per Minute	7000-12000 opm
Orbit Size	2.4 mm
Paper Size	125 mm
Weight	1.3 kg



\*240V only

**150 mm Pistol Grip Dual-Orbit Random Orbit Sander D26410**



Two orbit size settings: a 3 mm orbit for fine finishing and a 6 mm orbit for fast material removal  
 Controlled finishing system eliminates start-up scratching by keeping the sanding pad at a controlled speed  
 Variable speed for heat sensitive sanding, polishing and superior finishing  
 Dust sealed switch and bearings for a long life

**Standard Equipment:** Fabric and paper dust bags with built-in extractor connection and support tray

Power Input	400 Watts
Power Output	250 Watt
Rotation speed	4000 - 10000 rpm
Orbits Per Minute	8000-20000 opm
Orbit Size	3.0 & 6.0 mm
Paper Size	150 mm
Weight	2.7 kg
Length x Height	129 x 200 mm



**150 mm Body Grip Random Orbit Sander DW443\***



Controlled finishing system eliminates start-up scratching by keeping the sanding pad at a controlled speed  
 Variable speed for heat sensitive sanding, polishing and superior finishing  
 Right angle design and side handle make this sander ideal for extended use especially when sanding large surfaces, such as boat hulls, walls, doors and tables  
 Dust sealed switch and bearings for a long life

**Standard Equipment:** Multi-position side handle, Dust bag

Power Input	530 Watts
Power Output	295 Watt
Rotation speed	4,200 - 7,600 rpm
Orbits Per Minute	8,400-15,200 opm
Orbit Size	5.0 mm
Paper Size	150 mm
Weight	2.7 kg
Length x Height	320 x 125 mm



\*240V only



**373 W – 152 mm Dual Honing/Grinding Machine**

**DW752R**



Powerful engine provides maximum power and torque for a variety of uses  
 150 mm wheel with coarse and medium grain for any type of use in smoothing and polishing  
 Metallic support and precision machinery allows parts worked on to be held for greater control  
 Adjustable eye protection protects the user from sparks or fragments  
**Standard Equipment:** Grinding wheel, Honing wheel, Clamping and tool sharpening attachments, Spark guards, Spanner

Power Input	373 Watts
Power Output	300 Watt
No Load Speed	3450 rpm
Wheel Diameter	152 mm
Weight	13.8 kg
Length x Height	310 x 215 mm

**1800W Standard Heatgun**

**D26411**



Durable design with added protection for the heating element  
 Light weight ergonomics and compact design for increased comfort and application use  
 Two air flows to maximise control in most applications

Power Input	1800 Watts
Operating Temperature	50-400 / 50-600 °C
Air Flow	250 / 450 l/min
Weight	0.80 kg

**Standard Equipment:** Cone nozzle, Fish tail surface nozzle

**2000W Digital LED Heatgun**

**D26414**



Durable hot air gun for Professional applications  
 Excellent temperature control and memory setting for consistent temperature requirements  
 2000 Watt power with optimised cooling  
 Compact and lightweight for easy handling and use

Power Input	2000 Watts
Operating Temperature	50-600 °C
Air Flow	650 l/min
Weight	0.85 kg

**Standard Equipment:** Cone nozzle, Fish tail surface nozzle, Steel paint scraper for all applications

**Specialist Platens & Backing Pads, Dust Extraction Adapters, Dust Filters & Bags**




Cat. No.	Description	Fits
D264411	¼ Sheet Hook & Loop Platen	D26441, DW411
D264412	¼ Sheet Foam Backed Platen	D26441, DW411
DE2639	150 mm 6 & 8-hole pattern	D26410, DW443
DE2643	150 mm medium-hard hook and loop platen	D26410
DE2644	150 mm soft hook and loop platen	D26410
DE2645	160 mm sponge backed disc for sanding curved surfaces	D26410, DW443
DE2646	160 mm Polishing Sponge	D26410, DW433
DE2647	160 mm Lambswool Buffing Disc	D26410, DW443
DE2648	160 mm felt disc for fine finishing	D26410, DW443
DE2649	150 mm nylon coarse polishing / oxide removal disc	D26410, DW443



Cat. No.	Fits
D264304	D26430
DE4050	DW432, DW433
DE6502	DW650E



Cat. No.	Fits	Description	Pack Qty
D264305	D26430	Dust filters	10
DE2642	D26410, D26420, D26421, D26422, D26423	Pack of 5 disposable dust bags	5

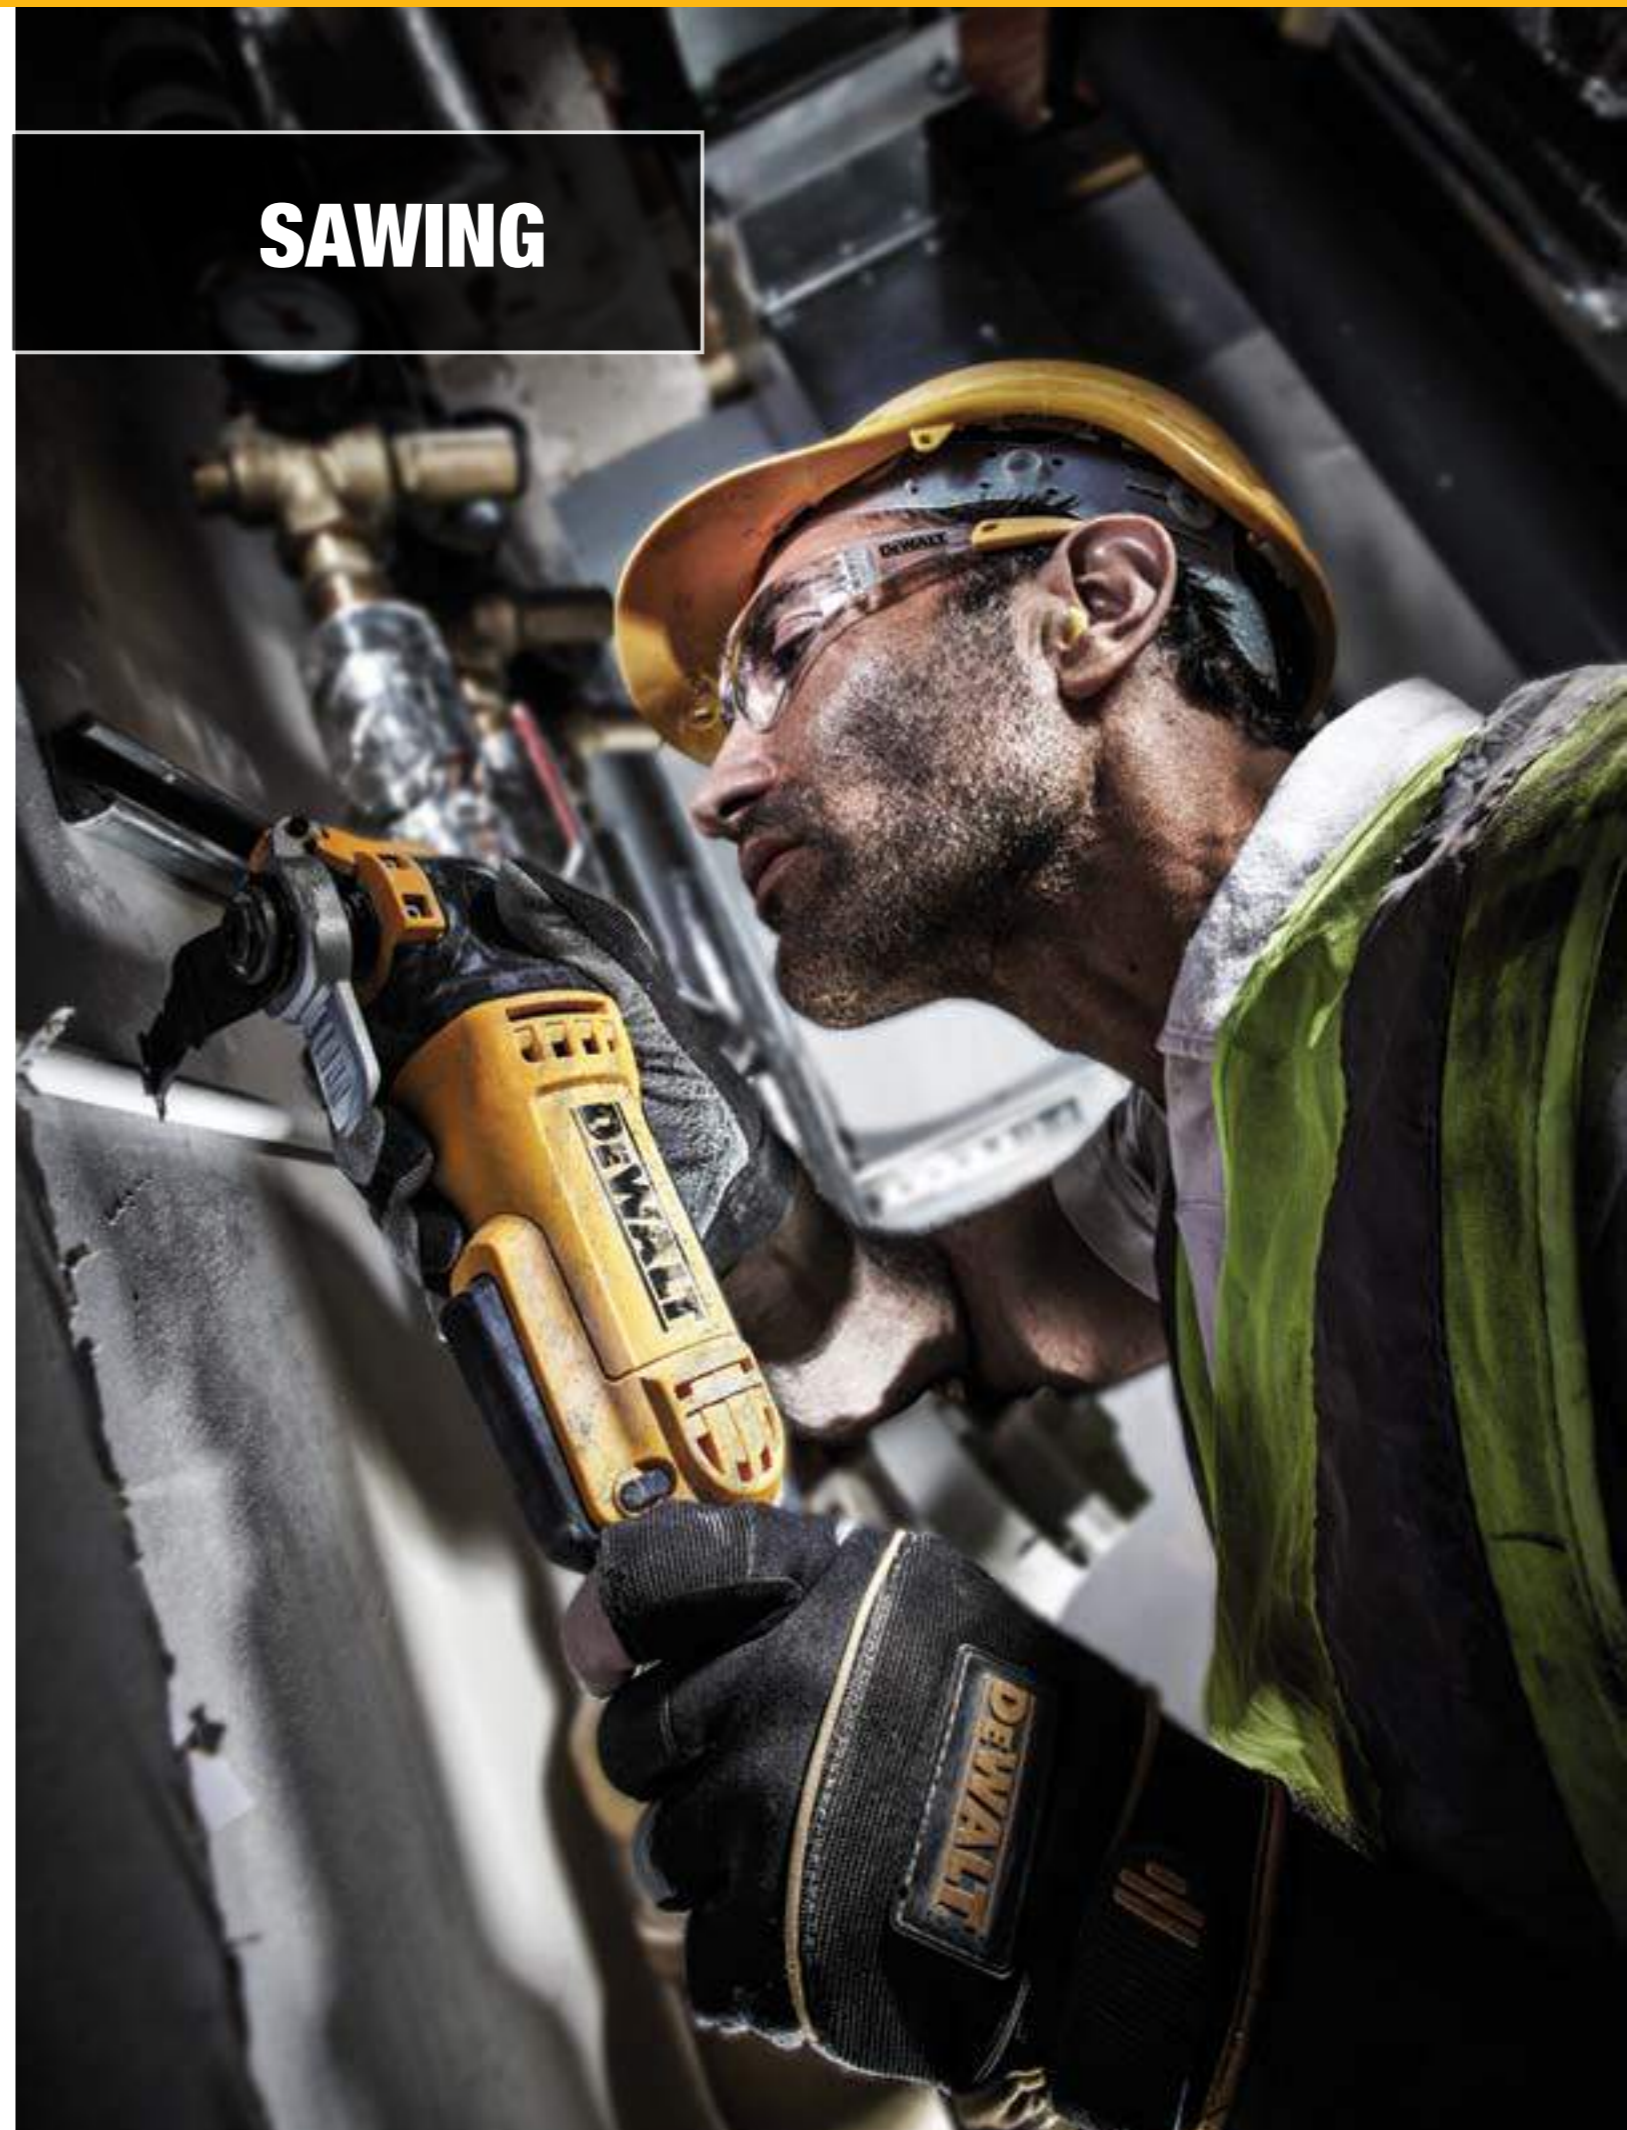

**SAWING**

**Corded Multi-Tool**

**DWE315/ DWE315KT\***



Quick accessory change & adjustment, no Hex Key required  
 Superior Ergonomics  
 0 - 22,000 opm Variable Speed Trigger for ultimate control  
 Oscillating angle 1.6°  
 Sanding Platen included  
 Universal Adaptor included

**Standard Equipment:** Oscillating Wood with Nails Blade, Oscillating Rigid Scraper, Oscillating Sanding Platen, Sanding Sheets (25 pcs Assorted Grades), Universal Adaptor, 5mm Hex Key

Power Output	300 Watt
Speed	0-22,000 min/-1
Weight	1.475 kg
Switch Type	Trigger
Tool free Accessory Fitment	Yes
Bosch Accessory Fitment Adapter	Yes
'Lock on' switch	Yes
Kit Box	No

\*KT version includes a 37 piece accessory set

**55mm Depth of Cut Heavy Duty Plunge Saw + 1.5m Guide Rail**

**DWS520KR**



55mm depth of cut allows the trimming and sizing of most common door sizes  
 Parallel plunge allows the user to maintain a smooth and constant hand position while cutting  
 The anti kickback function stops the saw from moving backwards along the rail and helps stop the saw from climbing out of the work piece when making plunge cuts  
 A 48 tooth blade gives a fine and accurate finish with very little breakout in laminates

**Standard Equipment:** 48 tooth precision circular saw blade, Heavy duty carrying case

Power Input	1300 Watts
Power Output	690 Watt
No Load Speed	1750 - 4000 rpm
Blade Diameter	165 mm
Blade Bore	20 mm
Bevel Capacity	47 °
Max. Depth of Cut at 90°[with guide rails]	55 mm
Max. Depth of Cut at 45°[with guide rails]	40 mm
Weight	5.1 kg
Length x Height	303 x 265 mm



**55 mm Depth of Cut Heavy Duty Plunge Saw**

**DWS520K**



55mm depth of cut allows the trimming and sizing of most common door sizes  
 Parallel plunge allows the user to maintain a smooth and constant hand position while cutting  
 The anti kickback function stops the saw from moving backwards along the rail and helps stop the saw from climbing out of the work piece when making plunge cuts  
 A 48 tooth blade gives a fine and accurate finish with very little breakout in laminates

**Standard Equipment:** 48 tooth precision circular saw blade, Heavy duty carrying case

Power Input	1300 Watts
Power Output	690 Watt
No Load Speed	1750 - 4200 rpm
Blade Diameter	165 mm
Blade Bore	20 mm
Bevel Capacity	47 °
Max. Depth of Cut at 90°[with guide rails]	55 mm
Max. Depth of Cut at 45°[with guide rails]	40 mm
Weight	5.1 kg
Length x Height	303 x 265 mm



**Guide Rails**



DWSS026



DWSS029



DWSS031

Cat. No.	Description
DWSS021	1 m guide rail
DWSS022	1.5 m guide rail
DWSS023	2.6 m guide rail
DWSS025	Bag - for use with 1 m and 1.5 m DeWALT guide rails
DWSS026	Clamps for use with DeWALT guide rails
DWSS029	Replacement edge strip
DWSS030	Replacement 'Teflon' strip
DWSS031	Router attachment for guide rail

**701 W - Heavy Duty Top Handle Jigsaw**

**DW331K**



Quick and easy patented keyless blade change system accepts T-shank blades  
 Powerful 701 Watt motor with variable speed delivers fast cutting action up to 3100 strokes per minute  
 Patented anti-vibration counterbalance mechanism and rubber grip provide smooth operation  
 4-position pendulum action controls the aggressiveness or smoothness of cuts

**Standard Equipment:** Anti-scratch cover, Anti-splinter insert, Dust extraction adapter, Heavy duty carrying case

Power Input	701 Watts
Power Output	445 Watt
No Load Stroke Rate	0-3100 spm
Stroke Length	26 mm
Bevel Capacity	45 °
Max. Cutting Capacity [Wood]	130 mm
Max. Cutting Capacity [Steel]	12 mm
Max. Cutting Capacity [Non Ferrous Metal]	30 mm
Weight	2.8 kg
Length x Height	250 x 210 mm



**701 W - Heavy Duty Body Grip Jigsaw**

**DW333K\***



Quick and easy patented keyless blade system accepts T-shank blades  
 Powerful 701 Watt motor with variable speed delivers fast cutting action up to 3100 strokes per minute  
 Patented anti-vibration counter-balance mechanism and rubber grip provide smooth operation  
 4-position pendulum action controls the aggressiveness or smoothness of cuts

**Standard Equipment:** Anti-scratch cover, Anti-splinter insert, Dust extraction adapter, Heavy duty carrying case

Power Input	701 Watts
Power Output	445 Watt
No Load Stroke Rate	800-3100 spm
Stroke Length	26 mm
Bevel Capacity	45 °
Max. Cutting Capacity [Wood]	130 mm
Max. Cutting Capacity [Steel]	12 mm
Max. Cutting Capacity [Non Ferrous Metal]	30 mm
Weight	2.8 kg
Length x Height	265 x 210 mm



**550 W - Top Handle Compact Jigsaw**

**DW349**



Keyless blade change with patented anti-deflection clamp design for ease of use and accuracy  
 Compact, ergonomic, design gives user comfort and versatility in use  
 Variable speed dial and trigger allows controlled cutting in all materials  
 Adjustable pendulum action gives increased cutting performance and longer saw blade life

**Standard Equipment:** Hex key, Anti-scratch shoe cover, Dust extraction shield, Vacuum adaptor, Heavy duty carrying case

Power Input	550 Watts
Power Output	350 Watt
No Load Stroke Rate	0-3100 spm
Stroke Length	20 mm
Bevel Capacity	45 °
Max. Cutting Capacity [Wood]	85 mm
Max. Cutting Capacity [Steel]	10 mm
Max. Cutting Capacity [Non Ferrous Metal]	20 mm
Weight	2.0 kg
Length x Height	230 x 200 mm



**65mm D0C Compact Circ Saw**

**DWE560/ DWE560K**



Compact, Lightweight, Easy to use circular saw with 65mm depth of cut  
 High power 1350W motor gives increased cutting performance  
 Cutaway inner guard gives improved line of sight to cutting line  
 Dust blower clears dust and debris from cut line

**Standard Equipment:** 24 tooth saw blade, Rip fence, Blade spanner, Dust Extraction Spout

Power Input	1350 Watts
Power Output	850 Watt
No Load Speed	5500 rpm
Blade Diameter	184 mm
Blade Bore	16 mm
Bevel Capacity	48 °
Weight	3.7 kg
Length x Height	286 x 226 mm



**86 mm Depth of Cut Heavy Duty Saw**

**D23700**



High power, durable motor delivers excellent power even at maximum depth of cut  
 Stable block construction for low vibration running and long service life  
 Spindle lock for ease of blade change  
 Optimum balance for fatigue-free operation

**Standard Equipment:** 24 Tooth Precision saw blade, Rip fence, Blade spanner

Power Input	1750 Watts
Power Output	960 Watt
No Load Speed	4700 rpm
Blade Diameter	235 mm
Blade Bore	30 mm
Bevel Capacity	45 °
Max. Depth of Cut at 90°[with guide rails]	N/A mm
Max. Depth of Cut at 45°[with guide rails]	N/A mm
Weight	8.2 kg
Length x Height	430 x 290 mm



**1200 Watt Heavy Duty Reciprocating Saw DW311K**



1200 Watt motor delivers increased power for heavy duty applications  
Orbital action delivers fast cutting in wood applications  
0-2,600 SPM and 28 mm stroke length for fast and efficient cutting  
Keyless adjustable shoe easily adjusts depth of cut and extends the blade life

**Standard Equipment:** Heavy duty carrying case

Power Input	1200 Watts
Power Output	630 Watt
No Load Stroke Rate	0-2600 spm
Stroke Length	28 mm
Max. Cutting Capacity [Wood]	300 mm
Max. Cutting Capacity [Steel Sections & Pipes]	130 mm
Max. Cutting Capacity [PVC]	160 mm
Weight	4.0 kg
Length x Height	460 x 60 mm



**1200 Watt Heavy Duty Reciprocating Saw DW310K**



1200 Watt motor delivers increased power for heavy duty applications  
0 - 2,600 SPM and 28 mm stroke length for fast and efficient cutting  
Keyless adjustable shoe easily adjusts the depth of cut and extends the blade life  
Variable speed trigger provides control and versatility

**Standard Equipment:** Heavy duty carrying case

Power Input	1200 Watts
Power Output	630 Watt
No Load Stroke Rate	0-2600 spm
Stroke Length	28 mm
Max. Cutting Capacity [Wood]	300 mm
Max. Cutting Capacity [Steel Sections & Pipes]	130 mm
Max. Cutting Capacity [PVC]	160 mm
Weight	4.0 kg
Length x Height	460 x 60 mm



**1100 Watt - Reciprocating Saw NEW DWE305PK**



1100 Watt motor designed for heavy duty applications  
4 position blade clamp allows for flush cutting and increased versatility  
With a 29 mm stroke length, the DWE305PK delivers excellent cutting performance  
Lever-action keyless blade clamp for quick and easy blade changing

**Standard Equipment:** Heavy duty carrying case

Power Input	1100 Watts
Power Output	525 Watt
No Load Stroke Rate	0-2800 spm
Stroke Length	29 mm
Max. Cutting Capacity [Wood]	280 mm
Max. Cutting Capacity [Steel Sections & Pipes]	100 mm
Max. Cutting Capacity [PVC]	130 mm
Weight	3.5 kg
Length x Height	435 x 178 mm



**Compact Reciprocating Saw DWE357K**



Compact Design at only 368mm in length, easy access when cutting in tight areas and more flexibility of applications

Lightweight and balanced for additional control at only 3.1kg

4 position blade clamp allows for flush cutting and increased versatility

Lever-action keyless blade clamp for quick and easy blade changing

1050 watt motor, designed for Heavy Duty applications

With a 29 mm stroke length & 0-2,800 SPM, the DWE357K delivers excellent cutting performance

**Standard Equipment:** Heavy duty carrying case

Power Input	1050 Watts
Power Output	525 Watt
No Load Stroke Rate	0-2800 spm
Stroke Length	29 mm
Max. Cutting Capacity [Wood]	280 mm
Max. Cutting Capacity [Steel Sections & Pipes]	100 mm
Max. Cutting Capacity [PVC]	130 mm
Weight	3.1 kg
Length x Height	365 x 200 mm

**295mm Alligator Power Saw NEW DWE396**



DWE396 with 295mm Class 12 TCT Blade  
Ideal for cutting Class 12 clay blocks (Paroton)  
Durable high power motor for the toughest applications  
Ergonomic design with overmoulded rear handle & bale handle for superior handling and less fatigue

**Standard Equipment:** Class 12 TCT blade, Hex key

Power Input	1600 Watts
Power Output	840 Watt
No Load Stroke Rate	3000 spm
Stroke Length	40 mm
Blade Length	29.5 cm
Blade Stop	- s
Weight	5.35 kg
Length x Height	775 x 219 mm



**430mm Alligator Power Saw NEW DWE397**



Ideal for cutting Class 12 clay block (Paroton),  
Powerful motor to meet all application needs  
Two long life and durable saw blades running in opposite directions so the material will not move while cutting  
Dust sealed gearcase and bearings for increased durability

**Standard Equipment:** TCT Class12, set of blades, Hex key

Power Input	1700 Watts
Power Output	900 Watt
No Load Stroke Rate	3000 spm
Stroke Length	40 mm
Blade Length	43.0 cm
Blade Stop	- s
Weight	5.5 kg
Length x Height	918 x 219 mm



**430mm Alligator Power Saw 78 Tooth Blade NEW DWE398**



Two 39 tooth Tungsten carbide tipped blades enable the user to cut class 20 Paroton bricks  
Optimal cutting capabilities  
Powerful motor to meet all application needs  
Two long life and durable saw blades running in opposite directions so the material will not move while cutting

**Standard Equipment:** Hard metal set of blades (black) for class 20 paroton brick, Hex key

Power Input	1700 Watts
Power Output	900 Watt
No Load Stroke Rate	3000 spm
Stroke Length	40 mm
Blade Length	43 cm
Blade Stop	- s
Weight	5.5 kg
Length x Height	918 x 219 mm



**430mm Alligator Power Saw NEW DWE399**



Ideal for cutting Aerated Concrete Block (Gasbeton) and Drywall  
Powerful motor to meet all application needs  
Two long life and durable saw blades running in opposite directions so the material will not move while cutting  
Dust sealed gearcase and bearings for increased durability

**Standard Equipment:** TCT Aerated Concrete (Gasbeton), set of blades, Hex key

Power Input	1700 Watts
Power Output	900 Watt
No Load Stroke Rate	3000 spm
Stroke Length	40 mm
Blade Length	43.0 cm
Blade Stop	- s
Weight	5.5 kg
Length x Height	918 x 219 mm



**ALLIGATOR BLADES**

**DEWALT Alligator Blades are essential to optimise the performance of your Alligator saw**

Ideal for fast and easy cutting in:

- Building blocks
- Wood
- Plywood
- Chipboard
- Drywall

For the complete range of Alligator Blades see page 154



**MITRE SAWS**

**THERE IS ONLY 1 CHOICE**

**DWS778 FEATURES**



- CAPACITY**
- Impressive cutting capacity – meet all your application needs without compromise
  - Depth of cut - 85mm
  - Cross cut - 305mm
  - Bevel Capacity - 48 degrees



- DUST EXTRACTION**
- One Port dust extraction for increased dust removal rate
  - Airlock™ compatible



**WHY DEWALT MITRE SAWS?**

Combining our woodworking heritage with cutting edge innovation and precision engineering, DeWALT miter saws provide users with unrivalled cutting accuracy, performance and durability.

DeWALT miter saws feature unrivalled build quality and precise mitre and bevel adjustment systems, enabling repeatable accuracy time after time.

XPS cut line visibility provides an illuminated work piece, combined with fast and accurate alignment for maximum productivity.



- ACCURACY**
- Precision cast aluminium base
  - Fence keyed into the base for long-term accuracy
  - Adjustable mitre plate
  - Fast and solid cam-lock mitre system



- PORTABILITY**
- Best in class volume to weight ratio
  - Only 17.2kg
  - Internal slide bars to reduce bulk



- EASE OF USE**
- XPS system shows clear visible cut-line on the workpiece & illuminates surrounding work area
  - Set-up cuts faster and ensures 100% accuracy
  - Integrated Mitre stops at 15, 22.5, 30, 45 degrees



Compatible with all DeWALT leg stands and dust extraction systems

**216 mm Crosscut Mitre Saw**

**DW777/ DW771\***



90°/90°	270 x 60 mm	265 x 62 mm
45°/90°	190 x 60 mm	189 x 62 mm
90°/45°	270 x 48 mm	173 x 62 mm
45°/45°	190 x 48 mm	190 x 48 mm

The classic pull saw design improved and updated for the modern user  
 New 1800 Watt motor for powerful cutting in all materials (1600Watt 110V LX version Uk Only)  
 The base and fence have been machined to meet the accuracy requirements of the most demanding applications  
 Compact internal rail design for huge cutting capacity in a highly transportable format

**Standard Equipment:** 24 tooth saw blade, 2 bench mounting bolts, Blade spanner, Material Clamp

Power Input	1800 Watts
Power Output	1100 Watt
Blade Speed	6300 rpm
Blade Diameter	216 mm
Blade Bore	30 mm
Bevel Capacity	48 °
Mitre Capacity [right/left]	50/50 °
Weight	14.0 kg
Depth	550 mm
Length x Height	490 x 590 mm

\*DW771 is electronic



**250mm Compact Slide Mitre Saw**

**DWS778**



90°/90°	305 x 85 mm
45°/90°	215 x 85 mm
90°/45°	305 x 45 mm
45°/45°	215 x 45 mm

Built on classic pull saw design improved and updated for the modern user  
 New 1850 Watt motor for powerful cutting in all materials (1650Watt 110V LX version Uk Only)  
 Dust extraction specifically designed to meet the needs of the professional user in heavy use applications, protection from airborne dust particles minimises health risk over long periods  
 The base and fence have been machined to meet the accuracy requirements of the most demanding applications

**Standard Equipment:** TCT tooth saw blade, Material Clamp, Blade Allen Keys

Power Input	1850 Watts
Power Output	1050 Watt
Blade Speed	4300 rpm
Blade Diameter	250 mm
Blade Bore	30 mm
Bevel Capacity	48 °
Mitre Capacity [right/left]	50/50 °
Weight	17.2 kg
Depth	465 mm
Length x Height	615 x 390 mm

**305mm Compound Slide Mitre Saw with XPS**

**DWS780**



90°/90°	303 x 110 mm	345 x 76 mm
45°/90°	268 x 63 mm	354 x 44 mm
90°/45°	211 x 112 mm	244 x 76 mm



Power Input	1675 Watts
Power Output	960 Watt
Blade Speed	1900 - 3800 rpm
Blade Diameter	305 mm
Blade Bore	30 mm
Bevel Capacity	49/49 °
Mitre Capacity [right/left]	60/50 °
Weight	24.8 kg
Depth	470 mm
Length x Height	770 x 396 mm

Outstanding cutting performance in both small profiles and large construction timbers up to 110 x 303 mm  
 XPS Shadow line cut indicator provides fast accurate alignment of the blade while illuminating the work piece for increased productivity. No adjustment required

Heavy duty durability with the ability to fully adjust your machine to maintain accuracy over the life of the tool.

New quick release bevel stop setting provides accurate and simple setting of bevel angles up to 49° left and right

**Standard Equipment:** High Quality 60 tooth blade, Blade spanner, Dust bag, Material Clamp



**Mitre Saw Workstation**



**DE7035**  
 Heavy Duty Work Stand

- Accommodates all DeWALT mitre saws
- Lightweight aluminium construction provides portability in and around the jobsite
- 1.7 metre beam extends to support up to 3.9 metres for use with large workpieces
- The beam can support up to 182 kg providing maximum flexibility and capacity
- Work stops can be converted into end stops for repetitive cutting to length
- Integral folding legs avoids unnecessary assembly
- Integrated carry handle provides ease of transportation

**DE7033**  
 Compact Mitre Saw Workstation

- Cutting to length
- Roofing timbers
- All material support requirements
- Large workpiece support

Cat. No.	Fits	Description
DE7023	All DeWALT mitre saws	Heavy Duty Mitre Saw Workstation

**For DE7023**



Cat. No.	Item	Description
DE7024	1	Work support
DE7025	2	Mounting bracket
DE7027	3	Roller work support
DE7028	4	Extension arm support
DE7029	5	Increased width work support
DE7030	6	Increased length mitre brackets
DE7031	7	Heavy duty extension arm support
DE7026	Not illustrated	Carry strap

**260 mm Table Top Mitre Saw**

**DW713**



Powerful universal motor delivers plenty of cutting power in high torque cutting applications  
 Ultra smooth head actuation for safe precise cuts at any angle or compound angle  
 Mitre scale features 11 positive stops for amazingly accurate mitre cuts  
 Compact and lightweight with lock-down motor head effortless transportation  
 Extremely light unit weight with rugged construction for maximum jobsite versatility  
 Sliding fence for superior material support  
 Spindle lock for easy blade changes  
 Horizontal D-handle design for comfortable and fatigue-free operation  
 Precision mitre scale designed to provide trouble free adjustment for the life of the saw  
 Mitres up to 50 degrees both sides, bevel function up to 48 degrees  
 Cam action mitre lock with detent override for superior accuracy  
 Wide die cast aluminum base provides plenty of work-piece support, with base extension capabilities

**Standard Equipment:** 260 mm 24 tooth tungsten carbide tipped saw blade, Top guard with extraction, Blade spanner, Hex key, Push stick, Material Clamp

Power Input	1600 Watts
Power Output	1000 Watt
Blade Speed	5000 rpm
Blade Diameter	250 mm
Blade Bore	30 mm
Bevel Capacity	48/-3 °
Mitre Capacity [right/left]	50/50 °
Max. Cutting Capacity [Sawbench position 90°/90°]	95 x 89 mm
Max. Cutting Capacity [Sawbench position 45°/90°]	67 x 89 mm
Max. Cutting Capacity [Sawbench position 90°/45°]	95 x 61 mm
Max. Cutting Capacity [Sawbench position 45°/90°]	114 x 25 mm
Max. Depth of Cut	89 mm
Weight	13.6 kg
Depth	600 mm
Length x Height	485 x 425 mm



Combination saw with crosscut and ripping capabilities  
 Innovative guard design maximises safety and cutline visibility  
 XPS Worklight gives outstanding cut line visibility fast repeatable cuts no adjustment required giving greater productivity  
 Fully adjustable Stainless steel Mitre Detents - deliver accuracy over the life of the tool

**Standard Equipment:** XPS Worklight and Cut line indicator, Saw blade, Push Stick, Blade Wrench, Rip Fence, Table Saw Blade Guard, Allen Key, Material Clamp

Power Input	1600 Watts
Power Output	1030 Watt
Blade Speed	3300 rpm
Blade Diameter	305 mm
Blade Bore	30 mm
Bevel Capacity	48 °
Mitre Capacity (right/left)	50/50 °
Max. Cutting Capacity [Sawbench position 90°/90°]	51 mm
Weight	19.5 kg
Depth	600 mm
Length x Height	500 x 485 mm
Max. Cutting Capacity at 90°/90°	180 x 40 mm
Max. Ripping Capacity (right)	1 mm
Max. Ripping Capacity (left)	1 mm

# MACHINERY



**Heavy Duty Electronic Portable Table Saw**

**NEW DWE7491**



26.6 kg unit weight and optimised footprint make this the most portable saw in its class  
 Steel roll cage protects saw against jobsite drops and impacts  
 Rack and pinion fence system, front and rear fence lock and large, clear scales combine to give an extremely accurate and easy to use saw  
 Powerful 2000 Watt motor for high performance in all applications  
 Fence system provides 825 mm of rip capacity in a portable design for cutting large sheet materials to size  
 Cast table top design ensures accuracy and precision  
 Overload protection system ensures powerful performance in hard, wet or frozen woods  
 Quick bevel lock with large scale for easy, accurate adjustments.

**Standard Equipment:** 24 tooth SERIES 30<sup>®</sup> saw blade, Mitre fence, 2 blade spanners, Parallel fence, Dust port reducer, Push stick

Power Input	2000 W
Power Output	970 W
Blade Speed	3800 rpm
Blade Diameter	254 mm
Blade Bore	16 mm
Bevel Capacity	-3 to 48°
Max. Ripping Capacity [right]	825mm
Max. Ripping Capacity [left]	558mm
Max. Depth of Cut at 90°	79mm
Max. Depth of Cut at 45°	57mm
Table Size	670 x 630mm
Weight	26.6 kg
Depth	742 mm
Length	577 mm
Height	425 mm



DWE74911



DWE74912



**Heavy Duty Lightweight Table Saw**

**DW745**



22 kg unit weight and optimised footprint make this the most portable saw in its class  
 Fence system provides 410 mm of rip capacity in a portable design for cutting large sheet materials to size  
 Steel roll cage protects saw against jobsite drops and impacts  
 Powerful 1700 Watt motor for high performance in all applications

**Standard Equipment:** 24 tooth SERIES 30<sup>®</sup> saw blade, Mitre fence, 2 blade spanners, Parallel fence, Dust port reducer, Push stick

Power Input	1700 Watts
Power Output	1100 Watt
Blade Speed	3800 rpm
Blade Diameter	250 mm
Blade Bore	30 mm
Bevel Capacity	-3 to 48 °
Max. Ripping Capacity [right]	508 mm
Max. Ripping Capacity [left]	315 mm
Table Size	630 x 570 mm
Weight	22 kg
Depth	742 mm
Length x Height	577 x 425 mm



**Heavy Duty Rolling Saw Workstation**

**DE7400**




Large Heavy-Duty wheels designed to easily roll over steps, kerbs, and jobsite debris  
 Folding legs with quick release levers which retract under the stand in a few seconds for easy and quick transport  
 Lightweight aluminium construction which improves the portability  
 Heavy-Duty kick stand allows the stand to balance upright for mobility and storage

**Standard Equipment:** Universal Brackets to attach most Table saws

**305 mm Combination Saw**

**D27107 / D27107XPS\***



The next generation of TGS combination saw combines the accuracy of modern mitre saws with the power and capacity of dedicated table saws  
 Electronic pack provides massive overload protection and constant cutting speed for optimal cutting performance  
 305 mm head provides an massive 155 mm depth of cut  
 New mitre and bevel adjustment systems ensure high accuracy and simple adjustment

**Standard Equipment:** 48 tooth saw blade, Parallel fence, Riving knife, Push stick, Mitre dust collector, Table saw guard, Assembly wrench, Material Clamp

Power Input	2000 Watts
Power Output	1400 Watt
Blade Speed	4000 rpm
Blade Diameter	305 mm
Blade Bore	30 mm
Bevel Capacity	48 °
Mitre Capacity [right/left]	48/48 °
Max. Cutting Capacity [Sawbench position 90°/90°]	0 - 81 mm
Max. Cutting Capacity [Sawbench position 90°/45°]	0 - 56 mm
Weight	40 kg
Depth	800 mm
Length x Height	720 x 770 mm



**For D27107 / D27105**



Cat. No.	Item	Description
D271055	1	Sliding table for D27105/7 TGS
D271058	3	Right extension table for D27105/7 TGS
DE3460	4	Length stop for short workpieces
DE3462	5	Swivel stop
DE3474	6	Adjustable support stand
DE3491	7	Pair of guide rods, 500 mm length
DE3494	8	Pair of guide rods, 1000 mm length
DE3495	9	Material support plate
D271054	Illustrated	Dust extraction kit for D27105/7 TGS



**250 mm Combination Saw**

**DW743N**



90°/90°	140 x 68 mm	180 x 20 mm
45°/90°	95 x 70 mm	120 x 46 mm
90°/45°	70 x 95 mm	150 x 20 mm



The classic TGS flip-over bevelling saw  
 Rapid tool free transformation from a saw bench to a mitre saw provides flexibility in a range of site and workshop applications  
 New high output heavy duty high torque induction motor provides years of maintenance free use, suitable for workshop applications where low noise characteristics are desirable  
 Updated design for maximum cutting capacity across the range of mitre and bevel angles

**Standard Equipment:** 30 tooth saw blade, Parallel fence, Push stick, 4 detachable legs, Saw blade guard, Assembly tool, Material Clamp

Power Input	2000 Watts
Power Output	1550 Watt
Blade Speed	2850 rpm
Blade Diameter	250 mm
Blade Bore	30 mm
Bevel Capacity	45 °
Mitre Capacity (right/left)	45 / 45 °
Max. Cutting Capacity [Sawbench position 90°/90°]	0 - 70 mm
Max. Cutting Capacity [Sawbench position 90°/45°]	0 - 32 mm
Weight	37 kg
Depth	670 mm
Length x Height	700 x 750 mm



For DW743N



Cat. No.	Item	Description
DE3491	1	Pair of guide rods, 500 mm length
DE3460	2	Length stop for short workpieces
DE3474	3	Adjustable support stand
DE3494	4	Pair of guide rods, 1000 mm length
DE3462	5	Swivel stop
DE3495	6	Material support plate
DE3454	Illustrated	2 x push sticks
DE3472	Illustrated	Right side extension table
DE3489	Illustrated	Roller support
DE3496	Illustrated	Replacement mitre fence for use in bench saw mode
DE3497	Illustrated	Roller support table
DE3500	Illustrated	Shaving extraction kit
DE3461	Not illustrated	Clamp assembly
DE3471	Not illustrated	Single sliding table
DE3473	Not illustrated	Ripping/parallel fence



DE3497



DE3500



DE3496



DE3489




DE3472



DE3454

**300mm Radial Arm Saw**

**DW721KN/ DW722KN\***



Free standing radial arm saw with 507mm of crosscut capacity and 90 mm depth of cut  
 Solid cast Iron arm and four roller bearings in the motor head assembly ensure high accuracy and durability  
 Quiet maintenance free induction motor delivers high power even at the maximum cutting capacities of the machine. Also available in three phase voltage as a DW722KN  
 Simple yet positive controls and adjustment scales enable the width, depth and angle of cut to be set with accuracy in seconds


**Standard Equipment:** 32 tooth saw blade, Assembly tools, Automatic safety return, Blade brake, Legstand

Power Input	2000 Watts
Power Output	1580 Watt
Blade Speed	3000 rpm
Blade Diameter	300 mm
Blade Bore	30 mm
Max. Cutting Speed	36 m/sec
Max. Ripping Width	N/A mm
Weight	115 kg
Depth	1200 mm
Length x Height	1490 x 1470 mm

Also available in three phase voltage as a DW722KN on request

**350mm Radial Arm Saw**

**DW728KN**



The industrial radial arm saw performs accurate crosscuts time after time. Unrivalled reputation in the professional woodworking industry  
 Solid cast Iron arm machined to provide arm tracks with no inserts, increasing accuracy and life  
 Simple yet positive controls and adjustment scales enable the width, depth and angle of cut to be set with accuracy in seconds  
 Quiet maintenance free induction motor delivers high power even at the maximum cutting capacities of the machine. Also available in three phase voltage as DW729K

**Standard Equipment:** 32 tooth saw blade, Assembly tools, Automatic safety return, Blade brake, Legstand

Power Input	2200 Watts
Power Output	1820 Watt
Blade Speed	2800 rpm
Blade Diameter	350 mm
Blade Bore	30 mm
Max. Cutting Speed	53 m/sec
Max. Ripping Width	N/A mm
Weight	149 kg
Depth	1380 mm
Length x Height	1800 x 1450 mm

\*DW729K is a 3-phase unit

**155 mm 2 Speed Bandsaw**

**DW739\***



High quality, rigid, cast aluminium construction suitable for wood, non-ferrous metal, foam, composites and plastics applications  
 Two speed control for multiple applications  
 Large balanced aluminium band wheels with rubber linings ensure smooth quiet operation  
 Large aluminium saw table with high quality, wear resistant coating and replaceable insert

**Standard Equipment:** Saw blade, Rip fence

Power Input	749 Watts
Power Output	550 Watt
Max. Cutting Height	155 mm
Max. Cutting Width	310 mm
Cutting Speed	330/800 m/min
Table Size	380 x 380 mm
Weight	23.0 kg
Depth	520 mm
Length x Height	660 x 1000 mm

\*240V only





200 mm 2 SPEED BANDSAW

DW876\*



ALL STEEL WELDED CONSTRUCTION PROVIDES EXTREME RIGIDITY AND ACCURACY EVEN AT MAXIMUM DEPTHS OF CUT  
500 x 500 mm ALUMINIUM EXTRUDED TABLE PROVIDES A LARGE SUPPORT AREA BUILT FOR FLATNESS AND ACCURACY  
EASY TO ADJUST BLADE TENSIONING WITH INTEGRATED TENSION INDICATOR FOR DIFFERENT BLADE TYPES AND APPLICATIONS  
MICRO SWITCH INCORPORATED IN DOOR TO PREVENT ACCIDENTAL STARTING WHILE OPEN

**STANDARD EQUIPMENT:** DIAMOND GROUND STEEL BLADE, NO VOLT RELEASE SWITCH, LEGSTAND, MITRE AND RIP FENCE

Power Input	1000 Watts
Power Output	750 Watt
Max. Cutting Height	200 mm
Max. Cutting Width	310 mm
Cutting Speed	380/880 m/min
Table Size	500x500 mm
Weight	54.0 kg
Depth	650 mm
Length x Height	770 x 1590 mm

\*240V ONLY

MACHINERY PLANNER THICKNESSER

D27300\*



LARGE ALUMINIUM FENCE FOR ACCURATE BEVEL ANGLES IN THE SURFACE PLANING MODE  
LARGE, EXTRUDED ALUMINIUM TOP PLANING TABLE FOR HIGH ACCURACY AND EASE OF USE  
INTEGRATED MOTOR DESIGN TO SAVE SPACE AND IMPROVE TRANSPORTATION  
NEW CONTROL DESIGN TO IMPROVE EASE OF USE AND ACCURACY OF ADJUSTMENT

**STANDARD EQUIPMENT:** HSS KNIVES, ADJUSTABLE FENCE, ALLEN KEYS, SPANNER, BLADE SETTING GAUGE, DUST EXTRACTION MOUTHPIECE, PUSH STICK, LEGSET

Power Input	2100 Watts
Power Output	1600 Watt
No Load Speed	6200 rpm
Max. Capacity	260 mm
Max. Depth of Cut	4 mm
Max. Planing Depth	3 mm
Planer Table Size	1000 x 260 mm
Thicknesser Table Size	500 x 250 mm
Max. Thicknesser Capacity	160 mm
Feed Rate	5 m/min
Weight	53 kg
Depth	700 mm
Length x Height	1050 x 950 mm

\*240V ONLY

317 mm PORTABLE THICKNESSER

DW733



4 POST COLUMN DESIGN ALLOWS THE CUTTER HEAD TO MOVE UP AND DOWN SMOOTHLY AND ACCURATELY  
LARGE INFEED AND OUTFEED TABLES PROVIDE ADDED MATERIAL SUPPORT WHEN CUTTING LARGE MATERIALS TO IMPROVE THE SURFACE FINISH  
POWERFUL 1800 WATT MOTOR MAKES LARGE SURFACE PLANING EASY  
DESIGNED FOR PORTABILITY ON THE JOB SITE AND IN SMALL WORKSHOPS

**STANDARD EQUIPMENT:** DUST SHROUD AND ADAPTER, ALLEN KEY, BLADE SPANNER, BLADE CHANGING GUIDES

Power Input	1800 Watts
Power Output	1000 Watt
No Load Speed	10000 rpm
Max. Capacity	317 mm
Max. Planing Depth	2 mm
Max. Thicknesser Capacity	152 mm
Feed Rate	8 m/min
Weight	33.6 kg
Depth	310 mm
Length x Height	520 x 445 mm

Cat. No. Page

DC710D2/DCD710C2/DCD710N*	14
DCF815D2/DCF815C2/DCF815N*	14
DCF813D2/C2	14
DCF610D2/DCF610C2	14
DCS310D2/DCS310N*	14
DCT410D1/DCT412D1*	15
DCT414D1/DCT414N*	15
DCT416D1	15
DCL510N	15
DCH143M2/DCH143N*	16
DCD937M2/DCD937P2*	16
DCD932M2/DCD932P2*	16
DCD737D2/DCD737M2*/DCD737P2**	16
DCD732D2/DCD732M2*/DCD732P2**	16
DCD734C2	17
DCF825M2/DCF825N*	17
DCF836M2/DCF836D2/DCF836N*	17
DCF830M2/DCF830N*	17
DCF621P2K/DCF621D2K/DCF621D2/DCF621N*	17
DCD720C1/DCD720N*	18
DCL030*	18
DCR020	18
DCR019	18
DCR017	19
DCR016	19
DCR002	19
DCR006	19
DCB090	20
DCV582	20
DCH273P2/DCH273N*/DCH273P2T	23
DCH274P2/DCH274N*/DCH274P2T	23
DCH275P2	23
D25303DH	23
DCD995M2/DCD995P2*	24
DCD990M2/DCD990P2*	24
DCD795D2/DCD795M2*/DCD795P2**	24
DCD790D2/DCD790M2*/DCD790P2**	24
DCD776C2	25
DCD771C2	25
DCF895M2/DCF895N*	25
DCF886M2/DCF886D2/DCF886N*	25
DCF880M2/DCF880N*	25
DCF899P2	26
DCF620P2K/DCF620D2K/DCF620D2/DCF20N*	26
DCSS51N	26
DCS387M2/DCS387N*	26
DCS380M2/DCS380N*	26
DCS371N	27
DCS331M2/DCS331N*	27
DCS391M2/DCS391N*	27
DCS373M2/DCS373N*	27
DCGG571M1	27
DCN690M2/DCN690N/DCN691*	28
DCN692P2/DCN692N*	28
DCN693P2/DCN693N*/DCN694P2/DCN694N*	28
DCG412M2/DCG412N*	28
DCD740C1/DCD740N*	28
DCS355D2/DCS355M2/DCS355N*	29
DCL040*	29
DCL050	29
DCL060	29
DCL043	29
DCL043	29
DCK211C2T/DCK211D2T*	30
DCK211C2FT/DCK211D2FT	30
DCK310C2T	30
DCK410C3FT	30
DCK235C2*/M2	30
DCK232C2	30
DCK245D2/M2*	30
DCK250D2/M2/P2*	30
DCK255M2/P2*	31

DC262P2	31
DCK285C2*/M2	31
DCK282C2	31
DCK290M2	31
DCK295M2	31
DCK291MS	31
DCK288M2	31
DCK287M2	31
DCK293M2	31
DCK258D2T	32
DCK258M2T	32
DCK259D2T	32
DCK259M2T	32
DCK252D2T	32
DCK253M2T	32
DCK257D2T	32
DCK273M2T	32
DCK254M2T	33
DCK256M2T	33
DCK288M2T	33
DCK382M2T	33
DCK271M2	33
DCK294M2	33
DCK591M3	33
DCK550M3T	33
DCK594M3	33
DCB080	34
DCB360	34
DCB361	34
DCF680G2/DCF680G2F*	35
DCF682G1	35
DCL023N*	35
DCH363D2	37
DCH364M2	37
DCH365M2	37
D25302DH	37
DC901M2	37
DC800M2	38
DC300M2	38
DC415M2	38
DC305M2	38
DW083K	40
DW085K	40
DW0851-XJ	40
DW088K	40
DW0822-XJ	40
DW089K	41
DW0811-Xi	41
DW096PK	41
DW079KH	41
DW079PKH	41
DW03050	42
DW03101	42
DW274K/DW274KN*	45
DW275K/DW275KN*	45
DW266	45
DW268K	45
DW269K	45
DW263K	46
DW264K	46
DW292	46
DW294	46
D21520	47
D21510	47
DWD024/DWD024K/DWD024S/DWD024KS*	47
D21721K	48
D21805K/D21805KS*	48
DWD522KS	48
DWD524KS	48
DWD530KS	49
D21570K	49
DWD014S	49

DWD112/DWD112S*	49
DWD115KS	50
DW217	50
DW221	50
DW236i	50
D21441	50
DW246	51
DWD221	51
D21160*	51
DWE1622K	51
D21580K	52
D21583K	52
D21585	52
D215821	52
D215831	52
D215851	53
D24000/D24000S	53
DWC410*	53
DW862	53
D25032K*/D25033K/D25033C	55
D25133K	55
D25134K	55
D25262	55
D25144K	55
D25052K/D25052KT*	56
D25323K/D25313K*	56
D25324K	56
D25413K	56
D25414KT	56
D25415K	57
D25501K	57
D25601K	57
D25602K	57
D25603K*	57
D25721K	58
D25722K	58
D25723K	58
D25762K	58
D25763K	59
D25820K	59
D25430K	59
D25831K	59
D25871K	60
D25899K	60
D25901K	60
D25941K	60
D25960K	60
D25961K	61
D25980/D25980K*	61
DCH365M2	62
D25325K	62
D25302DH	63
D25300DH	63
D25301D	63
DWB800	63
DWV902M	65
DWV900L	65
DWH051K	65
DWH052K	65
DWV9500-XJ	65
DWV9210	65
DW050K	65
DWV9220	65
DWE4001	67
DWE4002	67
DWE4010/DWE4010T	67
DWE4150	67
DWE4120	67
DWE4205	68
DWE4216	68
DWE4212	68
D28114	68

DWE4151	68
DWE4215	69
D28135/D28135K*	69
D28065	69
DW831	69
DWE46101	69
DWE46150	70
DWE46170	70
D28141	70
DWE4557	70
DWE4597	70
DWE492	70
DWE493	71
DWE4559	71
DWE4579	71
DWE4887N	71
D28720	71
D28715	72
DWP849X	72
D26204K	74
DW621K/DW621	74
DW622K/DW622	74
DW625EK/DW625E	74
DWE6005	77
DW682K	77
D26500/D26500K	77
DW680/DW680K	78
DW677	78
D26676	78
DWE6411	78
D26422/D26423	78
D26420/D26421*	79
DWE6423	79
D26410	79
DW443*	79
DW752R	80
D26411	80
D26414	80
DWE315/DWE315KT*	82
DWS520KR	82
DWS520K	82
DW331K	83
DW333K*	83
DW349	83
DWE560/DWE560K	83
D23700	83
DW311K	84
DW310K	84
DW305PK	84
DWE357K	84
DWE396	85
DWE397	85
DWE398	85
DWE399	85
DW777/DW771*	88
DWS778	88
DWS780	88
DE7023	89
DW713	89
D27113	90
DWE7491	92
DW745	92
DE7400	92
D27107/D27107XPS*	93
DW743N	94
DW721KN/DW722KN*	95
DW728KN	95
DW739*	95
DW876*	96
D27300*	96
DW733	96





# ONLINE SERVICE

[www.2helpu.com](http://www.2helpu.com)



Visit our DEWALT service site for:

- Frequently Asked Questions
- Your nearest authorised DEWALT service agent
- Drawings, exploded views and instruction manuals of all DEWALT tools
- Our warranty policy

You can also email us directly via the 'Ask a question' section. [www.2helpu.com](http://www.2helpu.com) is also available from [www.DEWALT.ae](http://www.DEWALT.ae). Click on the 'service' tab.

## GENUINE PARTS

All our spare parts are genuine and therefore they:

- Are guaranteed to fit and work correctly
- Have the correct specification
  - Carbon brushes quality for optimum performance
  - Safety guards which meet safety standards
  - Grease and lubrication (longer life time)
- Meet standards and regulations
  - Machinery directives, CE, WEEE, REACH, RoHS, TUV, Kema etc standards



## REGISTER TO MY DEWALT AND GET A CHANCE TO WIN OUR BRAND NEW CORDLESS MOTION SENSITIVE SCREWDRIVER

**Login**

**REGISTER**

USERNAME

PASSWORD


Remember me

**Login**

[Forget your Password?](#)

[Resend confirmation mail](#)

MyDEWALT user has a chance to win a CORDLESS MOTION SENSITIVE SCREWDRIVER. Simply register to MyDEWALT & add your products to your personal MyDEWALT tool overview & get enrolled for a lucky draw !

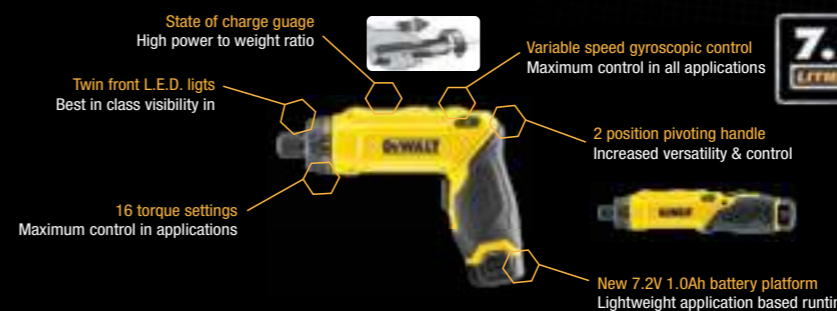

### Specifications

No-Load Speed	0 - 430 rpm
Max Torque	4 Nm
Torque settings	15
Tool Holder	6.35 mm
Weight	0.5 kg

### MYDEWALT BENEFITS

Register all of your DEWALT tools and accessories. Be amongst the first to hear about the latest product from DEWALT and more...

# DEWALT®

## POWERTOOLS CATALOGUE 2015-16

### DEWALT Industrial Tools MIDDLE EAST HEADQUARTERS

P.O. Box: 17164, Jebel Ali, Dubai, U.A.E. Tel: +971 4 8863030, Fax: +971 4 8863333  
Email: dewalt.marketing@sbdinc.com

[www.DEWALT.ae](http://www.DEWALT.ae)

The yellow and black colour scheme is used on DeWALT Power Tools and Accessories as a trademark. DeWALT reserves the right to change any deal at any time without notice. Deals available while stocks last.

Your DeWALT Dealer:

Be the first to see product news and special offers from DeWALT...  
Register at MyDeWALT simply go to [www.DeWALT.ae/MyDeWALT](http://www.DeWALT.ae/MyDeWALT)

**MY DEWALT®**

MP17191-AE